

# HiKOKI

HIGH PERFORMANCE POWER TOOLS

Power tools  
catalogue

2020 - 2021



# Innovation never stops

Ever since 1948 we've been designing and developing high performance power tools. For over 70 years our Japanese engineers have utilized their technological knowledge, skills and experience to constantly improve our power tools. Guided by Japanese design principles, every element of our products is chosen to improve performance, balance, usability, longevity and control. Attention to detail that ensures the professional finishes every single job as easy as possible. That's what drives us and keeps us one step ahead.



We are proud to introduce our new 2020 – 2021 catalogue. Have a look at this year's HiKOKI high performance power Tool range. All bundled in a clear and easy to navigate book. Some you may already know and some are provided with the newest designs and latest technologies that our in-house designers and engineers have been working on.



**Contents.**  
Everything  
to reach  
the highest  
performance.



## **Introduction**

## **HiKOKI Service**

### **Technologies**

MultiVolt	10
Gasless	11
IP56	12
Brushless	13
Multiple Protection Circuit (MPC)	14
Reactive Force Control (RFC)	14
User Vibration Protection (UVP)	14
Low Vibration Handle (LVH)	14
Lithium Ion Batteries	15
Aluminium Housing Body (AHB)	15
Triple Hammer	15
Auto Mode	15
One System, One Solution	16

### **Cordless**

MultiVolt	20
MultiVolt Combo	30
18Volt	36
Accessories	55
Coming Soon - Cordless 57	
Coming Soon - Grinders 87	

### **Pneumatic**

Nailers	60
Wrenches	63
Sander	64

### **Drilling**

Drills	66
--------	----

### **Fastening**

Screw Drivers	70
Impact Wrenches	71

### **Rotary & Demolition**

Rotary Hammers	75
Demolition Hammers	76

### **Grinding & Cutting**

Angle Grinders	82
Cut Off Saw	89
Nibbler	90
Accessories	91

### **Polishing & Sanding**

Sanders	94
Polisher	96

### **Sawing**

Circular Saws	98
Table Saw	99
Compound Mitre Saws	100
Jig Saws	102
Accessories	103

### **Planing & Routing**

Planers	106
Router	107

### **Air Displacement**

Heat Guns	110
Vacuums	111
Vacuum Accessories	112

### **Outdoor Power Equipment**

High Pressure Washers	114
Accessories for High Pressure Washers	115
Trimmers, Chain Saw and Blower	116

### **Accessories**

Nails	118
Drilling & Driving	119
Demolition Bits	119
Grinding	120
Saw Blades	121

### **Major Parts List**

Cordless	122
AC Tools	123

# Index

## A

---

AC Major Parts List	123
Accessories For Screw Drivers	70
AW130	114
AW150	114
AW18DBL	50

## B

---

B16RM	67
BSL1830C	55
BSL18UA	52
BSL36A18	55
BSL36B18	55

## C

---

C10FCE2	100
C10FSB	101
C10RJ	99
C18DBAL	47
C18DBL	47
C18DSL	48
C3607DA	28
C3607DRA	26
C3610DRA	26
C3610DRJ	25
C7MFA	98
C7UR	98
C8FSE	100
C9SA3	99
CB18DBL	48
CC14SF	89
CE18DSL	44
CG36DA	29
CG36DA	116
CH18DSL	50
CH3656DA	29
CH3656DA	116
Circular Saw Dust Bag	104
CJ18DSL	48
CJ36DA	27
CJ36DB	27
CJ90VST	102

CN16SA	90
CN18DSL	44
Cordless Major Parts List	122
CR18DBL	46
CR36DA	27
CS3630DA	29
CS3630DA	116
Cutting Guard Clip	92
CV18DBL	49

## D

---

D13	67
D13VG	66
D13VL	66
DB3DL2	53
Demolition Bits	119
DH18DBL	38
DH18DSL	38
DH26PC2	75
DH28PEC	75
DH36DMA	21
DH36DPC	21
DH40MEY	76
DH45MEY	77
DH52MEY	77
DN18DSL	36
Drilling and Driving	119
DS18DBL2	37
DS36DA	20
Dust Bags	96
Dust Collectors	91
Dust Extractor Adapters	104
DV16VSS	68
DV18DBL2	37
DV18DJL	36
DV20VD	69
DV22V	69
DV36DA	20

## E

---

EBM315	55
ET36A	55
Extension Guide Assembly	104

## F

---

FCJ65V3	102
Flanges	103
FSV10SA	94

## G

---

G10SR4	84
G13SB3	84
G13SC2	85
G13SE2	85
G13SR4	84
G13VE	83
G13YC2	85
G18DBBAL	45
G18DBL	45
G18DSL	45
G18SE4	86
G23ST	86
G23UDY2	87
G3613DA	24
G3613DB	24
G3623DA	24
GP2S2	88
GP3V	88
GP5V	88
Grinding & Cutting Accessories	120
Guides	103

## H

---

H41ME	78
H45MEY	78
H60MEY	79
H65SB3	79
H90SG	80
Hammer Grease	80
High Pressure Washers Accessories	115



## K

KC18D6P	34
KC18D8P	34
KC18DBDL	30
KC18DDBL	32
KC18DPL	31
KC36D5P	33
KC36DBDL	30
KC36DDBL	32
KC36DPL2	31
KC36DRBL2	33

## M

M12SE	107
Mitre Saw Dust Bags	104

## N

N3804AB3	60
Nails	118
	46
NR1890DBCL	43
NR90AD	61
NT1850DBSL	42
NT1865DBAL	43
NT1865DBSL	42
NT50AE2	60
NT65M2	60
NT65MA4	61
NV65AF3	62

## P

P18DSL	49
P20SF	106
P20ST	106
Planer Blades	106
Punch and Die	90

## R

R18DSAL	51
R18DSL	51
RB18DSL	51

RB36DA	29
RB36DA	116
RH600T	110
RH650V	110
RP250YDL	111
RP300YDL	111
RP3608DA	28
Rubber Pads	92

## S

Safety Guards	91
Sander & Polisher Attachments	96
Saw Blades	121
SB8V2	95
SDS Max	119
SDS Plus	119
Side Handles	92
Side Handles	104
Site Bags	55
SP18VA	96
Spanners and Wrenches	92
Stackable Cases	56
SV12SG	94
SV13YA	94
SV15A	64
SV15YC	95

## U

UB18DA	53
UB18DGL	52
UB18DJL	52
UC18YML2	55
UC18YSL3	55
UC18YTSL	55
UC3SFL	55
UR18DSDL	54
UR18DSML	54

## V

Vacuum Accessories	112
VB3616DA	25
Vice Assembly	104

## W

W6VB3	70
W8VB2	70
WF18DSL	40
WH18DBDL2	39
WH18DSDL	39
WH36DB	22
Wheel Nuts	91
Wheel Washers	91
WR14A	63
WR18DBDL2	41
WR18DSDL	41
WR18DSHL	41
WR22SE	71
WR25SE	71
WR27A	63
WR36DA	23
WR36DB	23
WR36DC	22
Wrenches	103
WW10A	64
WW8A	64

## Safety

Double insulation power tools, indicated by the double square mark, can be operated without external grounding. Every HiKOKI power tool is designed and manufactured considering safety and usability. HiKOKI power tools are provided with various safety features like brakes, covers and clutches.

## Power Input

HiKOKI power tools employ series motors whose modern design is based on many years of experience. Unless otherwise indicated in the catalogue, power input (Watt) is based on 240V.

## General Precautions

1. Read and follow handling instructions provided with the power tool and comply with all the operating instructions and warnings.
2. Never let children use the power tool.
3. Keep others, especially children, away from the tool.
4. Wear eye protection to protect the eyes.
5. Never touch blades or cutters during operation.
6. Avoid unintentional contact with the power switch when the tool is connected to a power source.
7. To ensure proper function of the tool, DO NOT remove installed covers or screws. DO NOT modify components and parts.
8. Prior to operation, carefully inspect the tool to ensure all the parts are properly functioning.
9. Immediately stop operation if abnormalities are noted.
10. Ensure that motor ventilation opening is kept fully open.
11. Always keep the blades and cutters sharp and clean.
12. Have the power tool inspected at proper regular intervals by an authorized Service Centre.
13. Maintain the proper care and cleanliness of the power tool.
14. Consult an authorised Service Centre for repair and/or part replacement.
15. DO NOT use the power tool for other application than those specified in the handling instructions.
16. DO NOT use the tool for work beyond its prescribed capability.
17. To avoid possible electric shock, DO NOT use the power tool in wet areas.
18. Ensure that the applied voltage is the same as that specified on the nameplate.
19. Ensure that electric plug is plugged into a matching receptacle that is properly installed and grounded in accordance with the instruction manual, all applicable local codes, and ordinances, except for double insulated tools.
20. Ensure that the power supply is disconnected after operation.
21. DO NOT lift the power tool with the cord or remove the plug from the receptacle by pulling the cord.
22. Always handle the power tool with care.
23. Proper posture is essential for safe operation.
24. Dress properly and work in personal protective clothing, shoes and equipment.
25. Always keep the work area well-lit and in good order.
26. When not in use, store the power tool in a dry place.
27. DO NOT stare into LASER beam.

## Notes

- HiKOKI Power Tools Australia reserves the right to change specifications of parts and accessories of HiKOKI power tools without notice.
- Figures of battery capacity are nominal values.
- Some models in this catalogue are shown with optional accessories and fasteners such as screw, nail, bit, socket, blade, battery and grinding wheel.
- Product images are for display purposes only.
- Accessories are not included unless otherwise stated.
- Not all items shown in this catalogue are held in stock by retailers at all times, orders are subject to product availability at time of purchase.
- Product information and specifications should be confirmed at time of purchase.
- Errors & Omissions Excepted.



## Welcome to the HiKOKI 2020/21 Catalogue!

It's hard to believe it's already been 18 months since our evolution from Hitachi Power Tools to HiKOKI High Performance Power Tools. When we re-launched, we were the first to admit that HiKOKI was a unique and unfamiliar name. But, like everything we do, it has significant meaning. "Koki" is the Japanese term for tool, and the prefix "Hi" stands for high quality, highly innovative technology and high reliability.

Under the HiKOKI brand, we've proudly maximised our capacity and capability to accelerate the research and development of high-performance power tools in a way never seen before in the Australian power tools market.

Our new product pipeline sees "world first" technology continually placed in the hands of Australian professionals like you, so you can get the job done faster and easier. With our legacy of over 70 years of experience, and with more than 2,500 patents and industry-first products waiting their time to reach the market, we are only just getting started.

The HiKOKI cordless MultiVolt battery platform is expanding rapidly with over 70 compatible tools and many more in the pipeline in 2020 alone. And, as you will see as you peruse this catalogue, our wide range of high-quality products cater for all professional trades – whether it's construction, carpentry, plumbing, electrical, or mechanics.

For those of you already purchasing HiKOKI Power Tools and looking to expand your collection, we thank you for your continued loyalty. For those who are still considering us, we trust this catalogue will entice you to start, or add to, your collection of HiKOKI High Performance Power Tools.

Yours Sincerely,



**Yoji Higashida**  
Managing Director  
HiKOKI Power Tools Australia





## HiKOKI MultiVolt. 36V battery power compatible with your 18V tools.\*

This is the technical advance that trade professionals have been waiting for.



A next generation battery system which offers the ultimate flexibility of instantly switching from powering 36V tools to powering virtually every one of our 18V tools.

HiKOKI MultiVolt. It's AC Power with DC freedom now made even better by a level of convenience and superior technology you won't get from other manufacturers.

Double voltage supply in one battery means you simply snap it into place and power on, regardless of whether you're using 36V or 18V tools.

This MultiVolt BSL 36A18 battery is compact and lightweight. In fact, it's almost the same size and weight as an existing 18V battery. However, when paired with 36V tools, it delivers electric class cordless power.

Now, whether you're working with 18V or 36V, with one quick click you're powering on.

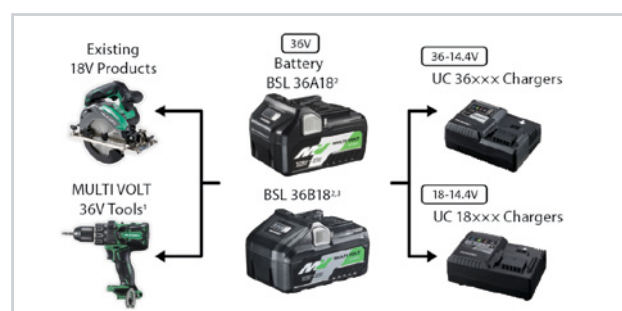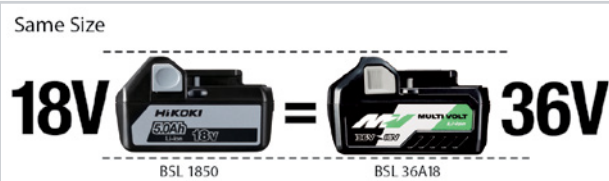

\*References: 1. Not compatible with the following existing batteries: BSL3620/3625/3626/3660, BSL18xx and BSL14xx series. 2. Not compatible with the existing 36V products that are compatible with BSL3620, BSL3625, BSL3626 or BSL3660. 3. Not compatible with the 14.4-36V UC36YRSL charger and the following 18V tools: AW18DBL/C18DBL/R18DSAL/UB18DGL/UF18D-SL/UF18DSAL/UR18DSL/UR18DSAL/UR18DSDL.







## Nail a more cost-effective solution with HiKOKI Gasless Nailers.

Now as fast as traditional gas-driven nailers but safer, cleaner, easier and far more cost effective to use.


Not to mention much less noisy and more environmentally friendly.

Presenting HiKOKI Gasless Nailers, a great example of HiKOKI innovation in action. The secret lies in combining cordless and pneumatic technology in a unique compressed air driven system that's powerful, fast, portable and lightweight.

With every nail being driven by compressed air, there's no need for the hassle or expense of replacing gas cells. Given that gas nailers are approximately 50% more expensive to run, it adds up to an amazing operating saving over the life of your tool.

Furthermore, there are no combustion chambers to regularly clean and fewer parts to manage, so your service, down time and maintenance costs will all be drastically reduced.

With a HiKOKI Gasless Nailer, your safety is paramount because an automatic trigger lock eliminates unwanted firing. Plus, the shock absorption system incorporated throughout also makes them the most comfortable nailers you've ever used.

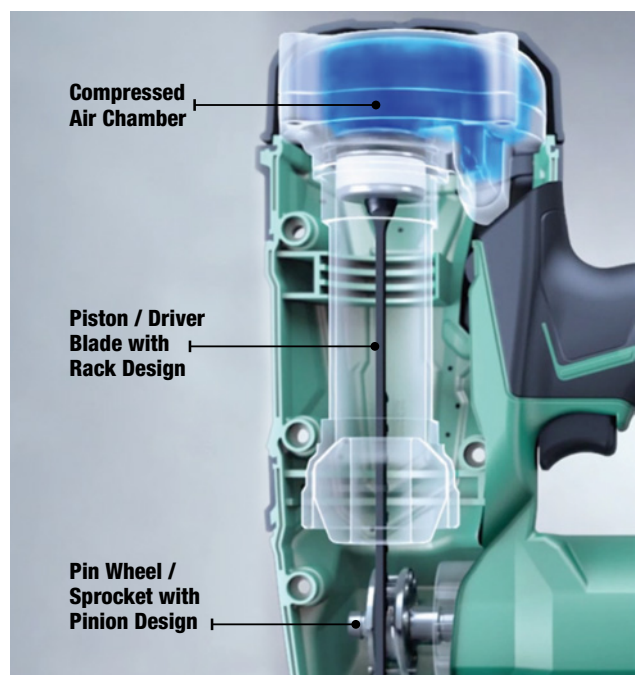



# Trust HiKOKI to be rated superior for dust and water resistance.

IP56 is an independent stamp of quality that HiKOKI Power Tools hold as a bench mark.

In technical terms, the IP code or 'Ingress Protection' is a standard developed by the International Electrotechnical Commission (IEC) to measure the degrees of protection offered by electrical equipment enclosures against the ingress of solid foreign objects like dust or the ingress of water to hazardous parts.

In real terms, every tradie knows that two potential onsite enemies threatening operating efficiency and long life are dust and water getting into the tool's enclosure.

That's why it's so reassuring to see the IP56 sticker on the side of your HiKOKI tool.



= **Ingress Protection**

## IP 5X

**Degrees of protection against access to hazardous parts and ingress of solid foreign objects.**



= Dust-protected: Ingress of dust is not totally prevented, but dust shall not penetrate in a quantity to interfere with satisfactory operation of the apparatus or to impair safety

## IP X6

**Degrees of protection against ingress of water.**



= Water projected in powerful jets against the enclosure from any direction shall have no harmful effects.

Note: Our IP56-compliant products are designed to withstand the effects of dust and water, but there is no guarantee that they will not malfunction. Do not use or leave the machine in locations where it is subject to excessive amounts of dust or it is submerged in water or subject to rainwater. (Only the main unit conforms to the IP56 protection class ratings when equipped with a battery.)







## Power on long and strong with HiKOKI brushless motor corded tools.

A HiKOKI technical advancement. After pioneering the use of brushless motors in cordless tools, now we've applied their benefits to electric corded tools with astonishing results.

Get your hands on a compact and lightweight range of tools with really heavy-duty power. By reducing the number of moving parts in the motor we've decreased tool size and weight but increased power output.

HiKOKI brushless AC motors deliver greater durability and longer life even under heavy use. There are no carbon brushes to regularly replace and no risk of armature burnout, layer short or commutator wear.

While the electronic circuit board is silicone-coated to protect from dust.

Because brushless motors run cooler, look forward to stable performance even when there's voltage drop from using long extension cords. Equipped with a highly efficient inverter circuit, HiKOKI AC brushless motors are compatible with engine generators that don't have an onboard inverter.



Long Lifetime,  
Maintenance-free



Compatible with  
Engine Generators<sup>1</sup>




Compact,  
Lightweight



Stable Performance  
during Voltage Drops<sup>1</sup>

Reference: 1. The features of the AC (corded) brushless motor tools only.

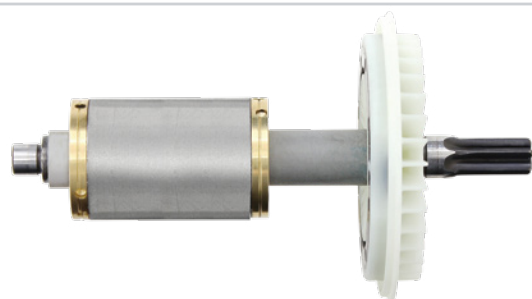

**BRUSH  
LESS**  
Brushless Motor

# Multiple Protection Circuit (MPC)




A very clever feature of HiKOKI Li-ion batteries. MPC protects against battery failure and protects the tool it's powering by guarding against overheating and overloading. Plus, the multiple protection cell continuously monitors every cell in the battery. In the event of a jam or overload, MPC overload protection stops the tool instantly. MPC also extends battery life by protecting against over charge and over discharge.

Heat sensor

Air vents for cooling between cells

Multiple Protection Circuit

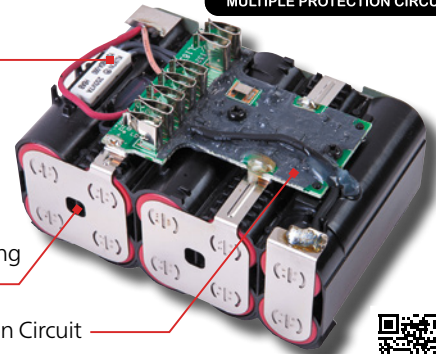

# Reactive Force Control (RFC)



With HiKOKI Power Tools your safety and well-being comes first. Reactive Force Control (RFC) has been developed and designed to sense when a tool bit is overburdened suddenly during operation.



When such an event occurs, RFC stops the motor instantly to reduce dangerous twisting and jerking of the main unit helping to safeguard operator safety.



# User Vibration Protection (UVP)



Our policy is to design tools with maximum inbuilt protection against excessive vibration, whether equipping them with spring-operated dynamic vibration absorbers or building-in special, vibration-absorbing handles. Not only is UVP good for operator safety by helping to safeguard against White Knuckle Syndrome, it's good for business. After all, the higher the degree of comfort and ease of use, the more efficient an operator can be for longer.

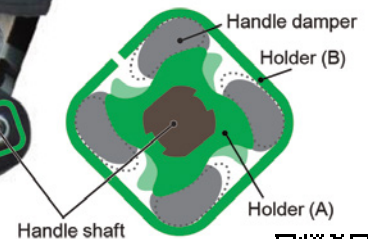

# Low Vibration Handle (LVH)



The tougher the job the more you'll appreciate the highly evolved HiKOKI Low Vibration Handle (LVH) feature. Designed as a dual action system, the upper handle section houses a coiled spring and counter balance weight while the lower section employs a specially designed hinge to help minimise vibration.

Reducing vibration also helps reduce operator fatigue which helps extend usage time.



# Lithium Ion (Li-ion) Batteries

**Li-ion**

Experience less weight and more run time with HiKOKI Lithium ion batteries. Weighing up to 40% less than their Ni-Cd and Ni-MH counterparts, these lightweight batteries make for lighter tools with greater operator portability. Each Lithium ion cell can store considerably more energy than older style battery technology giving you considerably increased run time. They're good for the job and for your business.




# Aluminium Housing Body (AHB)

**AHB**  
ALUMINIUM HOUSING BODY

AHB is the feature to look for when you want outstandingly robust and highly durable power tools. In effect, the motor is shielded by a double protective armour consisting of a stator holder contained within a die-cast outer aluminium housing body (AHB).

This results in the durability of both the motor and the tool body being remarkably improved. AHB is only available on selected HiKOKI tools.

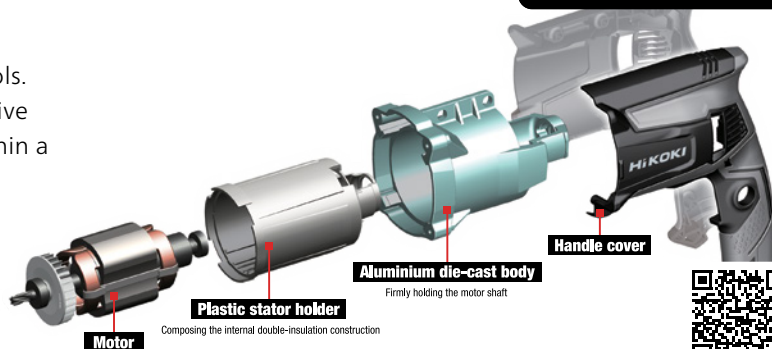

# Triple Hammer

**TRIPLE HAMMER**

Three strikes and vibration is on the way out. Designed by HiKOKI with three hammers, the triple hammer reduces vibration by making three impacts per rotation instead of the conventional two.

The results are greater operator comfort and ease of use with less screw head slippage. An exceptionally well balanced and ergonomic power tool.



**CONVENTIONAL**  
2pcs Hammer claw  
2 hitting points




**TRIPLE HAMMER**  
3pcs Hammer claw  
3 hitting points



# Auto Mode

**AUTO**

Auto Mode is the intelligent electronic process that works in conjunction with HiKOKI cordless brushless motors. Auto Mode conserves energy and regulates power based on need, automatically adjusting power as the load increases or decreases. Auto Mode works to optimise operation by reducing vibrations and operating noise and helping increase battery run time.

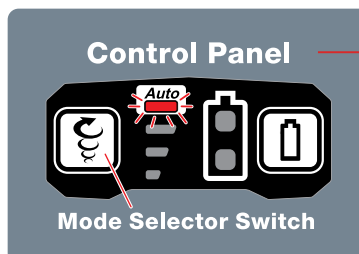



# One System.









**6** YEAR  
POWER TOOLS  
WARRANTY\*

## OUR BEST WARRANTY EVER. GUARANTEED.

Get your work done faster and easier, safe in the knowledge HiKOKI Power Tools are manufactured to exacting, world class standards. All backed by the peace of mind of our industry-leading **6 Year Warranty**.\* It's one more reason why you can have complete confidence in the tools you use, and the company who backs them. HiKOKI has over 70 years of power tool experience and an unmatched track record of innovation as Hitachi. Visit [hikokipowertools.com.au](http://hikokipowertools.com.au)

\*6 year warranty on selected products with online registration.  
For details visit [www.hikokipowertools.com.au](http://www.hikokipowertools.com.au)

**HiKOKI**  
HIGH PERFORMANCE POWER TOOLS



# 01 Cordless





**DV36DA(HRZ) 36V Brushless Impact (Hammer) Driver Drill**

Available Kit and Naked



4966376313280

- RFC (Reactive Force Control)
- 2 speed gearbox with all metal gears
- 13mm all metal keyless chuck
- 22 stage adjustable clutch

**Specifications**

	Masonry	20mm
Capacity	Wood	102mm
	Steel	16mm
No load speed	0 - 500 / 0 - 2,100 (min-1)	
No load impact rate	0 - 31,500 (min-1)	
Max. torque	Hard	138Nm
	Soft	64Nm
Weight	2.7kg (with BSL36A18 battery)	
Length	204mm	
Battery type	BSL36A18 : Li-ion MultiVolt (Battery A)	
Standard accessories	2 x BSL36A18 MultiVolt batteries, UC18YSL3 rapid charger, side handle, belt hook, driver bit and stackable case	



Naked: DV36DA(H4Z)



4966376313273

**DS36DA(HRZ) 36V Brushless Driver Drill**

Available Kit and Naked



4966376311446

- RFC (Reactive Force Control)
- 2 speed gearbox with all metal gears
- 13mm all metal keyless chuck
- 22 stage adjustable clutch

**Specifications**

	Wood	102mm
Capacity	Steel	16mm
No load speed	0 - 500 / 0 - 2,100 (min-1)	
Max. torque	Hard	138Nm
	Soft	64Nm
Weight	2.7kg (with BSL36A18 battery)	
Length	204mm	
Battery type	BSL36A18 : Li-ion MultiVolt (Battery A)	
Standard accessories	2 x BSL36A18 MultiVolt batteries, UC18YSL3 rapid charger, side handle, belt hook, driver bit and stackable case	



Naked: DS36DA(H4Z)



4966376311439

## DH36DPC(HRZ) 36V Brushless SDS Plus Rotary Hammer with Quick Release Chuck

Available Kit and Naked



4966376307999

- RFC (Reactive Force Control)
- 3 mode: rotation + hammering, hammer only and rotation only
- Electronic 4 mode speed adjustment
- Quick release chuck allows switching between SDS plus and 13mm keyless
- Neutral lever allows for multiple chisel positions
- Optional dust extraction unit 402934



### Specifications

	Masonry	28mm
Capacity	Wood	32mm
	Steel	13mm
No load speed	0 - 1,100 (min-1)	
Impact rate	0 - 4,300 (min-1)	
Impact energy	2.9j	
Chuck type	Quick release SDS Plus / Quick release 13mm metal keyless chuck	
Weight	4.2kg (with BSL36A18 battery)	
Length	383mm	
Battery type	BSL36A18 : Li-ion MultiVolt (Battery A)	
Standard accessories	2 x BSL36A18 MultiVolt batteries, UC18YSL3 rapid charger, side handle, depth gauge and stackable case. Drill bit not included.	

Also Available: **DH36DPA(H4Z)**  
36V Brushless SDS Plus Rotary Hammer  
(without QR Chuck)



Naked: DH36DPC(H4Z)



4966376307982

## DH36DMA(HAZ) 36V Brushless SDS Max Rotary Hammer

Available Kit and Naked



4966376325252

- 8.5 joules high impact energy
- 2 mode: rotation + hammering and hammer only
- Electronic 4 mode speed adjustment
- Neutral lever allows for multiple chisel positions
- LVH (Low Vibration Handle)
- RFC (Reactive Force Control)



### Specifications

Capacity	Concrete - drill bit	40mm
	Concrete - core bit	105mm
No load speed	260 - 590 (min-1)	
Impact rate	1,420 - 2,860 (min-1)	
Impact energy	8.5j	
Chuck type	SDS Max	
Weight	7.9kg (with BSL36B18 battery)	
Length	484mm	
Battery type	BSL36B18 : Li-ion MultiVolt (Battery B)	
Standard accessories	2 x BSL36B18 MultiVolt batteries, UC18YSL3 rapid charger, side handle, depth stopper, grease pack and carry case. Drill bit not included.	



Naked: DH36DMA(H4Z)



9323624028740

**WH36DB(HRZ)** 36V Brushless Impact Driver

Available Kit and Naked



4966376321520

- Triple hammer anvil reduces vibration and “cam-out”
- IP56 dust and water resistant
- 4 step tightening mode selector
- Exceptional ergonomics

**Specifications**

	Bolt	M5 - M18
Capacity	High tension bolt	M5 - M14
	Screw	M4 - M10
Max. torque	210Nm	
No load speed	Soft mode	0 - 900 (min-1)
	Normal mode	0 - 2,900 (min-1)
	Power mode	0 - 2,900 (min-1)
	S mode (Self drilling)	0 - 2,900 (min-1)
Impact rate	Soft mode	0 - 2,000 (min-1)
	Normal mode	0 - 4,100 (min-1)
	Power mode	0 - 4,100 (min-1)
	S mode (Self drilling)	0 - 2,200 (min-1)
Weight	1.6kg (with BSL36A18 battery)	
Length	127mm	
Battery type	BSL36A18 : Li-ion MultiVolt (Battery A)	
Standard accessories	2 x BSL36A18 MultiVolt batteries, UC18YSL3 rapid charger, belt hook and stackable case	



Naked: WH36DB(H4Z)



4966376321513

**WR36DC(HRZ)** 36V Brushless 12.7mm (1/2") Impact Wrench

Available Kit and Naked



4966376333189

**NEW**

- 320Nm maximum tightening torque
- IP56 dust and water resistant
- 5 step tightening mode selector
- Exceptional ergonomics

**Specifications**

	Ordinary bolt M10 to M20	M12 - M30
Capacity	High-strength	M10 - M24
Tightening Torque		320Nm
No-load rotation speed	Wood mode	0 to 3,000 min <sup>-1</sup>
	High mode	0 to 2,800 min <sup>-1</sup>
	Medium mode	0 to 2,000 min <sup>-1</sup>
	Low mode	0 to 1,050 min <sup>-1</sup>
Impact Rate	Single mode <sup>72</sup>	0 to 2,800 min <sup>-1</sup>
	Wood mode	0 to 4,000 min <sup>-1</sup>
	High mode	0 to 3,800 min <sup>-1</sup>
	Medium mode	0 to 2,900 min <sup>-1</sup>
Weight	Low mode	0 to 1,350 min <sup>-1</sup>
	Single mode <sup>*</sup>	0 to 3,800 min <sup>-1</sup>
Weight	1.9kg (inc. battery)	
Dimensions (L x H)	145 x 244mm	
Battery type	BSL36A18 : Li-ion MultiVolt (Battery A)	
Standard accessories	2 x BSL36A18 MultiVolt batteries, UC18YSL3 rapid charger, belt hook and stackable case. Socket not included	



Naked: WR36DC(H4Z)



4966376333172

## WR36DB(HRZ) 36V Brushless High Torque 12.7mm (1/2") Impact Wrench

Available Kit and Naked



4966376323739

- 1,650Nm high torque performance
- IP56 dust and water resistant
- 4 step tightening mode selector
- Highly durable hammer case

### Specifications

Capacity	Bolt	M12 - M30
	High tension bolt	M10 - M24
Max. torque	Tightening	1,050Nm
	Nut busting	1,650Nm
Square drive	12.7mm (1/2")	
No load speed	High mode	0 - 1,500 (min-1)
	Medium mode	0 - 1,200 (min-1)
	Low2 mode	0 - 900 (min-1)
	Low1 mode	0 - 600 (min-1)
Impact rate	High mode	0 - 2,800 (min-1)
	Medium mode	0 - 2,300 (min-1)
	Low2 mode	0 - 1,800 (min-1)
	Low1 mode	0 - 1,200 (min-1)
Weight	3.7kg (with BSL36A18 battery)	
Length	221mm	
Battery type	BSL36A18 : Li-ion MultiVolt (Battery A)	
Standard accessories	2 x BSL36A18 MultiVolt batteries, UC18YSL3 rapid charger, belt hook and stackable case. Socket not included	



Naked: WR36DB(H4Z)



4966376323722

## WR36DA(HRZ) 36V Brushless High Torque 19mm (3/4") Impact Wrench

Available Kit and Naked



4966376323548

- 1,800Nm high torque performance
- IP56 dust and water resistant
- 4 step tightening mode selector
- Highly durable hammer case

### Specifications

Capacity	Bolt	M12 - M30
	High tension bolt	M10 - M24
Max. torque	Tightening	1,100Nm
	Nut busting	1,800Nm
Square drive	19mm (3/4")	
No load speed	High mode	0 - 1,500 (min-1)
	Medium mode	0 - 1,200 (min-1)
	Low2 mode	0 - 900(min-1)
	Low1 mode	0 - 600 (min-1)
Impact rate	High mode	0 - 2,900 (min-1)
	Medium mode	0 - 2,300 (min-1)
	Low2 mode	0 - 1,800 (min-1)
	Low1 mode	0 - 1,200 (min-1)
Weight	3.7kg (with BSL36A18 battery)	
Length	221mm	
Battery type	BSL36A18 : Li-ion MultiVolt (Battery A)	
Standard accessories	2 x BSL36A18 MultiVolt batteries, UC18YSL3 rapid charger, belt hook and stackable case. Socket not included	



Naked: WR36DA(H4Z)



4966376323531



**G3613DA(HRZ)** 36V Brushless 125mm Angle Grinder with Slide Switch

Available Kit and Naked



- Auto mode function
- Fast brake system stops the disc within 2 seconds
- Soft start, kickback reduction, restart protection
- Variable speed dial
- Compact grip circumference



Naked: G3613DA(H4Z)

**Specifications**

Wheel diameter	125mm	
Switch type	Slide	
No load speed	Auto mode	5,500 (min-1)
	Standard mode	3,000-9,500 (min-1)
Spindle thread	M14 x 2	
Weight	2.8kg (with BSL36A18 battery)	

Dimensions	Length	358mm
	Height	139mm
	Grip circumference	146mm
Battery type	BSL36A18 : Li-ion MultiVolt (Battery A)	
Standard accessories	2 x BSL36A18 MultiVolt batteries, UC18YSL3 rapid charger, side handle, grinding disc, wrench and stackable case	

**G3613DB(HRZ)** 36V Brushless 125mm Angle Grinder with Paddle Switch

Available Kit and Naked



- Auto mode function
- Fast brake system stops the disc within 2 seconds
- Soft start, kickback reduction, restart protection
- Variable speed dial
- Compact grip circumference



Naked: G3613DB(H4Z)

**Specifications**

Wheel diameter	125mm	
Switch type	Paddle	
No load speed	Auto mode	5,500 (min-1)
	Standard mode	3,000-9,500 (min-1)
Spindle thread	M14 x 2	
Weight	2.8kg (with BSL36A18 battery)	

Dimensions	Length	358mm
	Height	139mm
	Grip circumference	146mm
Battery type	BSL36A18 : Li-ion MultiVolt (Battery A)	
Standard accessories	2 x BSL36A18 MultiVolt batteries, UC18YSL3 rapid charger, side handle, grinding disc, wrench and stackable case	

**G3623DA(H4Z)** 36V Brushless 230mm Angle Grinder with Trigger (Deadman) Switch

Available Naked Only

**NEW**

- Auto mode function
- Fast brake system stops the disc within 2 seconds
- Soft start, kickback reduction, restart protection
- Compact grip circumference

**Specifications**

Wheel diameter	230mm	
Switch type	Trigger (Deadman)	
No load speed	Auto mode	3,200 (min-1)
	Standard mode	5,300 (min-1)
Spindle thread	M14 x 2	
Weight	4.9kg (with BSL36B18 battery)	

Dimensions	Length	531mm
	Height	162mm
	Grip circumference	148mm
Battery type	Compatible with all HiKOKI MultiVolt batteries	
Standard accessories	Wheel guard, wrench and side handle	

## VB3616DA(HGZ) 36V Brushless Rebar Cutter & Bender

Available Kit Only



4966376331765

**NEW**

- Reverse rotation mode for
- precision angle alignment
- 4 angle settings from 45° to 180°
- Brushless DC motor
- Replacement Cutter Set: 319706



### Specifications

Capacity	Rebar material yield strength 460 N/mm <sup>2</sup> (47kg/mm <sup>2</sup> ) max	
	Max rebar diameter 16mm	
No of Possible Rebars at a time	Cutting	10mm max 2
		12mm max 1
		16mm max 1
	Bending	10mm max 3
		12mm max 2
		16mm max 1
Bending Angle	0° to 180° (stepless)	

No -load speed	0 to 16min-1	
Speed	Cutting	2.6 sec
	Bending	3.8 sec
No. of operations per charge	Cutting	170 approx
	Bending	310 approx
Weight	18.9kg	
Dimensions (L x W x H)	510 x 230 x 241mm	
Standard accessories	2 x BSL36A18 MultiVolt batteries, UC18YSL3 rapid charger and case	

## C3610DRJ(H4Z) 36V Brushless 254mm Table Saw

Available Naked Only



4966376334490

**NEW**

- Equipped with adjustable rip fence (max extension 35") and support table
- Brushless motor
- Power source either MultiVolt battery or ET36A AC Adaptor (sold separately).
- Same cutting capacity as AC table saw



### Specifications

Motor Type	36V Brushless	
No load speed	5,000 (min-1)	
Motor Size	86mm x 40mm	
Blade Diameter	254mm	
Max Capacity	Cutting Depth (90°)	79mm
	Standard mode	57mm
	Rip fence ext. length (right)	889mm
	Rip fence ext. length (left)	559mm
	Width of dado	20mm

Main size table (Sq.in.)	633
Support Table	(Y)
Electric Brake function	(Y)
Soft Start	(Y)
Dimension (LxWxH) mm	915x765x375
Product Weight	29.5kg (ex. Bat)

# C3607DRA(H4Z) 36V Brushless 185mm Slide Compound Mitre Saw

Available Naked Only



NEW

- Twin belt drive for low noise and smooth cutting
- Motor head slides on fixed pipe to optimise use in narrow spaces
- Laser guide system for improved accuracy
- Twin LED light included



## Specifications

Maximum Cutting Capacity	0 Degree (Right Angle)	58 x 310mm
	Mitre Right / Left 45 Degree	58 x 218mm
	Bevel Left 45 Degree	39 x 310mm
	Bevel Right 45 Degree	16 x 310mm
Capacity	Mitre Angle: Left	0 - 45 degree
	Mitre Angle: Right	0 - 57 degree
	Bevel Angle: Left & Right	0 - 45 degree

No Load Speed	4,000 (min-1)
Blade Diameter	185mm
Weight (Inc Battery)	15.4kg
Dimension (LxWxH) mm	455 x 750 x 430mm
Battery Type	Compatible with HIKOKI MultiVolt batteries

# C3610DRA(HAZ) 36V Brushless 255mm Slide Compound Mitre Saw

Available Kit and Naked



- Lightweight for easy transport
- Laser line for accurate and easy cutting
- Soft start reduces recoil force at motor start up for user safety
- LED light included
- Positive mitre stops for quick and easy adjustment

## Specifications

Maximum Cutting Capacity	0 Degree (Right Angle)	89 x 292mm
	Mitre Right / Left 45 Degree	89 x 204mm
	Bevel Left 45 Degree	45 x 292mm
	Bevel Right 45 Degree	25 x 292mm
Capacity	Mitre Angle	0 - 48 Degree (Left & Right)
	Bevel Angle	0 - 55 Degree (Left) & 0 - 60 Degree (Right)
	Positive Mitre Stop	0, 15, 22.5, 31.6, 45 Degree
No Load Speed	4,000 (min-1)	
Blade Diameter	255mm	
Blade Bore	25.4mm	
Weight (Inc Battery)	20.6kg	
Dimension (LxWxH) mm	455 x 750 x 430	
Standard Accessories	<ul style="list-style-type: none"><li>• TCT Saw Blade 255mm</li><li>• Vice Assembly</li><li>• 5mm Screws</li><li>• Dust Bag</li><li>• Support Rods</li><li>• 13mm Wrench</li></ul>	



Naked: C3610DRA(H4Z)



## CJ36DA(H2Z)

### 36V Brushless Jig Saw with Top Handle

Available Naked Only



4966376331048

**NEW**

- Auto mode
- Tool-less blade changing system
- 4-stage orbital operation

#### Specifications

Cutting Capacity	Wood	160mm
	Mild Steel	10mm
	Stainless Steel	3.2mm
No load speed	Standard Mode	800 - 3,500 min-1
	Auto Mode	1,400 - 3,500 min-1
Stroke		26mm

Minimum Cutting Radius	25mm
Maximum Cutting Radius	45° (right and left)
Type of Switch	Trigger (with ON-OFF lock)
LED Light	White LED
Weight	2.7kg (inc. battery)
Dimensions (L x H)	277 x 206mm



## CJ36DB(H2Z)

### 36V Brushless Jig Saw with Barrel Handle

Available Naked Only



4966376331147

**NEW**

- Auto mode
- Tool-less blade changing system
- 4-stage orbital operation

#### Specifications

Cutting Capacity	Wood	160mm
	Mild Steel	10mm
	Stainless Steel	3.2mm
No load speed	Standard Mode	800 - 3,500 min-1
	Auto Mode	1,400 - 3,500 min-1
Stroke		26mm

Minimum Cutting Radius	25mm
Maximum Cutting Radius	45° (right and left)
Type of Switch	Slide switch
LED Light	White LED
Weight	2.7kg (inc. battery)
Dimensions (L x H)	299 x 175mm



## CR36DA(HGZ) 36V Brushless Reciprocating Saw

Available Kit and Naked



4966376324835

- 4 step speed selection switch
- Orbital & swing cutting mechanism
- Twin rotation counterweight system
- Bright LED
- Large pivot hook



Naked: CR36DA(H4Z)



4966376324828

#### Specifications

Capacity	Steel pipe	130mm
	Wood	300mm
	Steel plate	19mm
No load speed	0-1,700 / 0-2,000 / 0-2,500 / 0-3,000spm	
Stroke length	32mm	

Weight	4.8kg including BSL36A18 battery
Length	457mm
Battery type	BSL36A18: Li-ion MultiVolt (Battery A)
Standard accessories	2 x BSL36A18 MultiVolt batteries, UC18YSL3 rapid charger, Blade and moulded carry case



## C3607DA(HRZ) 36V Brushless 185mm Circular Saw

Available Kit and Naked



4966376313594

- Electric brake
- Silent mode reduces noise and power consumption
- Compact and lightweight
- Kickback mitigation



### Specifications

Capacity	Max. of depth cut: 90°	62mm
	Max. of depth cut: 45°	47.5mm
No load speed	Power mode	4,300 (min-1)
	Silent mode	2,000 (min-1)
Blade diameter	185mm	
Angle cutting	-5° - 45°	
Weight	4.1kg (with BSL36A18 battery)	
	Length	318mm
Dimensions	Width	204mm
	Height	267mm
Battery type	BSL36A18 : Li-ion MultiVolt (Battery A)	
Standard accessories	2 x BSL36A18 MultiVolt batteries, UC18YSL3 rapid charger, blade, guide and stackable case	



Naked: C3607DA(H4Z)



9323624028788

## RP3608DA(H4Z) 36V Brushless Cleaner

Available Naked Only



4966376324644

- Wet & Dry applications
- Equivalent suction power to AC tool
- Can still operate with 1 battery only
- Air blow cleaning system allows for consistent high suction power
- Brushless motor
- Standard accessories: Polyethylene bag (10pcs), crevice nozzle for fluid & pipe assembly kit

### Specifications

Suction Capacity	Solid	8L
	Liquid	6L
Input Power	36V	
Maximum Air Flow	3.5 m3/min	
Hose (ID x Length)	38 x 1.5m	
Weight	10.4kg	
	Length	331mm
Dimensions (L x H)	Width	382mm
	Height	369mm
Battery Type (sold separately)	Compatible with HiKOKI MultiVolt batteries	
Standard Accessories	Polyethylene bag (10 pcs), crevice nozzle, nozzle for fluid & pipe assembly kit	



## CG36DA(H4Z) 36V Cordless Trimmer

Available Naked Only




4966376331659

NEW

- Longer run time per charge
- Brake mechanism stops the rotation of the head
- Coreless disc motor improves motor output, minimises heat and noise

\*1: Time will vary depending on grass type, temperature, battery condition. This is a guide only.

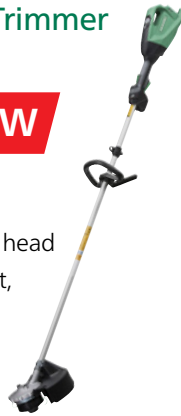

### Specifications

Motor	Disc
Battery Voltage	DC 36V (MultiVolt type)
Cutting capacity (diameter)	310mm
Cutting tool	Nylon head
No-load speed	5,800 to 7,000 min-1
Speed type	Variable dial
Run Time per charge*1	18min (high), 42min (normal) with BSL36A18
Main pipe	Single
No-load vibration level	4.0m/s <sup>2</sup>
No-load noise level	72dB (A)
Charging Time	32mins
Dimensions (L x H x W)	1,885 x 630 x 555mm
Weight	5.8kg (inc. battery)

## CH3656DA(H4Z)

### 36V Cordless Hedge Trimmer

Available Naked Only



4966376331666

NEW

- Longer run time per charge due to high efficiency brushless motor
- Uses the new MultiVolt battery which can be switched with 18V and 36V automatically
- Triple edge blade ensures a fine cut



### Specifications

Battery Voltage	DC 36V (MultiVolt type)
Blade length	560mm
No-load vibration level	4.3m/s <sup>2</sup>
No-load noise level	72dB (A)
Number of strokes	1,000 to 1,500 min-1
Speed control	4 stage (button type)
Carbon brush	Built-in
Blade assembly	Triple-edged x 2
Charging Time	32mins
Run Time	62.5 to 105min (depending on operation)
Dimensions (L x H x W)	1088 x 176 x 239mm
Weight	4.1kg (inc. battery)

## CS3630DA(H4Z) 36V Cordless Chain Saw

Available Naked Only



4966376331673

NEW

- Longer run time per charge due to high efficiency brushless motor
- Uses the new MultiVolt battery which can be switched with 18V and 36V automatically
- Triple edge blade ensures a fine cut



### Specifications

Battery Voltage	DC 36V (MultiVolt type)
Guide bar length	300mm
Chain speed	8.3m/s
Type of chain	91PX 45E (Oregon)
Cut per charge*1	190 cuts
Chain adjuster	Toolless
Vibration level under load	5.0m/s <sup>2</sup>
Noise level under load	87dB (A)
Carbon brush	Built-in
Spike	Steel
Charging Time	32mins
Dimensions (L x H x W)	599 x 214 x 256mm
Weight	4.3kg (inc. battery)

\*1: When cutting 50mm x 50mm cedar timber

## RB36DA(H4Z) 36V Brushless Blower

Available Naked Only



4966376331680

NEW

- Powerful air volume
- 4 mode switch and turbo mode
- Compact and well-balanced



### Specifications

Speed (min-1)	Mode 1	0 - 14,000
	Mode 2	0 - 16,500
	Mode 3	0 - 18,500
	Mode 4	0 - 20,500
	Turbo Mode	0 - 24,000

Air Volume (m <sup>3</sup> /hr)	Mode 1	0 - 460
	Mode 2	0 - 560
	Mode 3	0 - 630
	Mode 4	0 - 680
	Turbo Mode	0 - 800
Air Velocity (m/s)	Mode 1	0 - 30
	Mode 2	0 - 36
	Mode 3	0 - 40
	Mode 4	0 - 45
	Turbo Mode	0 - 53
Weight	3.5kg (with BSL36A18 battery and round nozzle)	
Dimensions (L x W x H)	318 x 204 x 267mm	
Battery type (sold separately)	Compatible with HiKOKI MultiVolt batteries	
Standard accessories	Round nozzle	

## KC18DBDL(HRZ) 2 Piece 18V MultiVolt Brushless Combination Pack



9323624029297

- DV18DBL2 Brushless Impact (Hammer) Driver Drill
- WH18DBDL2 Brushless Impact Driver
- 2 x MultiVolt Battery (A) BSL36A18
- 1 x Rapid Charger UC18YSL3
- Stackable Case



## KC36DBDL(HRZ) 2 Piece 36V MultiVolt Brushless Combination Pack



9323624028672

- DV36DA Brushless Impact (Hammer) Driver Drill
- WH36DB Brushless Impact Driver
- 2 x MultiVolt Battery (A) BSL36A18
- 1 x Rapid Charger UC18YSL3
- Stackable Carry Case





## KC18DPL(HRZ) 2 Piece 18V MultiVolt Brushless Combination Pack



9323624029303

- DV18DBL2 Brushless Impact (Hammer) Driver Drill
- WR18DBDL2 Brushless 12.7mm Impact Wrench
- 2 x MultiVolt Battery (A) BSL36A18
- 1 x Rapid Charger UC18YSL3
- Stackable Case



## KC36DPL2(HRZ) 2 Piece 36V MultiVolt Brushless Combination Pack



9377778047805

- DV36DA Brushless Impact (Hammer) Driver Drill
- WR36DC Brushless 12.7mm Impact Wrench
- 2 x MultiVolt Battery (A) BSL36A18
- 1 x Rapid Charger UC18YSL3
- Stackable Carry Case



## KC18DDBL(HRZ) 3 Piece 18V MultiVolt Brushless Combination Pack



9323624029280

- DV18DBL2 Brushless Impact (Hammer) Driver Drill
- WH18DBDL2 Brushless Impact Driver
- G18DBL Brushless 125mm Angle Grinder with Slide Switch
- 2 x MultiVolt Battery (A) BSL36A18
- 1 x Rapid Charger UC18YSL3
- Large Site Bag - 402094



## KC36DDBL(HRZ) 3 Piece 36V MultiVolt Brushless Combination Pack



9323624028689

- DV36DA Brushless Impact (Hammer) Driver Drill
- WH36DB Brushless Impact Driver
- G3613DB Brushless Angle Grinder with Paddle Switch
- 2 x MultiVolt Battery (A) BSL36A18
- 1 x Rapid Charger UC18YSL3
- 2 x Stackable Carry Cases





## KC36DRBL2(HRZ) 3 Piece 36V MultiVolt Brushless Combination Pack



9323624028702

- DV36DA Brushless Impact (Hammer) Driver Drill
- WR36DC Brushless 12.7mm Impact Wrench
- G3613DB Brushless Angle Grinder with Paddle Switch
- 2 x MultiVolt Battery (A) BSL36A18
- 1 x Rapid Charger UC18YSL3
- 2 x Stackable Carry Cases



## KC36D5P(HRZ) 5 Piece 36V MultiVolt Brushless Combination Pack



9323624029228

- DV36DA Brushless Impact (Hammer) Driver Drill
- WH36DB Brushless IP56 Triple Hammer Impact Driver
- G3613DB Brushless 125mm Angle Grinder With Paddle Switch
- C3607DA Brushless 165mm Circular Saw
- CR36DA Brushless Recipricating Saw
- 2 X Multivolt Battery (A) BSL36A18
- Rapid Charger UC18YSL3(H0Z)
- Premium Site Bag





## KC18D6P(HRZ) 6 Piece 18V MultiVolt Brushless Combination Pack



9323624029242

- DV18DBL2 Brushless Impact (Hammer) Driver Drill
- WH18DBDL2 Brushless Impact Driver
- G18DBL Brushless 125mm Angle Grinder with Slide Switch
- DH18DBL Brushless SDS-Plus Rotary Hammer
- CR18DBL Brushless Reciprocating Saw
- C18DBAL Brushless 165mm Circular Saw
- 2 x MultiVolt Battery (A) BSL36A18
- 1 x Rapid Charger UC18YSL3
- Large Site Bag - 402094



## KC18D8P(HRZ) 8 Piece 18V MultiVolt Brushless Combination Pack



9377778047799

- DV18DBL2 18V Brushless Impact (Hammer) Driver Drill
- WH18DBDL2 18V Brushless Impact Driver
- G18DBL 18V Brushless 125mm Angle Grinder with Slide Switch
- DH18DBL 18V Brushless SDS-Plus Rotary Hammer
- CR18DBL 18V Brushless Reciprocating Saw
- C18DBAL 18V 165mm Brushless Circular Saw
- UB18DJL 18V Worklight & Torch
- RB18DSL 18V Blower & Vacuum Pack
- 3 x MultiVolt Battery (A) BSL36A18
- 1 x Rapid Charger UC18YSL3
- Large Site Bag



## 18VFRAMERCOMBO1(HRZ) 2 Piece 18V MultiVolt Brushless Combination Pack



9323624028535

- NR1890DBCL Brushless 90mm Strip Nailer
- NT1865DBAL Brushless 65mm DA Finish Nailer
- 2 x MultiVolt Battery (A) BSL36A18
- 1 x Rapid Charger UC18YSL3
- 2 x Stackable Carry Cases



## 18VFRAMERCOMBO2(HRZ) 2 Piece 18V MultiVolt Brushless Combination Pack



9323624028542

- NR1890DBCL Brushless 90mm Strip Nailer
- NT1865DBSL Brushless 65mm C Finish Nailer
- 2 x MultiVolt Battery (A) BSL36A18
- 1 x Rapid Charger UC18YSL3
- 2 x Stackable Carry Cases



**DN18DSL(H4Z) 18V 10mm Angle Drill**

Available Naked Only



- All metal gear case for extra strength
- Variable speed large paddle switch with brake
- Narrow head height for greater access
- 22 stage adjustable clutch

**Specifications**

Capacity	Wood	28mm
	Mild steel	10mm
No load speed	0 - 1,800 (min-1)	
Chuck type	10mm keyless	
Head height	88mm	
Weight	1.7kg (with BSL1830C battery)	

Length	314mm (with BSL1830C battery)
Battery type (sold separately)	Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries
Standard accessories	Side handle and steel belt hook. Batteries and charger available separately

**DV18DJL(HCZ) 18V Impact (Hammer) Driver Drill**

Available Kit only



- 2 speed gearbox with all metal gears
- Compact and lightweight
- 13mm keyless chuck
- 22 stage adjustable clutch

**Specifications**

Capacity	Masonry	13mm
	Wood	38mm
	Steel	13mm
No load speed	0 - 350 / 0 - 1,400 (min-1)	
No load impact rate	0 - 4,900 / 0 - 19,600 (min-1)	
Max. torque	Hard	23Nm
	Soft	55Nm
Weight	1.7kg (with BSL1815 battery)	
Length	220mm	
Battery type	BSL1815 1.5Ah li-ion battery	
Standard accessories	2 x BSL1815 batteries, UC18YSL3 rapid charger and stackable case	



## DV18DBL2(H4Z) 18V Brushless Impact (Hammer) Driver Drill

Available Naked Only



4966376312214

- RFC (Reactive Force Control)
- 2 speed gearbox with all metal gears
- 13mm all metal keyless chuck
- 22 stage adjustable clutch



### Specifications

Capacity	Masonry	16mm
	Wood	76mm
	Steel	13mm
No load speed	0 - 500 / 0 - 2,100 (min-1)	
No load impact rate	0 - 31,500 (min-1)	
Max. torque	Hard	136Nm
	Soft	62Nm
Weight	2.5kg (with BSL36A18 battery)	
Length	204mm	
Battery type (sold separately)	Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries	
Standard accessories	Side handle, driver bit and steel belt hook. Batteries and charger available separately	

## DS18DBL2(H4Z) 18V Brushless Driver Drill

Available Naked Only



4966376310197

- RFC (Reactive Force Control)
- 2 speed gearbox with all metal gears
- 13mm all metal keyless chuck
- 22 stage adjustable clutch



### Specifications

Capacity	Wood	76mm
	Steel	13mm
No load speed	0 - 500 / 0 - 2,100 (min-1)	
Max. torque	Hard	136Nm
	Soft	62Nm
Weight	2.5kg (with BSL36A18 battery)	
Length	204mm	
Battery type (sold separately)	Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries	
Standard accessories	Side handle, driver bit and steel belt hook. Batteries and charger available separately	

**DH18DBL(H4Z) 18V Brushless SDS-Plus Rotary Hammer**

Available Naked Only



- 2.6 joules high impact energy
- 3 mode: rotation + hammering, hammer only and rotation only
- Neutral lever allows for multiple chisel positions

**Specifications**

	Masonry	26mm
Capacity	Wood	27mm
	Steel	13mm
No load speed	0 - 1,050 (min-1)	
Impact rate	0 - 3,950 (min-1)	
Impact energy	2.6J	
Chuck type	SDS Plus	



Weight	3.7kg (with BSL36A18 battery)
Length	351mm
Battery type (sold separately)	Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries
Standard accessories	Side handle and depth gauge. Batteries and charger available separately

**402933 Dust Extractor to suit DH18DBL**

Available Naked Only

**402934 Dust Extractor to suit DH36DPC**

Available Naked Only



- HEPA filter collects 99.97% of all particles greater than 0.3um
- Brush type cap is highly durable and efficient
- Built in motor which works in conjunction with the rotary hammer

**Specifications**

Flow rate	0.35 (m3/min)
Operating stroke	100mm
Nozzle seal	Rubber
Sealing cap for drill bit	Brush
Dust box capacity	300ml
Weight	1.8kg

**DH18DSL(H4Z) 18V SDS-plus Rotary Hammer**

Available Naked Only



- Power and save mode speed selection
- Idle striking prevention mechanism protects the tool, bit and workpiece.
- Externally accessible brushes facilitating easy service

**Specifications**

	Masonry	16mm
Capacity	Wood	18mm
	Steel	13mm
No load speed	0 - 750 / 0 - 1,500 (min-1)	
Impact rate	0 - 3,100 / 0 - 6,200 (min-1)	
Chuck type	SDS Plus	



Weight	2.2kg (with BSL36A18 battery)
Length	276mm
Battery type (sold separately)	Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries
Standard accessories	Side handle and depth gauge. Batteries and charger available separately

## WH18DBDL2(H4Z) 18V Brushless Impact Driver

Available Naked Only



4966376320752

- IP56 dust and water resistant
- Triple hammer anvil reduces vibration and "cam-out"
- 4 step tightening mode selector
- Exceptional ergonomics with well balanced weight distribution

### Specifications

	Bolt	M5 - M18
Capacity	High tension bolt	M5 - M14
	Screw	M4 - M10
Max. torque	210Nm	
No load speed	Soft mode	0 - 900 (min-1)
	Normal mode	0 - 2,900 (min-1)
	Power mode	0 - 2,900 (min-1)
	S mode (Self drilling)	0 - 2,900 (min-1)
Impact rate	Soft mode	0 - 1,900 (min-1)
	Normal mode	0 - 4,000 (min-1)
	Power mode	0 - 4,000 (min-1)
	S mode(Self drilling)	0 - 2,100 (min-1)
Weight	1.6kg (with BSL36A18 battery)	
Length	127mm	



Battery type (sold separately)	Compatible with all Hitachi and HIKOKI MultiVolt and 18V slide batteries
Standard accessories	Driver bit and steel belt hook. Batteries and charger available separately

## WH18DSDL(H4Z) 18V Impact Driver

Available Naked Only



4966376321469

- Power and save mode speed selection
- Aluminium cover for high rigidity
- Externally accessible brushes

### Specifications

	Bolt	M6 - M14
Capacity	High tension bolt	M6 - M12
	Screw	M4 - M10
Max. torque	176Nm	
No load speed	0 - 2,000 / 2,600 (min-1)	
Impact rate	0 - 2,400 / 3,200 (min-1)	
Drive	6.35mm hex drive	
Weight	1.7kg (with BSL36A18 battery)	
Length	162mm	
Battery type (sold separately)	Compatible with all Hitachi and HIKOKI MultiVolt and 18V slide batteries	
Standard accessories	Driver bit and steel belt hook. Batteries and charger available separately	





# Faster and Easier.

HiKOKI high performance power tools are designed to make your job easier and get it done faster so you can spend less time working and more time living.



## WF18DSL(H4Z) 18V Automatic Screw Driver

Available Naked Only



- Quick adjustment button allows fast adjustment to suit screw length
- Silent clutch for low noise and shock free clutching
- Belt guide on slider case for accurate feeding

Specifications		
Capacity	Small screw	4mm
Screw length	25 - 41mm	
No load speed	4,200 (min-1)	
Drive	6.35mm hex drive	
Weight	2.1kg (with BSL36A18 battery)	
Length	399mm	
Battery type (sold separately)	Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries	
Standard accessories	3 x No.2 phillips driver bits, 3 x surface protectors and steel belt hook. Batteries and charger available separately	

**752376:** 136.4mm No.2 Phillips driver bit twin pack available separately.  
**752379:** 136.4mm No.2 Pozi driver bit twin pack available separately.

## WR18DBDL2(HRZ) 18V Brushless 12.7mm Impact Wrench

Available Kit and Naked



9323624029020

- IP56 dust and water resistant
- 4 step tightening mode selector
- Smooth socket changes with friction ring anvil
- Exceptional ergonomics with well balanced weight distribution

### Specifications

Capacity	Bolt	M10 - M20
	High tension bolt	M10 - M16
Max. torque	Tightening	305Nm
Square Drive	12.7mm (½")	
No load speed	High mode	0 - 2,700 (min-1)
	Medium mode	0 - 2,000 (min-1)
	Low mode	0 - 1,000 (min-1)
	Single mode	0 - 2,700 (min-1)
Full load impact rate	0 - 3,600 (min-1)	
Weight	1.8kg (with BSL36A18 battery)	
Length	145mm	
Battery type	BSL36A18 : Li-ion MultiVolt (Battery A)	
Standard accessories	2 x BSL36A18 MultiVolt batteries, UC18YSL3 rapid charger, belt hook and stackable case. Socket not included	



Naked: WR18DBDL2(H4Z)



4966376322633

## WR18DSDL(H4Z) 18V 12.7mm Impact Wrench

Available Naked Only



4966376322893

- Power and save mode speed selection
- Aluminium cover for high rigidity
- Externally accessible brushes



### Specifications

Capacity	Bolt	M10 - M18
	High tension bolt	M8 - M14
Max. torque	Tightening	271Nm
Square drive	12.7mm (½")	
No load speed	0 - 2,000 / 2,600 (min-1)	
Impact rate	0 - 2,400 / 3,200 (min-1)	
Weight	1.7kg (with BSL36A18 battery)	
Length	173mm	
Battery type (sold separately)	Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries	
Standard accessories	Steel belt hook. Socket not included. Batteries and charger available separately	

## WR18DSHL(H4Z) 18V 12.7mm High Torque Impact Wrench

Available Naked Only



4966376323210

- High torque performance
- Forward & reverse tumbler switch
- Aluminium cover for high rigidity
- Externally accessible brushes



### Specifications

Capacity	Bolt	M12 - M22
	High tension bolt	M12 - M16
Max. torque	Tightening	486Nm
Square drive	12.7mm (½")	
No load speed	0 - 1,500 (min-1)	
Impact rate	0 - 2,000 (min-1)	
Weight	3.4kg (with BSL36A18 battery)	
Length	264mm	
Battery type (sold separately)	Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries	
Standard accessories	Steel belt hook. Socket not included. Batteries and charger available separately	

**NT1850DBSL(H4Z) 18V Brushless 50mm C1 Brad Nailer**

Available Naked Only



- Lower running cost than gas nailers
- Unique air drive system
- More nails driven per charge; approximately 2,800
- Reload window is incorporated within the magazine

**Specifications**

Driving system	Unique Air Drive	
Nail length	16 - 50mm	
Driving speed	3 nails/sec (intermittent)	
Loading capacity	100 nails	
Firing mode	Full sequential / Contact (selectable)	
Fastening series	18 gauge C1 series Brad nails	
Weight	3.6kg (with BSL36A18 battery)	
	Length	310mm
	Height	323mm
Dimensions	Width	104mm
Battery type (sold separately)	Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries	
Standard accessories	Hook, nose cap, safety glasses and stackable case. Batteries and charger available separately	



**NT1865DBSL(HRZ) 18V Brushless 65mm C Finish Nailer**

Available Kit and Naked



- Lower running cost than gas nailers
- Unique air drive system
- More nails driven per charge; approximately 2,650
- Dry fire lockout

**Specifications**

Driving system	Unique Air Drive	
Nail length	25 - 65mm	
Driving speed	3 nails/sec (intermittent)	
Loading capacity	100 nails	
Firing mode	Full sequential / Contact (selectable)	
Fastening series	16 gauge C series finish nails	
Weight	3.6kg (with BSL36A18 battery)	
	Length	310mm
	Height	323mm
Dimensions	Width	104mm
Battery type	BSL36A18: Li-ion MultiVolt (Battery A)	
Standard accessories	2 x BSL36A18 MultiVolt batteries, UC18YSL3 rapid charger, hook, nose cap, safety glasses and stackable case	



Naked: NT1865DBSL(H4Z)





## NT1865DBAL(HRZ) 18V Brushless 65mm DA Finish Nailer

Available Kit and Naked



9323624029037

- Lower running cost than gas nailers
- Unique air drive system
- More nails driven per charge; approximately 2,250
- Dry fire lockout

### Specifications

Driving system	Unique Air Drive
Nail length	32 - 65mm
Driving speed	3 nails/sec (intermittent)
Loading capacity	100 nails
Firing mode	Full sequential / Contact (selectable)
Fastening Series	15 gauge DA series finish nails
Weight	3.8kg (with BSL36A18 battery)
Dimensions	Length310mm
	Height344mm
	Width104mm
Battery type	BSL36A18 : Li-ion MultiVolt (Battery A)
Standard accessories	2 x BSL36A18 MultiVolt batteries, UC18YSL3 rapid charger, hook, nose cap, safety glasses and stackable case



Naked: NT1865DBAL(H4Z)



4966376316199

## NR1890DBCL(HRZ) 18V Brushless 90mm 34° Strip (Framing) Nailer

Available Kit and Naked



9323624029051

- Lower running cost than gas nailers
- Unique air drive system
- Dual function trigger for sequential and contact mode with operation control panel
- Dry fire lockout

### Specifications

Driving system	Unique Air Drive	
Nail length	50 - 90mm	
Driving speed	3 nails/sec (intermittent)	
Loading capacity	47 nails	
Firing mode	Full sequential / Contact (selectable)	
Fastening Series	Clipped head strip nails	
Weight	4.8kg (with BSL36A18 battery)	
Dimensions	Length	309mm
	Height	342mm
	Width	127mm
Battery type	BSL36A18 : Li-ion MultiVolt (Battery A)	
Standard accessories	2 x BSL36A18 MultiVolt batteries, UC18YSL3 rapid charger, hook, 2 x hex wrenches, safety glasses and stackable case	



Naked: NR1890DBCL(H4Z)



4966376315963

**CN18DSL(H4Z) 18V 1.6mm Nibbler**

Available Naked Only



4966376304448

- 180 degree 3 stop die holder
- Safety anti-start override circuit
- Punch and die have 300m steel service life\*

**Specifications**

Cutting capacity	Mild steel plate (400N/mm <sup>2</sup> )	1.6mm
	Stainless steel plate (400N/mm <sup>2</sup> )	1.2mm
Minimum cutting radius	40mm	
Cutting speed	1.8 (m/min)*	
Number of strokes at no load	2,500 (min-1)	

Weight	2.1kg (with BSL36A18 battery)
Length	295mm
Battery type (sold separately)	Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries
Standard accessories	Optional batteries and charger available separately

\*When cutting 1.6mm thick mild steel

**CE18DSL(H4Z) 18V 1.6mm Shear**

Available Naked Only



4966376302444

- Unique design allows for fast cutting and tight cutting radius
- Metal safety guard
- Safety anti-start override circuit
- Easily replaceable cutter blades with 8 cutting edges

**Specifications**

Cutting capacity	Mild steel plate (400N/mm <sup>2</sup> )	1.6mm
	Stainless steel plate (400N/mm <sup>2</sup> )	1.2mm
Minimum cutting radius	25mm	
Cutting speed	5.0 (m/min)*	
Number of strokes at no load	5,300 (min-1)	

Weight	2.2kg (with BSL36A18 battery)
Length	295mm
Battery type (sold separately)	Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries
Standard accessories	Optional batteries and charger available separately

\*When cutting 1.6mm thick mild steel

## G18DBBAL(H5Z) 18V Brushless 125mm Angle Grinder with Paddle Switch

Available Naked Only



4966376314003

- Auto Mode function
- Fast brake system stops the disc within 2 seconds
- Soft start, kickback reduction, restart protection
- Compact grip circumference

### Specifications

Wheel diameter	125mm	
Switch type	Paddle	
No load speed	Auto mode	5,500 (min-1)
	Standard mode	9,000 (min-1)
Spindle thread	M14 x 2	
Weight	2.7kg (with BSL36A18 battery)	



Dimensions	Length	326mm
	Height	138mm
	Grip circumference	152mm
Battery type (sold separately)	Compatible with all Hitachi and HIKOKI MultiVolt and 18V batteries	
Standard accessories	Side handle, grinding disc and wrench. Batteries and charger available separately	

## G18DBL(H5Z) 18V Brushless 125mm Angle Grinder with Slide Switch

Available Naked Only



4966376314201

- Auto Mode function
- Soft start, kickback reduction, restart protection
- Compact grip circumference

### Specifications

Wheel diameter	125mm	
Switch type	Slide	
No load speed	Auto mode	5,500 (min-1)
	Standard mode	9,000 (min-1)
Spindle thread	M14 x 2	
Weight	2.4kg (with BSL36A18 battery)	



Dimensions	Length	326mm
	Height	138mm
	Grip circumference	152mm
Battery type (sold separately)	Compatible with all Hitachi and HIKOKI MultiVolt and 18V slide batteries	
Standard accessories	Side handle, grinding disc and wrench. Batteries and charger available separately	

## G18DSL(H5Z) 18V 125mm Angle Grinder with Slide Switch

Available Naked Only



4966376314607

- Aluminium cover for high rigidity
- Safety anti-start override circuit
- Externally accessible brushes

### Specifications

Wheel diameter	125mm	
Switch type	Slide	
No load speed	9,100 (min-1)	
Spindle thread	M14 x 2	
Weight	1.8kg (with BSL36A18 battery)	
Length	293mm	



Battery type (sold separately)	Compatible with all Hitachi and HIKOKI MultiVolt and 18V slide batteries	
Standard accessories	Side handle, grinding disc and wrench. Batteries and charger available separately	



(H4Z) 18V Automatic Hammer

Available Naked Only



- Designed for driving nails in hard to reach places
- Compact head
- LED



Specifications

Nail details	Length	Min 25mm
		Max 90mm
	Head diameter	Min 3.9mm
		Max 8.8mm
	Shank diameter	min 1.7mm max 4.2mm

Impact rate	4,000min-1
Driving speed	1.5 seconds
Drive height	17mm
Head height	113mm
Battery type (sold separately)	Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries
Standard accessories	Batteries and charger available separately

CR18DBL(H4Z) 18V Brushless Reciprocating Saw

Available Naked Only



- Auto Mode function
- Electronic control panel to select between low, medium, high and auto modes
- Slimmer front and shock absorbing handle for user comfort
- Blade can be mounted in either upward or downward direction



Specifications

Capacity	Steel pipe	130mm
	Wood	120mm
	Steel plate	19mm
No load speed	0 - 1,600 / 2,300 / 2,500 (min-1)	
Stroke length	32mm	
Weight	3.4kg (with BSL36A18 battery)	
Length	435mm	
Battery type (sold separately)	Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries	
Standard accessory	Cutting blade. Batteries and charger available separately	

## C18DBL(H4Z) 18V 125mm Brushless Circular Saw

Available Naked Only



4966376301782

- Electric brake
- Rotation speed change over function: Power mode / Silent mode
- Centre balance technology offers superior manoeuvrability
- Compact and lightweight

### Specifications

Capacity	Max. of depth cut: 90°	47mm
	Max. of depth cut: 45°	30mm
No load speed	Power mode	5,000 (min-1)
	Silent mode	3,000 (min-1)
Blade diameter	125mm	
Angle cutting	0° - 45°	
Weight	2.5kg (with BSL36A18 battery)	
Dimensions	Length	280mm
	Width	168mm
	Height	237mm
Battery type (sold separately)	Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries	
Standard accessories	Blade and wrench. Batteries and charger available separately	



## C18DBAL(H4Z) 18V 165mm Brushless Circular Saw

Available Naked Only



4966376301683

- Electric brake
- Rotation speed change over function: Power mode / Silent mode
- Centre balance technology offers superior manoeuvrability
- Compact and lightweight

### Specifications

Capacity	Max. of depth cut: 90°	66mm
	Max. of depth cut: 45°	45mm
No load speed	Power mode	4,100 (min-1)
	Silent mode	2,500 (min-1)
Blade diameter	165mm	
Angle cutting	-5° - 45°	
Weight	3.2kg (with BSL36A18 battery)	
Dimensions	Length	294mm
	Width	188mm
	Height	255mm
Battery type (sold separately)	Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries	
Standard accessories	Blade and wrench. Batteries and charger available separately	



**CB18DBL(H4Z) 18V 83mm Brushless Band Saw**

Available Naked Only



4966376302345

- Auto Mode function
- Soft start function
- High speed cutting with a cleaner finish

**Specifications**

Capacity	Round pipe (external diameter)	83mm
	Square pipe (WxH)	80 x 80mm
	Standard mode	80 - 195 (m/min)
Cutting speed	Auto mode (without load)	120 - 195 (m/min)
	Blade size	900 x 12.5 x 0.5mm
Weight		3.6kg (with BSL36A18 battery)
	Length	413mm
	Width	173mm
Dimensions	Height	266mm



Battery type (sold separately)	Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries
Standard accessories	1 x 18TPI bi-metal blade, side handle and wrench. Batteries and charger available separately

**Blade Selection Guide**

Thickness	18TPI	14TPI
Under 3mm	✓	X
3mm to 6mm	✓	✓
Over 6mm	X	✓

**C18DSL(H4Z) 18V 165mm Circular Saw**

Available Naked Only



4966376302048

- Electric brake
- Magnesium saw cover for high rigidity
- Safety switch lever and light switch are integrated
- 90° fine adjustment screw
- Ergonomic soft grip handle

**Specifications**

Capacity	Max. of depth cut: 90°	57mm
	Max. of depth cut: 45°	40mm
No load speed	3,400 (min-1)	
Blade diameter	165mm	
Angle cutting	0° - 45°	



Weight	3.2kg (with BSL36A18 battery)
Length	365mm
Battery type (sold separately)	Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries
Standard accessories	Blade, wrench and parallel guide. Batteries and charger available separately

**CJ18DSL(H4Z) 18V Jig Saw**

Available Naked Only



4966376303915

- 4-stage orbital action
- Alloy base
- Powerful dust blowing mechanism

**Specifications**

Capacity	Wood	135mm
	Steel	10mm
No load speed	0 - 2,400 (min-1)	
Stroke length	26mm	
Blade type	Standard bayonet	
Angle cutting	0° - 45° left and right	
Weight	2.4kg (with BSL36A18 battery)	



Length	277mm
Battery type (sold separately)	Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries
Standard accessories	Blade, splinter guard and chip cover. Batteries and charger available separately



## P18DSL(H4Z) 18V 82mm Planer

Available Naked Only



- Heavy-duty aluminium end bracket
- Rear stand for added user safety and blade protection
- Ergonomic slim grip angled handle
- Optional dust adaptor



### Specifications

Cutting width	82mm	
Max. cutting depth	2.0mm	
Max. rebating depth	9.0mm	
No load speed	16,000 (min-1)	
Weight	3.3kg (with BSL36A18 battery)	
Dimensions	Length	332mm
	Width	166mm
	Height	160mm
Battery type (sold separately)	Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries	
Standard accessories	4 x 82mm reversible TCT blades. Batteries and charger available separately	

## CV18DBL(H4Z) 18V Brushless Multi Tool

Available Naked Only



- Auto Mode function
- Oscillating Interface System (OIS)
- Constant speed control



### Specifications

Operating speed / Vibration frequency	Standard mode	6,000 - 20,000 (min-1)
	Auto mode (no load)	6,000 - 15,000 (min-1)
	Auto mode (with load)	6,000 - 20,000 (min-1)
Weight	2.0kg (with BSL36A18 battery)	
Length	307mm	
Battery type (sold separately)	Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries	
Standard accessories	1 x Bi-metal plunge cut saw blade, 1 x Bi-metal segment saw blade, sanding plate, 9 x assorted sandpaper and accessories storage box. Batteries and charger available separately	

# AW18DBL(HRZ) 18V High Pressure Washer

Available Kit and Naked



9323624028559

- Ideal for use where mains water or electricity is not accessible
- Approx. 7 x more powerful\*<sup>1</sup> and uses 94% less water per minute\*<sup>2</sup> than a garden hose.
- Lightweight and compact

### Specifications

Discharge pressure	0.5 - 2.0 (Mpa)	
Water discharge	0.5 - 1.2 (L/min)	
Water supply method	Tank water supply / Faucet connection / Storage water supply	
Permissible water temp.	40°C or less	
Tank capacity	8L	
Weight	4.5kg (with BSL36A18 battery)	
Dimensions	Length	302mm
	Width	254mm
	Height	473mm
Battery type	BSL36A18 : Li-ion MultiVolt (Battery A)	
Standard accessories	2 x BSL36A18 MultiVolt batteries, UC18YSL3 rapid charger, trigger gun, 3m high pressure hose, variable nozzle and nozzle cleaner pin	

\*1: When the mains water pressure is approx. 0.3Mpa. The value may vary according to conditions.

\*2: The values are for reference purposes. They may vary according to conditions.



Naked: AW18DBL(H4Z)



4966376301522

# CH18DSL(H4Z) 18V Hedge Trimmer

Available Naked Only



4966376303298

- Dual action double-sided and double-edged blades
- Large front handle with safety switch
- Long cutting blade



### Specifications

No load speed	1,100 (min-1)
Cutting bar length	520mm
Cutting capacity	15mm
Weight	2.4kg (with BSL36A18 battery)
Length	846mm
Battery type (sold separately)	Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries
Standard accessories	Cutting blade bar cover. Batteries and charger available separately

## RB18DSL(DS4Z) 18V Blower & Vacuum Pack

Available Naked Only



9323624028665

- Blower and vacuum functions
- Variable speed control trigger
- Includes dustbag and various nozzles

### Specifications

Full load speed	0 - 15,000 (min-1)
Air volume	0 - 2.2 (m <sup>3</sup> /min)
Air pressure	0 - 3.9 (kPa)
Runtime	35min (with BSL36A18 battery)
Weight	1.6kg (with BSL36A18 battery)
Length	505mm
Battery type (sold separately)	Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries



### Standard accessories

Short nozzle, long nozzle, dust bag, flexible hose and adaptor, crevice nozzle and concentrator nozzle.  
Batteries and charger available separately

## R18DSL(H4Z) 18V Wet & Dry Vacuum

Available Naked Only



4966376317288

- High suction power in both wet and dry applications
- Large capacity dust and liquid case
- Semi-transparent dust case

### Specifications

Capacity	Dust: 670ml / Liquid: 120ml
Runtime	50min (with BSL36A18 battery)
Weight	15kg (with BSL36A18 battery)
Length	430mm
Battery type (sold separately)	Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries
Standard accessories	Brush, crevice and squeegee nozzle. Batteries and charger available separately



## R18DSAL(H4Z) 18V Vacuum Cleaner

Available Naked Only



4966376317226

- Highly efficient dust removal system
- Angled cut connection/collection port ensures harder suction
- Rotating ball joint within the flooring tool

### Specifications

Runtime	40min (with BSL36A18 battery)
Suction work rate	40W
Dust collecting capacity	560ml
Weight	1.5kg (with BSL36A18 battery)
Dimensions (without accessories)	Length 458mm Width 114mm Height 153mm



### Battery type (sold separately)

Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries

### Standard accessories

Flooring nozzle, crevice nozzle and extension pipe (with crevice nozzle holder).  
Batteries and charger available separately



**UB18DGL(L0Z) 18V Worklight**

Available Naked Only



4966376317707

- Massive illumination with 36 bright white LEDs
- 240° adjustable head which pivots in 16 steps
- Multiple mounting capabilities

**Specifications**

Light source	36 ultra bright white LEDs	
Illumination	Power mode	250 lx
	Save mode	140 lx
Runtime	Power mode	6.5 hrs (with BSL36A18 battery)
	Save mode	15 hrs (with BSL36A18 battery)



Weight	0.74kg (without battery)	
Dimensions	Length	198mm
	Width	256mm
	Height	252mm
Battery type (sold separately)	Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries	
Standard accessories	Batteries and charger available separately	

**UB18DGL(L0Z) 18V Worklight & Torch**

Available Naked Only



4966376317745

- Torchlight and worklight functions
- 12 ultra bright white LEDs
- Adjustable head which pivots left-right 270 degrees in seven steps and up-down 180 degrees in five steps

**Specifications**

Light source	12 x 0.5W, 1x 3W ultra bright white LEDs	
Illumination	Torch light	6,000 lx
	High (12 LED)	110 lx
	Mid (6 LED)	55 lx
	Low (3 LED)	27 lx
Runtime	Torch light	43 hrs (with BSL36A18 battery)
	High (12 LED)	16 hrs (with BSL36A18 battery)
	Mid (6 LED)	30 hrs (with BSL36A18 battery)
	Low (3 LED)	51 hrs (with BSL36A18 battery)



Weight	0.3kg (without battery)	
Dimensions	Length	205mm
	Width	78mm
	Height	108mm
Battery type (sold separately)	Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries	
Standard accessories	Shoulder strap and hook. Batteries and charger available separately	

**BSL18UA(W6Z) 18V Twin Port USB Adaptor**

Available Naked Only



4966376301669

- Compatible with MultiVolt, 14.4V and 18V HiKOKI and Hitachi slide batteries
- Twin USB ports for charging and operating USB devices
- 12V port for added versatility

**Specifications**

Charge rate	2 Amps	
Number of charges per 5.0Ah battery pack*	Smart phone	10
	Tablet	2
USB port	2	
Belt hook	Equipped	
Weight	156g (without battery)	



Dimensions (without battery)	Length	117mm
	Width	80mm
	Height	98mm
Battery type (sold separately)	Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries	
Standard accessories	Batteries and charger available separately	

\*These values are internal tests. The values are for reference purposes only. They may vary according to the state of batteries, particular device and operating conditions.

## UB18DA(W4Z) 18V Search Light

Available Naked Only



4966376328734

**NEW**

- High brightness (light flux 2,500lm)
- 4 lighting modes (Spot+Wide, Spot, Wide, Wide ECO)
- IP54 dust and water resistance



### Specifications

Output Voltage	18V	
Maximum light flux		2,500lm
	Spot +Wide	2,500lm (3hrs)
Light Flux (continuous lighting time when using an 18V battery)	Spot	1,100lm (6hrs)
	Wide	1,300lm (5.8hrs)
	Wide (ECO)	400lm (22hrs)
Weight	1.85kg (without battery)	
Dimensions	Length	280mm
	Width	203mm
	Height	204mm
Battery type (sold separately)	Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries	
Standard accessories	Batteries and charger available separately	

## DB3DL2(HLZ) 3.6V Pencil Driver Drill

Available as Kit Only



4966376306145

- 2 position operation (straight and angled)
- Manual tightening mechanism
- 2 speed gearbox with all metal gears
- Ultra bright white LED



### Specifications

Max. torque	5Nm	
No load speed	200 / 600 (min-1)	
Drive	6.35mm hex drive	
Weight	0.45kg (with EBM315 battery)	
Length	Straight	268mm
	Angled	210mm
Battery type	EBM315 3.6V 1.5Ah li-ion cassette battery	
Standard accessories	2 x EBM315 batteries, charger, driver bit and carry case	

UR18DSDL(H4Z) 18V Digital Radio With Bluetooth

Available Naked Only



- Digital signal (DAB & DAB+) receiving system
- IPX4 water protection grade
- USB terminal allows charging of smart phones and music players
- Bluetooth connection capability
- High frequency amplifier for reduced static



Specifications

AM frequency	522 - 1629 (KHz)	
FM frequency	87.5 - 108 (MHz)	
Speaker	90mm (8Ω) 7W x 2	
Weight	4.0kg (without battery)	
Dimensions (without accessories)	Length	405mm
	Width	312mm
	Height	265mm
Battery type (sold separately)	Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries	
Standard accessories	AC adaptor, 2 x AA batteries and cable holder. Batteries and charger available separately	

UR18DSML(H4Z) 18V Digital TV & Radio With Bluetooth

Available Naked Only



- High definition 8" LCD digital TV
- Digital signal (DAB & DAB+) receiving system
- IPX4 water protection grade
- Supports USB, SD card & Bluetooth
- USB terminal allows charging of smart phones and music player



Specifications

Power source	AC	Ac adaptor
	Li-ion battery	14.4-, 18V, Multivolt
TV	Tuner	DVB-T/T2
	Display	8 inch
	Display resolution	1,024x600pixel
Radio	Speaker	90mm x 2
	Maximum output	7W x 2
	Equalizer	Equipped (10 stage system)
Approx runtime	5 hours (with 18V 3.0Ah battery)	

Dimensions	Width	305mm
	Length	405mm
	Height	265mm
Weight	4.2kg	
Battery type (sold seperately)	Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide battery , AC adaptor, 2 x AA batteries and cable holder. Batteries and charger available separately	
Standard accessories	Remote control, External antenna, AC adaptor, 2 x AA batteries and cable holder. Batteries and charger available separately	



## Lithium Ion Batteries

### EBM315 3.6V 1.5Ah



### BSL1830C 18V 3.0Ah Compact



### BSL36B18 18V 8.0Ah / 36V 4.0Ah MultiVolt



### BSL36A18 18V 5.0Ah / 36V 2.5Ah MultiVolt



### 36VSTARTERPACK1Z



### 36VSTARTERPACK2Z



## Lithium Ion Battery Chargers

### UC3SFL(H0Z) 3.6V Charger



### UC18YML2(H0Z) 14.4 - 18V Two Way (AC/DC) Charger with Cooling System



### UC18YSL3(H0Z) 14.4 - 18V Rapid Charger with Cooling System & USB Port



### UC18YTSL(H0Z) 4 Port Multi Charger

NEW



### ET36A(H0Z) 36V Battery Adaptor

NEW



## Site Bags

### 402094 Large Site Bag



### 402096 Premium Site Bag with Extendable Handle & Wheels



## Stackable Cases

### 402538 Case I Accessory Organiser

295 x 395 x 105mm



4549115077508



### 402541 Case IV

295 x 395 x 315mm



4549115077539



### 402545 Case II

295 x 395 x 158mm



4549115077577



### 402542 3 x Accessory Case Dividers

(To Suit Case I) 213 x 106 x 63mm



4549115077546



### 402546 Case III

295 x 395 x 210mm



4549115077584



### 402543 Caster Wheels

372 x 526 x 140mm



4549115077553



## Stackable Case Inserts

Insert Number	Barcode	Insert To Suit (Tool)	Tool Description	Insert To Suit Stackable case
373223	4549115181052	WR36DA / WR36DB	MultiVolt Impact Wrenches	Stackable Case III
373070	4549115174467	G3613DA / G3613DB	MultiVolt Angle Grinders	Stackable Case II
373646	4549115187139	C3607DA	MultiVolt Circular Saw	Stackable Case IV
373135	4549115175563	DH36DPC	MultiVolt Rotary Hammer	Stackable Case IV
339368	4549115112636	Twin Tools Insert	Impact Driver Drills/ Driver Drills/ Impact Drivers/ Impact Wrenches	Stackable Case III
336475	4549115055056	Single Tool Insert	Impact Driver Drills/ Driver Drills/ Impact Drivers/ Impact Wrenches	Stackable Case II
339219	4549115106437	C18DBAL	Circular Saw	Stackable Case IV
337529	4549115079540	C18DSL	Circular Saw	Stackable Case IV
337937	4549115090927	CV18DBL	Multi Tool	Stackable Case II & III
337114	4549115072954	DH18DSL	Rotary Hammer	Stackable Case II
337288	4549115075214	DN18DSL	Angle Drill	Stackable Case III
338872	4549115099494	G18DBAL	Angle Grinder	Stackable Case II
337113	4549115072947	G18DSL	Angle Grinder	Stackable Case II
337742	4549115083967	P18DSL	Planer	Stackable Case III
337112	4549115072930	WF18DSL	Screw Driver	Stackable Case III
337109	4549115072909	WR18DSHL	Impact Wrench	Stackable Case III
370331	4549115128545	DH18DBL / DH18DBQL	Rotary Hammers	Stackable Case IV
375224	4549115213081	NR1890DBCL	Framing Nailer	Stackable Case IV

**UV3628DA(H4Z)** 36V Brushless Vibrator

Available Naked Only

**NEW**

- Ergonomic designed grip
- Flexible shaft assembly
- Constant speed control
- Continuous operating time: 38mins

**COMING SOON**

**Specifications**

Vibrator diameter	28mm
Vibrations per min	15,200 (min-1) High 12,000 (min-1) Low
Weight	4.2Kg (inc battery)
Shaft Length	820mm
Battery type (Sold separately)	Compatible with HiKOKI MultiVolt batteries

\*Image for illustration purposes only

**UM36DA(H4Z)** 36V Brushless Mixer

Available as Kit Only

**NEW**

- Constant speed control
- Variable speed triggers
- 2 Speed settings (Hi / Low)
- Lock on/off switch
- Safety lock off switch for minimizing accidental starts

**COMING SOON**

**Specifications**

Stirrer Mounting	M12
Stirrer Diameter	150mm
Weight	3.5Kg (inc battery)
Length	900mm
Battery type (Sold separately)	Compatible with HiKOKI MultiVolt batteries

\*Image for illustration purposes only



**DH18DPA(H4Z) 18V SDS Plus Rotary Hammer**

Available Naked Only

**NEW**

- Idle striking prevention mechanism
- Variable speed
- RFC kick back control
- Auto stop function
- Power / save mode allows the user to select the suitable speed for the job

**COMING SOON****Specifications**

Capacity	Masonry	18mm
	Wood	18mm
	Steel	13mm
No load speed	950 (min-1)	
Impact rate	5,600 (min-1)	
Weight	2.4Kg	
Length	271mm	
Battery type (Sold separately)	Compatible with HiKOKI MultiVolt batteries	
Standard accessories	Side handle and depth gauge. Batteries and charger available separately	

**DH18DPB(H4Z) 18V SDS Plus Rotary Hammer**

Available Naked Only

**NEW**

- Idle striking prevention mechanism
- Variable speed
- RFC kick back control
- Auto stop function
- Power / save mode allows the user to select the suitable speed for the job

**COMING SOON****Specifications**

Capacity	Masonry	18mm
	Wood	18mm
	Steel	13mm
No load speed	950 (min-1)	
Impact rate	5,600 (min-1)	
Weight	2.4Kg	
Length	2271mm	
Battery type (Sold separately)	Compatible with HiKOKI MultiVolt batteries	
Standard accessories	Side handle and depth gauge. Batteries and charger available separately	

**DH36DPE(H4Z) 36V SDS Plus Rotary Hammer**

Available Naked Only

**NEW**

- Idle striking prevention mechanism
- Variable speed
- RFC kick back control
- Auto stop function
- Power / save mode allows the user to select the suitable speed for the job

**COMING SOON****Specifications**

Capacity	Masonry	28mm
	Wood	32mm
	Steel	13mm
No load speed	1,100 (min-1)	
Impact rate	4,300 (min-1)	
Weight	3.6Kg	
Length	339mm	
Battery type (Sold separately)	Compatible with HiKOKI MultiVolt batteries	
Standard accessories	Side handle and depth gauge. Batteries and charger available separately	

**CR18DA(H4Z) 18V Reciprocating Saw**

Available Naked Only

**NEW**

- Compact and well balanced design
- Unique Jigsaw blade attachment
- Shoe adjustment

**Specifications**

Capacity	Masonry	50mm
	Plastic Pipe	50mm
No load speed	0 - 3,200 (min-1)	
Weight	1.7Kg	
Length	350mm	
Battery type (Sold separately)	Compatible with HiKOKI MultiVolt batteries	



\*Image for illustration purposes only



# 02

# Pneumatic





## N3804AB3(H2Z) 38mm Narrow Crown Stapler



4966376296965

- Both single & bump fire
- Tool-less depth dial
- Tool-less release for clearing jammed staples
- 360° adjustable exhaust directs air away from user

### Specifications

Fastener series	18 gauge 6000 series staples
Pressure range	70 – 120 psi
Max. capacity	125 staples
Dimensions	263 x 235mm
Weight	1.0kg
Standard accessories	Nose protector, safety glasses and carry case



## NT50AE2(H2Z) 50mm C1 Series Brad Nailer



4966376297153

- Both single & bump fire
- Tool-less depth dial
- Tool-less release for clearing jammed nails
- 360° adjustable exhaust directs air away from user
- Replacement O-Ring kit (886375)

### Specifications

Fastener series	18 gauge C1 series brad nails
Pressure range	70 – 120 psi
Max. capacity	100 nails
Dimensions	254 x 233mm
Weight	1.0kg
Standard accessories	Nose protector, safety glasses and carry case



## NT65M2(H2Z) 65mm C Series Finish Nailer



4966376297252

- Both single & bump fire
- Tool-less depth dial
- Replacement O-Ring kit (885914)
- Tool-less release for clearing jammed nails
- 360° adjustable exhaust directs air away from user
- Unique integrated air duster acts as a dust gun

### Specifications

Fastener series	16 gauge C series finish nails
Pressure range	70 – 120 psi
Max. capacity	100 nails
Dimensions	295 x 285mm
Weight	1.7kg
Standard accessories	Nose protector, safety glasses and carry case





## NT65MA4(H2Z) 65mm DA Series Finish Nailer



4966376297283

- Both single & bump fire
- Tool-less depth dial
- Tool-less release for clearing jammed nails
- 360° adjustable exhaust directs air away from user
- Unique integrated air duster acts as a dust gun

### Specifications

Fastener series	15 gauge DA series finish nails
Pressure range	70 – 120 psi
Max. capacity	100 nails
Dimensions	344 x 304mm
Weight	1.9kg
Standard accessories	Nose protector, safety glasses and carry case



Pneumatic

## NR90AD(H4Z) 90mm Framing Nailer



9323624028627

- Both single & bump fire
- Tool-less depth dial
- Heavy-duty design
- Magazine with bypass for faster reload speed
- Replacement O-Ring kit (884991)

### Specifications

Fastener series	Paper collated clipped head strip nails	
Pressure range	70 – 120 psi	
Max. capacity	50 x 2.8mm	95 nails
	75 x 3.06mm	90 nails
	90 x 3.3mm	85 nails
Dimensions	462 x 322mm	
Weight	3.2kg	
Standard accessories	Safety glasses and hanger bracket	



NV65AF3(H1Z) 65mm Wire  
& Plastic Collated Coil Nailer



- Both single & bump fire
- Tool-less depth dial
- 360° adjustable exhaust directs air away from user



Specifications

Fastener series	16° wire collated or 15° plastic collated coil nails
Pressure range	70 – 120 psi
Max. capacity	200 - 400 nails
Dimensions	282 x 297mm
Weight	1.9kg
Standard accessories	Nose protector, safety glasses and carry case

Application Guide for Pneumatics

Application	N3804AB3	NT50AE2	NT65M2	NT65MA4	NR90AD	NV65AF3
Furniture and Upholstry	•					
Hand and Hobby Crafts	•	•				
Panelling and Picture Framing	•	•	•			
Shop Fitting and Cabinet Making	•	•	•	•		
Finish Nailing Timber & Plastic Trim		•	•			
All Fine Fit Out Work		•				
Skirting Boards		•	•	•		
Door Jambs			•	•		
Architraves		•	•	•		
Construction of Eaves			•	•		
Window Manufacture				•		
House Framing and Roof Trusses					•	
Decking and Fencing					•	•
Flooring					•	
Cladding					•	•
Pallet and Crate Manufacture					•	•
Ply Bracing and Strapping						•
Triple Grips and Joist Hangers						•
Tile Underlay						•

## WR14A(H1Z) 12.7mm (1/2") Impact Wrench



- Lightweight and compact at only 1.8kg and 184mm length
- High performance motor allows high torque
- Ergonomic soft grip handle

### Specifications

Capacity	Ordinary bolt	M15
	High tension bolt	M14
Square drive	12.7mm (1/2")	
Max tightening torque	785Nm	
Operating pressure	90psi	
Air consumption (at 0.62MPa)	4.6 (cu ft/min)	
No load speed	7,200rpm	
Sound power level (No load)	85.3dB(A)	
Sound power level (Load)	88.2dB(A)	
Dimensions (LxWxH)	184 x 68 x 205mm	
Weight	1.8kg	
Standard accessories	Oil and clip	



## WR27A(H1Z) 19mm (3/4") Impact Wrench



- High performance motor allows high torque
- Strong aluminium front housing
- Ergonomic soft grip rubber handle

### Specifications

Capacity	Ordinary bolt	M38
	High tension bolt	M27
Square drive	19mm (3/4")	
Max tightening torque	1,760Nm	
Operating pressure	90psi	
Air consumption (at 0.62MPa)	6.9 (cu ft/min)	
No load speed	6,800rpm	
Sound power level (No load)	98.9dB(A)	
Sound power level (Load)	102.5dB(A)	
Dimensions (LxWxH)	216 x 84 x 233mm	
Weight	1.8kg	
Standard accessories	Oil and clip	





## WW8A(H1Z) 6.35mm (¼") Ratchet Wrench



4966376325733

- High torque at 34Nm
- Ergonomic soft grip rubber handle



### Specifications

Capacity	Ordinary Bolt	M10
	High Tension Bolt	M8
Max Tightening Torque	34Nm	
Operating Pressure	90psi	
Air Consumption (at 0.62MPa)	2.55cfm(cu ft/min)	
Square Drive	6.35mm	

No Load Speed	270rpm
Sound Power Level	89.1dB(A)
Dimensions (LxWxH)	170 x 35 x 45mm
Weight	0.5kg
Standard Accessories	Oil

## WW10A(H1Z) 12.7mm (½") Ratchet Wrench



4966376325726

- Ergonomic soft grip rubber handle
- High 95Nm of torque



### Specifications

Capacity	Ordinary Bolt	M13
	High Tension Bolt	M10
Max Tightening Torque	95Nm	
Operating Pressure	90psi	
Air Consumption (at 0.62MPa)	2.52cfm(cu ft/min)	
Square Drive	12.7mm	

No Load Speed	160rpm
Sound Power Level	91.6dB(A)
Length	293mm
Weight	1.3kg
Standard Accessories	Oil

## SV15A(H1Z) 150mm Orbital Sander



4966376325696

- Rubber grip for reduced vibration
- Compact and lightweight at only 184mm height and 1.8kg



### Specifications

Pad Diameter	150mm
Orbit Diameter	5mm
Operating Pressure	90psi
Air Consumption (at0.62MPa)	2.4 (cu ft/min)
No Load Speed	12,000rpm

Sound Power Level (Load)	86.7dB(A)
Dimensions (LxWxH)	195 x 148 x 106mm
Weight	0.9kg
Standard Accessories	Oil and Wrench

# 03 Drilling and Fastening



## Quick Reference Guide For Drills

Model	Handle Type	Steel Drilling Dia. (mm)	No Load Speed (min-1)	Power Input (W)	Speed Control			High Torque
					Variable Speed	2-Speed	Reversible	
D13VL(H6Z)	Pistol grip	13	0 - 1,100 / 0 - 3,000	860	•	•	•	
D13VG(H1Z)	Pistol grip	13	0 - 600	710	•		•	•
D13(H1Z)	D-shaped	13	550	720			•	•

### D13VL(H6Z) 13mm Drill with Safety Slip Clutch



4966376271221

- All metal keyless chuck
- AHB (Aluminium Housing Body)
- Safety slip clutch
- Variable speed trigger and dial
- Carbon brush rotation system increases power and extends brush life

#### Specifications

Chuck	13mm keyless	
Capacity	Steel	13mm
	Wood	40mm
Input power	860W	
No load speed	High	0 - 3,000 (min-1)
	Low	0 - 1,100 (min-1)



Weight	2.9kg
Length	363mm
Standard accessories	Side handle and depth gauge

### D13VG(H1Z) 13mm High Torque Drill



4966376270972

- Heavy-duty keyed chuck
- Aluminium gear cover and inner cover
- Variable speed
- Forward and reverse
- Suitable for auger, hole saw and mixing applications

#### Specifications

Chuck	13mm keyed	
Capacity	Steel - twist bit	13mm
	Steel - hole saw	70mm
	Wood - spade bit	40mm
	Wood - auger	38mm
	Wood - hole saw	114mm
Input power	710W	



Max. torque	78Nm
No load speed	0 - 600 (min-1)
Weight	2.1kg
Length	287mm
Standard accessories	Chuck key, side handle, handle extension and carry case



## D13(H1Z) 13mm High Torque Drill



- Triple reduction gearing for high torque applications
- Heavy-duty keyed chuck
- Aluminium front cover
- Forward and reverse
- Ideal for auger and mixing applications

### Specifications

Chuck	13mm keyed	
Capacity	Steel	13mm
	Wood	40mm
Input power	720W	
No load speed	550 (min-1)	

Weight	3.0kg
Length	378mm
Standard accessories	Chuck key, "D" shaped rear handle and side handle



## B16RM(HWZ) 380mm Pedestal Drill Press



- Variable speed (12 speed sections)
- Keyed on/off switch
- Cast iron table surface
- Laser guide for accurate drilling
- Depth adjustment gauge

### Specifications

Chuck	16mm keyed	
Capacity	Swing	380mm (throat depth - 190mm)
	Spindle travel	85mm
Input power	750W induction motor	
Rotation speed (12 speeds)	210 - 2,580 (min-1)	
Table size	336 x 336mm	
Table tilt	45° left or right	
Weight	75kg	
Length	1,618mm	
Standard accessories	Chuck key, wedge (drift) and hex keys	



Quick Reference Guide For Impact (Hammer) Drills

Model	Handle Type	Concrete Drilling Dia. (mm)	No Load Speed (min-1)	Power Input (W)	Speed Control			Application	
					Variable Speed	2-Speed	Reversible	Medium Duty	Heavy-duty
DV16VSS(HAZ)	Pistol grip	16	0 - 2,900	600	•		•	•	
DV20VD(H1Z)	Pistol grip	20	0 - 1,100 / 0 - 3,000	860	•	•	•		•
DV22V(H6Z)	Pistol grip	22	0 - 1,100 / 0 - 3,000	1,120	•	•	•		•



DV16VSS(HAZ) 13mm Impact Drill



- Lightweight and compact
- Variable speed trigger
- Forward and reverse
- Durable cylindrical housing

Specifications		
Chuck	13mm keyless	
	Concrete	16mm
Capacity	Steel	13mm
	Wood	25mm
Input power	600W	
No load speed	0 - 2,900 (min-1)	
Impact rate	0 - 34,500 (min-1)	
Weight	1.5kg	
Length	269mm	
Standard accessories	Side handle, depth gauge and carry case	

## DV20VD(H1Z) 20mm Impact Drill



- Heavy-duty keyed chuck
- AHB (Aluminium Housing Body)
- Full speed reverse
- Variable speed trigger and dial
- Carbon brush rotation system increases power and extends brush life



Drilling

### Specifications

Chuck	13mm keyed	
	Concrete	20mm
Capacity	Steel	13mm
	Wood	40mm
Input power	860W	
No load speed	Low	0 - 1,100 (min-1)
	High	0 - 3,000 (min-1)

Impact rate	Low	0 - 8,100 (min-1)
	High	0 - 22,000 (min-1)
Weight	3.0kg	
Length	365mm	
Standard accessories	Chuck key, side handle, depth gauge and stackable case	

## DV22V(H6Z) 22mm Impact Drill with Safety Slip Clutch



- All metal keyless chuck
- AHB (Aluminium Housing Body)
- Safety slip clutch
- Full speed reverse
- Lock off (deadman) variable speed trigger and dial
- Carbon brush rotation system increases power and extends brush life



### Specifications

Chuck	13mm keyless	
	Concrete	22mm
Capacity	Steel	13mm
	Wood	40mm
Input power	1,120W	
No load speed	Low	0 - 1,100 (min-1)
	High	0 - 3,000 (min-1)

Impact rate	Low	0 - 8,100 (min-1)
	High	0 - 22,000 (min-1)
Weight	3.0kg	
Length	363mm	
Standard accessories	Chuck key, side handle, depth gauge and stackable case	



Quick Reference Guide for Screw Drivers

Model	No Load Speed (min-1)	Power Input (W)	Applicable Fasteners				Weight (kg)
			Machine Screw	Self Drilling Screw	Drywall Screw	Wood Screw	
W6VB3(H1Z)	0 - 2,600	620	6mm	6mm	6mm	5.8mm	1.5
W8VB2(H1Z)	0 - 1,700	620	6mm	8mm	6mm	6.2mm	1.5

W6VB3(H1Z) Screw Driver



- Ideal for self-drilling / TEK screw
- Variable speed
- Forward and reverse
- Aluminium cover and inner cover for increased durability

Specifications

Bit shank	6.35mm hex		Input power		620W	
	Machine screw	6mm	No load speed		0 - 2,600 (min-1)	
Capacity	Drywall screw	6mm	Weight		1.5kg	
	Self-drilling screw	6mm	Length		312mm	
	Wood screw	5.8mm	Standard accessories		Magnetic hex socket and sub stopper	



W8VB2(H1Z) Screw Driver



- Ideal for self-drilling / TEK screw
- Variable speed
- Forward and reverse
- Aluminium cover and inner cover for increased durability

Specifications

Bit shank	6.35mm hex		Input power		620W	
	Machine screw	6mm	No load speed		0 - 1,700 (min-1)	
Capacity	Drywall screw	6mm	Weight		1.5kg	
	Self-drilling screw	8mm	Length		312mm	
	Wood screw	6.2mm	Standard accessories		Magnetic hex socket and sub stopper	



Accessories For Screw Drivers

	Part No.	Description	Barcode	For Model
	752398	Magnetic Bit Holder (41L)	8717472814098	W6VB3, W8VB2
	985322	5/16" Magnetic Hex Socket	4966375115793	W6VB3, W8VB2
	317671	Sublocator for 5/16" Hex Socket	4966375287308	W6VB3, W8VB2

## WR22SE(H1Z) 19mm (3/4") Brushless Impact Wrench



- AHB (Aluminium Housing Body)
- Soft grip handle
- Adjustable side handle
- Can be used with a petrol powered generator

### Specifications

Drive	19mm (3/4")	
Capacity	Ordinary bolt	14 - 24mm
	High tension bolt	16 - 22mm
Input power	800W*	
Torque	620Nm	
No load speed	1,400 (min-1)	
Impact rate	2,000 (min-1)	
Weight	4.6kg	
Length	280mm	
Standard accessories	Side handle and carry case. Socket not included	

\*800W brushless motor is equivalent to 950W brushed motor



## WR25SE(H1Z) 25.4mm (1") Brushless Impact Wrench



- AHB (Aluminium Housing Body)
- Soft grip handle
- Adjustable side handle
- Can be used with a petrol powered generator

### Specifications

Drive	25.4mm (1")	
Capacity	Ordinary bolt	22 - 30mm
	High tension bolt	22 - 24mm
Input power	900W*	
Torque	1,000Nm	
No load speed	1,100 (min-1)	
Impact rate	1,500 (min-1)	
Weight	7.7kg	
Length	340mm	
Standard accessories	Side handle and carry case. Socket not included	

\*900W brushless motor is equivalent to 1070W brushed motor



The Li-ion battery  
cordless nailer series

# Blending portability with power.



Experience the same power as pneumatic nailers, but without an air hose or compressor. Besides the portability, the HiKOKI Cordless Nailer series have a great gravity balance and an ergonomic soft grip, which makes your job as easy and comfortable as possible. The unique air spring drive system, which is integrated inside the machine, requires no gas cartridges, so maintenance is minimised.

The Dry-fire lockout prevents unwanted marks or scratches on the material, so you can rely on a well-finished result.



**HiKOKI**  
HIGH PERFORMANCE POWER TOOLS



04

# Rotary and Demolition



**BRUSH  
LESS**  
Brushless Motor



## AC Brushless Motor Series

# Long-lasting efficiency.

The professional no longer has to worry about losing voltage and power when using an extension cord. Our AC Brushless Motor series feature electronic control that offers continuous and constant power output. This technology brings a whole new level of performance and durability to our heavy duty range of power tools. With the innovative AC Brushless Motor you'll experience more power and less energy consumption.

We have also eliminated some major wearing parts, which means a compact and lightweight power tool, less wear and tear and less maintenance. This also contributes to the fact that the motor lasts longer and operates far more efficiently than conventional brushed motors.

**HiKOKI**  
HIGH PERFORMANCE POWER TOOLS

## Quick Reference Guide For Rotary Hammers

Model	Concrete Drilling Dia. (mm)	Brushless Motor	Speed Control		Function Mode			Safety Clutch	Bit Shank Type	
			Variable	Reversible	Hammer Drilling	Drilling Only	Hammering Only		SDS Plus	SDS Max
DH26PC2	26		•	•	•	•	•	•	•	
DH28PEC(H1Z)	28	•	•	•	•	•	•	•	•	
DH28PC(H1Z)	28		•	•	•	•	•		•	
DH40MEY(H1Z)	40	•	•		•		•	•		•
DH45MEY(H1Z)	45	•	•		•		•	•		•
DH52MEY(H1Z)	52	•	•		•		•	•		•

### DH26PC2(H1Z) 26mm SDS Plus Rotary Hammer



**NEW**



- Compact and lightweight
- High drilling speed to work more efficiently
- 3 Modes: hammer drilling, drilling only and hammering only
- Soft grip handle and side handle to further improve user comfort

#### Specifications

Bit Shank	SDS Plus	
Capacity	Concrete	26mm
	Steel	13mm
	Wood	32mm
Input power	830W	
No load speed	0 - 1,100 (min-1)	

Full load Impact	0 - 4,300 (min-1)
Joules	2.9j
Weight	2.8kg
Length	349mm
Standard accessories	Side handle, depth gauge and carry case

### DH28PEC(H1Z) 28mm SDS Plus Brushless Rotary Hammer



**NEW**



- Concrete capacity 28mm
- High speed performance
- Auto stop function and Constant Speed control
- Variable speed modes: Normal / Low
- Kick back control (RFC)
- Shock absorbing handle reduced vibration by 25%

#### Specifications

Bit Shank	SDS Plus	
Capacity	Concrete	28mm
	Steel	13mm
	Wood	32mm
Input power	900W	
No load speed	0 - 950 (min-1)	
Full load Impact	0 - 4,300 (min-1)	

Joules	3.4j
Weight	3kg
Length	355mm
Standard accessories	Side handle, depth gauge, and carry case



# Demolition Rotary Hammers.

When you can't afford the downtime, stick with old faithful, Japanese engineered, trade grade tools.

Rotary and  
Demolition



## DH40MEY(H1Z) 40mm SDS Max Brushless Rotary Hammer



- 2-mode action: hammer drilling and hammering only
- UVP (User Vibration Protection) shock absorbing handle & internal vibration absorber
- AHB (Aluminium Housing Body)
- 12 stage adjustable tool bit angle
- Push button adjustable impact rate and variable speed
- Can be used with a petrol powered generator
- Safety slip clutch

Specifications		
Bit Shank	SDS Max	
Capacity	Concrete - drill bit	40mm
	Concrete - core bit	105mm
Input power	1,150W	
No load speed	250, 330, 410 & 500 (min-1)	
Full load Impact	1,430, 1,900, 2,370 & 2,850 (min-1)	
Joules	11j	
Weight	7.5kg	
Length	477mm	
Standard accessories	Side handle, depth gauge, grease pack and carry case	

## DH45MEY(H1Z) 45mm SDS Max Brushless Rotary Hammer



- 2-mode action: hammer drilling and hammering only
- UVP (User Vibration Protection) shock absorbing handle & internal vibration absorber
- AHB (Aluminium Housing Body)
- 12 stage adjustable tool bit angle
- Push button adjustable impact rate and variable speed
- Can be used with a petrol powered generator
- Safety slip clutch



### Specifications

Bit Shank	SDS Max	
Capacity	Concrete - drill bit	45mm
	Concrete - core bit	125mm
Input power	1,500W	
No load speed	120, 180, 240 & 310 (min-1)	
Full load Impact	1,200, 1,700, 2,300 & 2,950 (min-1)	
Joules	13.4j	
Weight	9.5kg	
Length	535mm	
Standard accessories	Side handle, depth gauge, grease pack and carry case	

Rotary and  
Demolition

## DH52MEY(H1Z) 52mm SDS Max Brushless Rotary Hammer



- 2-mode action: hammer drilling and hammering only
- UVP (User Vibration Protection) shock absorbing handle & internal vibration absorber
- AHB (Aluminium Housing Body)
- 12 stage adjustable tool bit angle
- Push button adjustable impact rate and variable speed
- Can be used with a petrol powered generator
- Safety slip clutch



### Specifications

Bit Shank	SDS Max	
Capacity	Concrete - drill bit	52mm
	Concrete - core bit	160mm
Input power	1,500W	
No load speed	110, 160, 220 & 280 (min-1)	
Full load Impact	1,000, 1,400, 1,900 & 2,400 (min-1)	
Joules	22j	
Weight	11.5kg	
Length	585mm	
Standard accessories	Side handle, depth gauge, grease pack and carry case	

## Quick Reference Guide For Demolition Hammers

Model	Bit Shank Type	Weight (kg)	Brushless Motor	AHB	UVP	Shock Absorbing Handle	Adjustable Side Handle	Impact Energy Per Stroke (Joules)
H41ME(H1Z)	SDS Max	5.1	•			•	•	10
H45MEY(H1Z)	SDS Max	7.3	•	•	•	•	•	13.5
H60MEY(H1Z)	SDS Max	12.2	•	•	•	•	•	26.5
H65SB3(H1Z)	30mm Hex	18		•	•	•	•	45
H90SG(H1Z)	28.5mm Hex	32		•	•	•		70

### H41ME(H1Z) 5.1kg SDS Max Brushless Demolition Hammer


**NEW**

- One touch chuck
- Aluminium connecting rod
- Lightest in its class (EPTA procedure). 0.59kg lighter than conventional model
- Built in protection circuit
- Shock absorbing handle
- Large trigger with on-lock



#### Specifications

Bit Shank	SDS Max
Input power	1,050W
Full load Impact	1,500, 2,000, 2,500 & 2,870 (min-1)
Joules	10j

Weight	5kg
Length	427mm
Standard accessories	280mm bull point, side handle and carry case

### H45MEY(H1Z) 7.3kg SDS Max Brushless Demolition Hammer



- UVP (User Vibration Protection) shock absorbing handle & internal vibration absorber
- AHB (Aluminium Housing Body)
- 12 stage adjustable tool bit angle
- Push button adjustable impact rate
- Can be used with a petrol powered generator
- Overload protection



#### Specifications

Bit Shank	SDS Max
Input power	1,150W
Full load Impact	1,430, 1,900, 2,370 & 2,850 (min-1)
Joules	13.5j

Weight	7.3kg
Length	480mm
Standard accessories	280mm bull point, side handle and carry case



## H60MEY(H1Z) 12.2kg SDS Max Brushless Demolition Hammer



4966376288663

- UVP (User Vibration Protection) shock absorbing handle & internal vibration absorber
- AHB (Aluminium Housing Body) for increased motor durability
- 12 stage adjustable tool bit angle
- Push button adjustable impact rate
- Can be used with a petrol powered generator
- Overload protection



### Specifications

Bit Shank	SDS Max
Input power	1,500W
Full load Impact	1,500, 1,700, 1,900 & 2,100 (min-1)
Joules	26.5j
Weight	12.2kg
Length	585mm
Standard accessories	280mm bull point, side handle and carry case

Rotary and Demolition

## H65SB3(H1Z) 18kg 30mm Hex Demolition Hammer






4966376288786

- High demolishing performance with low vibration and noise
- UVP (User Vibration Protection) shock absorbing handle & internal vibration absorber
- AHB (Aluminium Housing Body)
- Large trigger switch with lock on function
- Service kit available (371002)
- Hard carry case available (339664)



### 30mm Hexagon with Collar

	Description	Size (mm)	Product Code	Barcode
	Bull Point	410	401036	4549115002043
	Cold Chisel	35 x 410	401990	4549115045293



### Specifications

Bit Shank	30mm Hex
Input power	1,400W
Full load Impact	1,400 (min-1)
Joules	45j
Weight	18kg
Length	731mm
Standard accessories	Bull point, chisel, hex bar wrench and carry case with wheels

# User Vibration Protection.

Our policy is to design tools with maximum inbuilt protection against excessive vibration, whether equipping them with spring-operated dynamic vibration absorbers or building-in special, vibration absorbing handles. Not only is UVP good for operator safety by helping to safeguard against White Knuckle Syndrome, it's good for business. After all, the higher the degree of comfort and ease of use, the more efficient an operator can be for longer.

Rotary and  
Demolition

## H90SG(H1Z) 32kg 28.5mm Hex Demolition Hammer





4966376289066

- Designed for heavy demolition work
- UVP (User Vibration Protection) shock absorbing handle & internal vibration absorber
- Ergonomic soft grip handles
- Ideal substitute for air operated compressor equipment
- Service kit available (338319)

### Specifications



Bit Shank	28.5mm
Input power	2,000W
Full load Impact	1,000 (min-1)
Joules	70j
Weight	32kg
Length	860mm
Standard accessories	Hex bar wrench (M6)

### 28mm Hexagon with Collar

	Description	Size (mm)	Product Code	Barcode
	Bull Point	550	751571	8717472818539
	Cold Chisel	36 x 550	751572	8717472818546




### Hammer Grease

	Part No.	Description	Size	Barcode	Suitable Models	
  	981840	Crank mechanism grease	30g	4966375124375	H25PV H41MB	H60MEY H60MRV
	308471	Crank mechanism grease	70g	4966375124368	H41SC H45MR	H70SA H65SB2
	980927	Crank mechanism grease	500g	4966375112747	H45MRY H45ME	H65SB3 H90SB
	714833	Gear grease	100g	8717574028515	H45MEY	H90SG



# 05 Grinding and Cutting

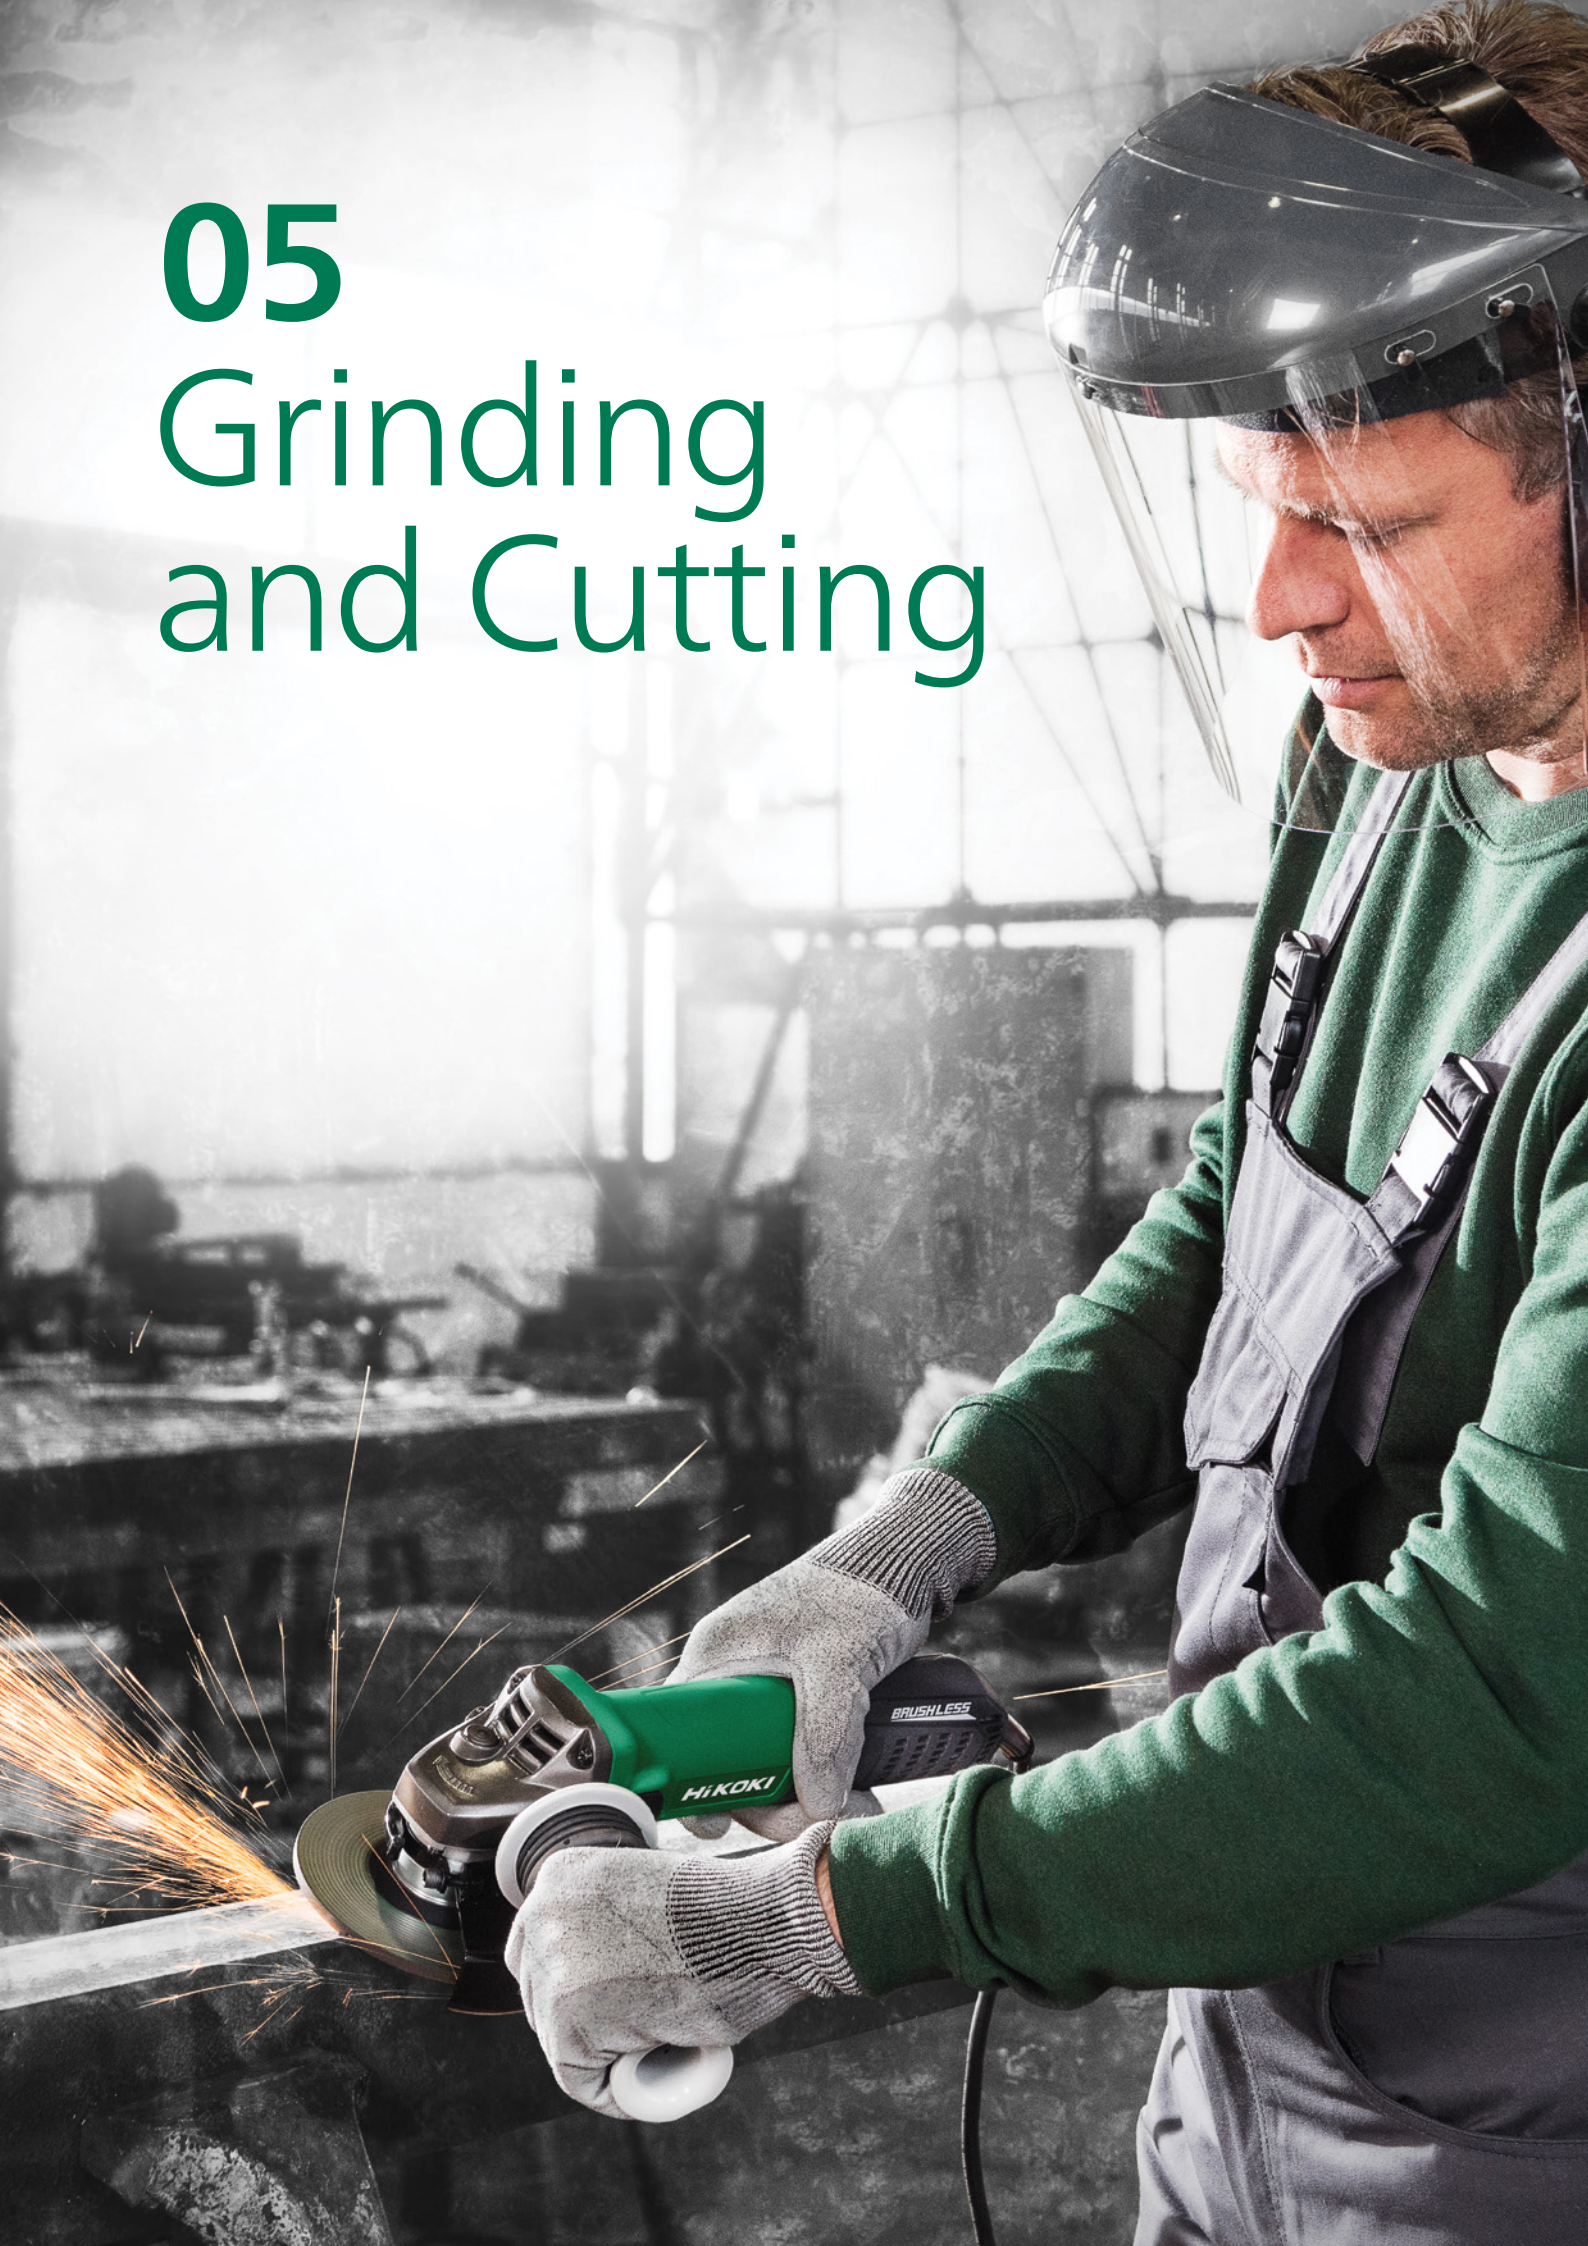



## Quick Reference Guide for Grinders

Model	Wheel Diameter (mm)	Input Power (W)	No Load Speed (min-1)	Switch Type	Safety (Deadman) Switch	Lock On Switch	Anti-vibration Handle	UVP	Spindle Thread	Weight (kg)
G10SR4(H6Z)	100	730	10,000	Slide		•			M10 x 1.5	1.7
G13SR4(H6Z)	125	730	10,000	Slide		•			M14 x 2	1.8
G13SB3(H1Z)	125	1,300	11,000	Slide		•			M14 x 2	1.9
G13VE(H1Z)	125	1320	2,800 - 10,000	Slide		•	•		M14 x 2	2.1
G13SE2(H1Z)	125	1,200	11,000	Paddle	•		•		M14 x 2	1.9
G13YC2(H1Z)	125	1,430	10,500	Paddle	•		•		M14 x 2	2.0
G13SC2(H1Z)	125	1,200	10,000	Trigger	•		•		M14 x 2	2.8
G18SE4	180	2,400	8,500	Trigger	•		•		M14 x 2	5.9
G23ST(H1Z)	230	2,000	6,600	Trigger	•				M14 x 2	5.0
G23UDY2(H1Z)	230	2,400	6,600	Trigger	•		•	•	M14 x 2	6.3

**BRUSH  
LESS**  
Brushless Motor

AC Brushless Motor Series

**Lighter. Easier.  
Safer.**



**HiKOKI**  
HIGH PERFORMANCE POWER TOOLS

## Power on long and strong.

HiKOKI brushless AC motors deliver greater durability and longer life even under heavy use. There are no carbon brushes to regularly replace and no risk of armature burnout, or commutator wear. Because brushless motors run cooler, look forward to stable performance even when there's voltage drop from using long extension cords.



Grinding  
and Cutting

### G13VE(H1Z) 125mm Brushless Angle Grinder with Slide Switch



4966376274994

- Lightweight and slim design
- Kickback protection, restart protection and soft start control
- Lockable slide switch on side
- Variable speed
- Can be used with a petrol powered generator
- Tool-less wheel guard adjustment

#### Specifications

Wheel diameter	125mm
Input power	1,320W
No load speed	2,800 - 10,000 (min-1)
Hole diameter	22.2mm
Spindle thread	M14 x 2
Weight	2.1kg
Length	305mm
Standard accessories	Anti-vibration side handle, grinding wheel and wrench

## G10SR4(H6Z) 100mm Angle Grinder with Slide Switch



4966376271856

- Lightweight and compact
- Lockable slide switch
- Two position side handle

### Specifications

Wheel diameter	100mm
Input power	730W
No load speed	10,000 (min-1)
Hole diameter	16mm
Spindle thread	M10 x 1.5



Weight	1.7kg
Length	258mm
Standard accessories	Side handle, grinding wheel, wrench and carry case

## G13SR4(H6Z) 125mm Angle Grinder with Slide Switch



4966376274451

- Lightweight and compact
- Lockable slide switch two position side handle

### Specifications

Wheel diameter	125mm
Input power	730W
No load speed	10,000 (min-1)
Hole diameter	22.2mm
Spindle thread	M14 x 2



Weight	1.8kg
Length	258mm
Standard accessories	Side handle, grinding wheel, wrench and carry case

## G13SB3(H1Z) 125mm Angle Grinder with Slide Switch



4966376273577

- Lightweight and compact
- Lockable slide switch
- Two position side handle

### Specifications

Wheel diameter	125mm
Input power	1,300W
No load speed	11,000 (min-1)
Hole diameter	22.2mm
Spindle thread	M14 x 2



Weight	1.9kg
Length	283mm
Standard accessories	Anti-vibration side handle, grinding wheel and wrench



## G13SE2(H1Z) 125mm Angle Grinder with Paddle (Deadman) Switch



4966376273911

- Paddle (deadman) switch for user safety
- Tool-less wheel guard adjustment
- Two position anti-vibration handle

### Specifications

Wheel diameter	125mm
Input power	1,200W
No load speed	11,000 (min-1)
Hole diameter	22.2mm
Spindle thread	M14 x 2



Weight	1.9kg
Length	321mm
Standard accessories	Anti-vibration side handle, grinding wheel and wrench

## G13YC2(H1Z) 125mm Angle Grinder with Paddle (Deadman) Switch



4966376275045

- Paddle (deadman) switch for user safety
- Constant speed control, soft start, overload protection, kick back protection and restart protection
- Tool-less wheel guard adjustment
- Suitable for mining, petroleum and gas industry, maintenance and construction industries
- Two position anti-vibration handle

### Specifications

Wheel diameter	125mm
Input power	1,430W
No load speed	10,500 (min-1)
Hole diameter	22.2mm
Spindle thread	M14 x 2



Weight	2.0kg
Length	323mm
Standard accessories	Anti-vibration side handle, grinding wheel, hex wrench and wrench

Grinding and  
Cutting

## G13SC2(H1Z) 125mm Angle Grinder with Trigger (Deadman) Switch



4966376273867

- Powerful motor for heavy-duty applications
- Rear trigger (deadman) switch for user safety and manoeuvrability
- Three position anti-vibration handle

### Specifications

Wheel diameter	125mm
Input power	1,200W
No load speed	10,000 (min-1)
Hole diameter	22.2mm
Spindle thread	M14 x 2



Weight	2.8kg
Length	391mm
Standard accessories	Anti-vibration side handle, grinding wheel and wrench

## G18SE4(H1Z) 180mm Angle Grinder with Trigger (Deadman) Switch



4966376275960

- High-power split core motor provides less weight
- Excellent overload durability allowing the tool to maintain high load applications for longer
- Vibration-absorbing side handle
- Tool-less wheel guard
- Restart protection for improved user safety



### Specifications

Wheel diameter	180mm
Input power	2,400W
No load speed	8,500 (min-1)
Hole diameter	22.2mm

Spindle thread	M14 x 2
Weight	5.9kg
Length	492mm
Standard accessories	Anti-vibration side handle, grinding wheel and wrench

## G23ST(H1Z) 230mm Angle Grinder with Trigger (Deadman) Switch



4966376276660

- Rear trigger (deadman) switch for user safety and manoeuvrability
- Tool-less wheel guard adjustment
- Three position handle



### Specifications

Wheel diameter	230mm
Input power	2,000W
No load speed	6,600 (min-1)
Hole diameter	22.2mm

Spindle thread	M14 x 2
Weight	5.1kg
Length	469mm
Standard accessories	Side handle and wrench

## G23UDY2(H1Z) 230mm Angle Grinder with Trigger (Deadman) Switch



4966376273577

**NEW**

- High-power split core motor provides less weight
- Excellent overload durability allowing the tool to maintain high load applications for longer
- Vibration-absorbing side handle
- User Vibration Protection (UVP)
- Tool-less wheel guard
- Restart protection for improved user safety



### Specifications

Wheel diameter	230mm
Input power	2,400W
No load speed	6,600 (min-1)
Hole diameter	22.2mm

Spindle thread	M14 x 2
Weight	6.3kg
Length	500mm
Standard accessories	Anti-vibration side handle, grinding wheel and wrench

**G13BYEQ(H1Z) 125MM Angle Grinder with Paddle (Deadman) Switch****NEW**

- High performance AC Brushless Motor
- Paddle (deadman) switch for user safety
- Lightweight and slim design
- Kickback protection, restart protection and soft start control
- Brake system
- Fine Mesh filter increases dust resistance

**Specifications**

Wheel diameter	125mm
Input power	1320W
No load speed	10,000 (Min-1)
Hole diameter	22.2mm
Spindle thread	M14 x 2

Weight	2.7Kg
Length	288mm
Standard accessories	Anti-vibration side handle, and wrench

**G13SE3(H1Z) 125MM Angle Grinder with Paddle (Deadman) Switch****NEW**

- Paddle (deadman) switch for user safety
- 0-voltage restart protection
- Soft start
- Small grip circumference

**Specifications**

Wheel diameter	125mm
Input power	1,400W
No load speed	11,500 (Min-1)
Hole diameter	22.2mm

Spindle thread	M14 x 2
Weight	2.5kg
Standard accessories	Side handle and wrench

**G13SB4(H1Z) 125MM Angle Grinder with Slide Switch****NEW**

- 0-voltage restart protection
- Soft start control

**Specifications**

Wheel diameter	125mm
Input power	1,400W
No load speed	11,500 (Min-1)
Hole diameter	22.2mm

Spindle thread	M14 x 2
Weight	2.4kg
Length	288mm
Standard accessories	Side handle and wrench



## GP2S2(H1Z) 25mm Die Grinder



- High speed for better finishing applications
- Extended front housing for hard to reach areas
- All ball bearing construction for extended tool life



### Specifications

Max. wheel diameter	25mm
Collet chuck	6.35mm (standard)
Input power	520W
No load speed	29,000 (min-1)
Weight	1.7kg
Length	359mm
Standard accessories	Side handle and wrench

## GP3V(H1Z) 25mm Die Grinder



- High speed for better finishing applications
- Constant and variable speed control
- Soft start
- Extended front housing for hard to reach areas
- All ball bearing construction for extended tool life



### Specifications

Max. wheel diameter	25mm
Collet chuck	6.35mm (standard)
Input power	760W
No load speed	7,000 - 29,000 (min-1)
Weight	1.8kg
Length	406mm
Standard accessories	Side handle and wrench

## GP5V(H1Z) 50mm Die Grinder



- High speed for better finishing applications
- Constant and variable speed control
- Soft start
- Extended front housing for hard to reach areas
- All ball bearing construction for extended tool life



### Specifications

Max. wheel diameter	50mm
Collet chuck	6.35mm (standard)
Input power	760W
No load speed	2,000 - 8,300 (min-1)
Weight	1.8kg
Length	406mm
Standard accessories	Side handle and 2 x wrench

## Building on the legacy.

Guided by Japanese design principles, every element of our products is chosen to improve performance, balance, usability, longevity and control. Attention to details that ensures the professional in finishing every single job as easy as possible.

### CC14SF(6WZ) 355mm Metal Cut-Off Saw



9323624028580

- One touch vice system for quick feeding and clamping
- Spindle lock for easy wheel change
- Sturdy aluminium housing
- Spark diversion guard
- Soft grip handle
- Cuts left and right at 45°



Grinding and  
Cutting

#### Specifications

Wheel diameter	355mm	
	Bar diameter	65mm
	Pipe diameter	120mm
Capacity	130 x 115mm	
	235 x 70mm	
	195 x 100mm	
Input power	2,400W	
No load speed	3,800 (min-1)	
Weight	16.5kg	
Dimensions	318 x 603 x 603mm	
Standard accessories	8mm hex key and 6 cut off wheels	

# Reliable performance.

When you can't afford the downtime, stick with old faithful, Japanese engineered, trade grade tools.

Grinding and Cutting



## CN16SA(H1Z) 1.6mm Nibbler



- Lightweight and compact with a small grip circumference
- 3 position die holder for straight, right and left cutting
- Lockable slide switch for user comfort
- Punch and die service life: 300m of cutting into 1.6mm steel

Specifications		
Capacity	Mild steel	75mm
	Stainless	130mm
	Aluminium	110 x 110mm
Input power	400W	
No load speed	2,300 (min-1)	
Weight	1.6kg	
Length	250mm	
Standard accessories	2 x hex bar wrench	

### Recommended Service Life of Punch and Die for CN16SA


Test Condition	Service Life
1.6mm Mild Steel Plate	300m
1.6mm Mild Steel Plate (Corrugated or trapezoidal shape)	50m
1.2mm Stainless Steel Plate	200m

### Punch and Die


		Part No.	Part Name	Capacity
 Punch	 Die Assembly	998030	Punch	1.6mm
		998039	Die Assembly	



## Wheel Washers


	Part No.	Diameter	For Model	Barcode
	372737	30mm	G10SD2 / G10SQ / G10SN / G10SR3 / G10SR4	4966375309512
	937817Z	42mm	G12SE2 / G12SR3 / G13SN / G13SR3 / G13SE2 / G13SB3 / G13SR3 / G13YF / G13YA / G12SE2 / G13SE2 / G13SQ / G13YC2 / G18DBAL / G18DSL / G13SW / G12SR4 / G13SR4 / G13SS2 / G13VE	4966375447252
	937907Z	42mm	G18UBY / G23UB2 / G23UBY / G23ST / G18UDY / G23UDY	4966375447481
	937908Z	90mm	G18SE3 / G23SS / G23SE2 / G23UB2 / G18UDY / G23UDY	4966375447498
	312323	100mm	CM12Y	4966375245223

## Wheel Nuts


	Part No.	Diameter	Thread Size	For Model	Barcode
	339578	30mm	Outer M10 x 1.5	G10SQ / G10SR3 / G10SD2 / G10SN / G10SR4	4549115112247
	339579	45mm	Outer M14 x 2	G12SR4 / G13SR4 / G13SS2 / G13VE / G18DBAL / G12SR3 / G13SR3 / G13SB3 / G13YF / G13YA / G12SE2 / G13SE2 / G13SQ / G13YC2 / G18DSL / G13SW	4549115112254
	372702	40mm	Outer M14 x 2	G13BY	4549115171497
	373779	50mm	Outer M14 x 2	G13SC2 / G18SE3 / G23SE2 / G18UBY / G23UB2 / G23UBY / G23ST / G18UDY / G23UDY	4966375447504
	937917Z	90mm	Outer M14 x 2	G23SS / G18UDY / G23UDY	4966375447542
	312324	100mm	Outer	CM12Y	4966375245230

Grinding and  
Cutting


## Safety Guards

	Part No.	Type	For Model	Barcode
	331076	Standard	G10SN	4966375713302
	301948	Standard	S10SR3 / G10SQ	4966375173144
	370066	Standard	G10SR4	4549115102293
	315492	Standard	G12SR3	4966375270201
	311745	Quick Release	G12SE2	4966375240679
	338848	Standard	G12SR4	4549115099180
	319116	Standard	G13SR3 / G18DSL	4966375298588
	333840	Quick Release	G18DBAL	4966375884354
	320192	Standard	G13SB3	4966375307051
	311742	Quick Release	G13VA / G13YF / G13SE2 / G13SB3 / G13YC2 / G13SW	4966375240648
	372915		G13BY	4549115171565
	331766	Standard	G13SQ	4966375830382
	370411	Standard	G13SC2	4966375307242
	338845	Standard	G13SR4 / G13SS2	4549115099159
	321543	Quick Release	G18SE3 / G18UBY / G18UDY	4966375316961
	330036	Standard	G23SS	4966375693482
	321547	Quick Release	G23SE2 / G23UB2 / G23UBY / G23UDY	4966375317005
	338292	Standard	G23ST	4549115093379





## Dust Collectors

	Part No.	Type	For Model	Barcode
	323918	Dust Collector	G10SD2 / G10SR3 / G10SN	4966375602688
	338497	Dust Collector	G18DBAL	4549115106918




## Cutting Guard Clip

	Part No.	Type	For Model	Barcode
	372701	Cutting Guard Clip	G13BY	4549115171947


## Spanners and Wrenches

	Part No.	Type	For Model	Barcode
	313933	Pin Spanner	G10SQ / G10SR3 / G10SD2 / G13SQ / G10SN / G10SR4 / G12SR4 /	4966375123354
	711271	Pin Spanner	G12SE2 / G12SR3 / G13SR3 / G13YF / G13YA / G13YC2 / G13SB3 / G13SE2 / G13SW / G10SR4 / G12SR4 / G13SR4 / G18DBAL / G18DSL / G13SS2 / G13VE	4966375448112
	325491	Pin Spanner	G13SC2 / G18SE3 / G23SE2 / G18UBY / G23SS / G23UB2 / G23UBY / G23ST / G18UDY / G23UDY	4966375639688
	931161	Wrench 17mm and 19mm (C)	GP13	4966375439257
	951211	Wrench 17mm	CC16SA	4966375128175
	948163	Wrench 19mm and 21mm	CC16SB	4966375456254
	955857	Hex Bar	CC14SF	4966375472117
	936553	Wrench 12mm		4966375127529
	936638	Wrench 17mm		4966375128144
	332812	6mm Collet Chuck	GP2 / GP2S2 / GP3V / GP5V	4966375863007
	331422	1/4" Collet Chuck		4966375721772
	985136	1/8" Collet Chuck		4966375543763

## Side Handles

	Part No.	Type	For Model	Barcode
	302142	Standard	G10SQ / G10SD2 / G13SQ / G10SN / G10SR4 / G12SR4 / G13SR4 / G13SS2	4966375174554
	318312	Standard	G10SR3 / G12SR3 / G13SR3 / G18DSL	4966375292777
	994322	Standard	G12SE2 / G13SC2 / G13SE2 / G13SB3	4966375137009
	937981	Standard	G18SE3 / G23SS / G23SE2 / G23UB2 / G23ST	4966375447740
	336865	Anti-Vibration (Black & Grey)	G13SB3 / G13SE2 / G13SR3 / G13YF / G13VA / G13YC2 / G13SW / G18DBAL / G13VE / G13BY	4549115066359
	336864	Anti-Vibration (Black & Grey)	G18SE3 / G18UBY / G23SE2 / G23UB2 / G23UBY / G18SE3 / G18UBY / G23SE2 / G23UB2 / G23UBY / G18UDY / G23UDY	4549115066472

## Rubber Pads

	Part No. (Pad)	Part No. (Nut)	Pad Size	Thread	Barcode
	936558Z	935513	100mm	M10 x 1.5	4966375446521
	753806	937826Z	115mm	M14 x 2	4966375447269
	953247Z	953246Z	180mm	M14 x 2	4966375869653





# 06 Polishing and Sanding



## Quick Reference Guide for Sanding and Polishing

Model	Type	Sheet / Pad Size (mm)	Input Power (W)	No Load Speed (min-1)	Dust Collection	Weight (kg)
SV12SG(H1Z)	Orbital Sander	110 x 100	200	14,000	•	1.1
FSV10SA(H1Z)	Orbital Sander	92 x 184	160	10,000	•	1.3
SV13YA(H1Z)	Random Orbital	125	230	7,000 - 12,000	•	1.4
SV15YC(H1Z)	Random Orbital	150	350	4,200 - 11,000	•	2.5
SB8V2(H1Z)	Belt Sander	76 x 533	1,020	250 - 450	•	4.3
SP18VA(H1Z)	Sander / Polisher	180	1,250	0 - 600 / 0 - 3,400		2.8

### SV12SG(H1Z) ¼ Sheet Orbital Palm Sander



4966376279548

- Large soft grip for ease of use and allows motor ventilation
- Hook and loop base with additional clamps allows use of standard or hook and loop paper
- Excellent dust collection with standard dust bag
- Ideal for close edge work

#### Specifications

Pad size	110 x 100mm
Input power	200W



No load speed	14,000 (min-1)
Orbital diameter	1.5mm
Weight	1.1kg
Length	137mm
Standard accessories	Sanding paper and dust bag

### FSV10SA(H1Z) ⅓ Sheet Orbital Sander



4966376298549

- Large soft grip for ease of use and allows motor ventilation
- Hook and loop base with additional clamps allows use of standard or hook and loop paper
- Excellent dust collection with standard dust bag
- Ideal for close edge work

#### Specifications

Pad size	92 x 184mm
Input power	160W



No load speed	Spindle	10,000 (min-1)
	Orbit	20,000 (min-1)
Orbital diameter	2mm	
Weight	1.3kg	
Length	184mm	
Standard accessories	Sanding paper, punch plate and dust bag	

### SV13YA(H1Z) 125mm Random Orbital Sander with Variable Speed



4966376279838

- Random orbit sanding action for smooth finishes
- Large soft grip for ease of use and allows motor ventilation
- Variable speed and stable speed control to suit multiple applications
- Hook and loop base
- Excellent dust collection with standard dust bag

#### Specifications

Pad size	125mm
Input power	230W
No load speed	7,000 - 12,000 (min-1)



Orbital diameter	3.2mm
Weight	1.4kg
Length	145mm
Standard accessories	Sanding paper, dust bag and carry case

## SV15YC(H1Z) 150mm Random Orbital Sander with Variable Speed



4966376280131

- Adjustable dual orbit diameter enables the orbit to be changed between 2.8mm and 6.2mm for greater sanding versatility
- TurboBoost switch
- Variable speed dial to suit multiple applications
- Hook and loop base
- Excellent dust collection with standard dust bag



### Specifications

Pad size	150mm
Input power	350W
No load speed	4,200 - 11,000 (min-1)
Orbital diameter	2.8mm / 6.2mm
Weight	2.5kg
Length	173mm
Standard accessories	Front handle, sanding paper, dust bag and hex bar wrench

## SB8V2(H1Z) 76mm Belt Sander



4966376296736

- Variable speed dial to suit multiple applications
- Visible sanding position through transparent cover
- Suitable for close edge work due to design
- Excellent dust collection with standard dust bag



### Specifications

Belt size	76 x 533mm
Input power	1,020W
No load speed	250 - 450 (min-1)
Weight	4.3kg
Length	318mm
Standard accessories	Sanding belt and dust bag

SP18VA(H1Z) 180mm Sander Polisher









- Variable speed dial to suit multiple applications
- Soft start to prevent kickback upon start up
- Overload protection control to extend tool life




Specifications			Spindle thread	M14 x 2
Wheel diameter	180mm		Weight	1.3kg
Input power	1,250W		Length	415mm
No load speed	Low	0 - 600 (min-1)	Standard accessories	Loop handle, rubber pad, wool bonnet, sanding disc and wrench
	High	0 - 3,400 (min-1)		

Sander & Polisher Attachments

	Part No.	Description	Diameter (mm)	Comments	For Model	Barcode
	953247Z	Rubber Pad	180	Rigid	SAT180 SP18VA	4966375468653
	949103 + 753822	Wool Bonnet	180	-	SAT180 SP18VA	4966375107057
	753817	Backing Pad	150	Hook & Loop	SAY150A	8717574033823
	324209	Backing Pad	125	Hook & Loop	SV13YA SV13YB	4966375621577
	309419	Backing Pad	125	Hook & Loop	FSV13Y	4966375222699
	753852	Backing Pad	150	Hook & Loop	SV15YC	4549115159198

Dust Bags

	Part No.	For Model	Barcode
	310339	FSV10SA / SV12SH / SV12SG / SV13Y B / SV13YA	4966375229445
	300177	SV12SD	4966375165149
	323011	SB8V2 / SB10V2	4966375328575
	371871	SV15YC	4549115159228



# 07 Sawing





## Quick Reference Guide for Circular Saws

Model	Blade Diameter (mm)	Max. Cutting Depth (mm)	Input Power (W)	No Load Speed (min-1)	Dust Collection Capable	Base Material	Weight (kg)
C7UR(H6Z)	185	60	1,800	6,800	•	Aluminium	5.1
C7YA(FCBZ)	185	60	1,400	5,500	•	Aluminium	4.9
C7MFA(H6Z)	190	68	1,010	5,500	•	Aluminium	3.6
C9SA3(H6Z)	235	86	2,000	5,200	•	Aluminium	7.0

### C7UR(H6Z) 185mm Circular Saw



- Heavy-duty high speed motor for faster cutting
- Reinforced aluminium base for increased strength
- Integrated blower removes sawdust from the cutting line
- Includes hard carry case for transport and storage plus 2 x TCT blades for added value

Specifications		
Capacity	Max. cut depth 90°	60mm
	Max. cut depth 45°	47mm
	Max. cut depth 55°	38mm
Input power	1,800W	
No load speed	6,800 (min-1)	
Blade diameter	185mm	
Blade bore	20mm	
Weight	5.1kg	
Length	308mm	
Standard accessories	2 x TCT blades, wrench, guide and carry case	



### C7MFA(H6Z) 190mm Circular Saw



- Strong and lightweight for increased durability and user comfort
- Die-cast aluminium base for increased strength
- Takes both 185mm and 190mm blades for added versatility
- Includes 2 x TCT blades for added value

Specifications		
Capacity	Max. cut depth 90°	68mm
	Max. cut depth 45°	47mm
Input power	1,010W	
No load speed	5,500 (min-1)	
Blade diameter	190mm & 185mm	
Blade bore	20mm	
Weight	3.6kg	
Length	291mm	
Standard accessories	2 x TCT blades, wrenches and guide	



## C9SA3(H6Z) 235mm Circular Saw



- Heavy-duty high speed motor for faster cutting
- Die-cast aluminium base for increased strength
- Integrated blower removes sawdust from the cutting line
- Low noise and vibration
- Includes 2 x TCT blades for added value



### Specifications

Capacity	Max. cut depth 90°	86mm
	Max. cut depth 45°	65mm
Input power	2,000W	
No load speed	5,200 (min-1)	
Blade diameter	235mm	
Blade bore	25mm	
Weight	7kg	
Length	397mm	
Standard accessories	2 x TCT blades, side handle, dust port, short lever, 6mm wrench and guide	

## C10RJ(H1Z) 254mm Table Saw



**NEW**

- Equipped extension support table to cut long material
- Folding stand and wheel for compact storage
- Soft start and electric brake (stops after 3 seconds after being switched off)
- Large rip moving range in its classes with a maximum cutting width of 889mm
- High power 15A motor for easier cutting of hard wood



### Specifications

Input	15
Motor size	95 x 50
Blade Diameter	10" (255mm)
No Load Speed	4,500 (min 1)
Table Size	633mm (28 3/4" x 22")
Stand Type	Folding + w/c caster
Vibration	10.5 (m/s 2)
Dimensions (L x W x H)	920 x 770 x 600
Weight	44kg
Standard accessories	1 x TCT blade, push stick, wrenches and guide




**C10FCE2(H1Z) 255mm Compound Mitre Saw**

4966376290444

- Large 280mm base provides stable cutting
- Large fence height increases job stability and safety
- Electronic brake for increased user safety
- Positive mitre stops for quick and easy adjustment
- D handle for ergonomical cutting action
- Lightweight for easy transportation

**Specifications**

Capacity	Mitre angle	0 - 52° left & right
	Bevel angle	0 - 45° left
	Positive mitre angle stop	0, 15, 22.5, 31.6, 45°
Input power	1,520W	
No load speed	5,000 (min-1)	
Blade diameter	255mm	
Blade bore	25.4mm	
Weight	11.9kg	
Dimensions	460 x 628 x 561mm	
Standard accessories	Blade, dust bag, vice assembly, 30mm washer and box wrench	

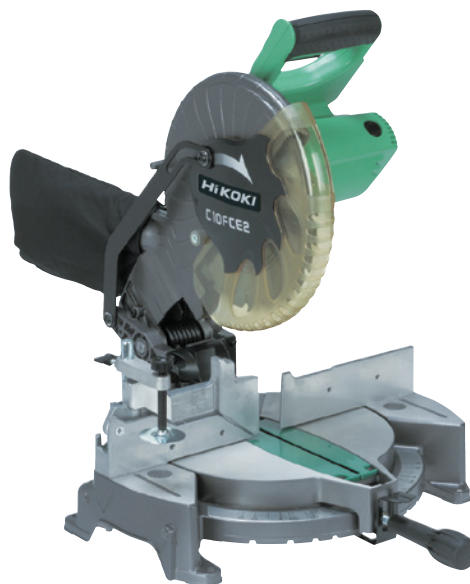**Maximum Cutting Capacity for C10FCE2**

0° (Right angle)	59mm x 114mm
	89mm x 101mm
Mitre right / left 45°	59mm x 102mm
	89mm x 70mm
Mitre right / left 52°	59mm x 89mm
	89mm x 54mm
Bevel left 45°	41mm x 144mm
Mitre right / left 45° + Bevel left 45°	41mm x 102mm

**C8FSE(H1Z) 216mm Slide Compound Mitre Saw**

4966376293070

- Dual linear ball bearings guide the slide for superior accuracy
- Die cast base with turn table for increased durability
- Positive mitre stops for quick and easy adjustment
- Quick change depth adjustment guide
- Lightweight for easy transportation

**Specifications**

Capacity	Mitre angle	0 - 45° left & 0 - 57° right
	Bevel angle	0 - 48° left & 0 - 5° right
	Positive mitre angle stop	0, 15, 22.5, 31.6, 45°
Input power	1,050W	
No load speed	5,500 (min-1)	
Blade diameter	216mm	
Blade bore	30mm	
Weight	14kg	
Dimensions	555 x 790 x 485mm	
Standard accessories	Blade, dust bag, vice assembly and wrench	

**Maximum Cutting Capacity for C8FSE**

0° (Right angle)	65mm x 312mm
	75mm x 262mm
Mitre right / left 45°	65mm x 220mm
	75mm x 185mm
Mitre right 57°	65mm x 170mm
	75mm x 140mm
Bevel left 45°	45mm x 312mm
	50mm x 252mm
Bevel right 5°	60mm x 312mm
	70mm x 252mm
Mitre right / left 45° + Bevel left 45°	45mm x 220mm
	50mm x 170mm
Mitre right / left 45° + Bevel right 5°	60mm x 220mm
	70mm x 170mm

# We take pride in our heritage.

70 years of Japanese technological knowledge, skills and experience is what we're most proud of. We develop products that will make even the toughest job as easy and comfortable as possible.



## C10FSB(H1Z)

### 255mm Slide Compound Mitre Saw



4966376290659

- Poly v-belt and motor driving system for longer service life
- Soft start to reduce recoil force during motor start up
- Electronic constant speed control
- Positive mitre stops for quick and easy adjustment

#### Specifications

Capacity	Mitre angle	0 - 45° left & 0 - 57° right
	Bevel angle	0 - 45° left & right
	Positive mitre angle stop	0, 15, 22.5, 31.6, 45°
Input power	1,450W	
No load speed	3,800 (min-1)	
Blade diameter	262mm	
Blade bore	25.4mm	
Weight	19.5kg	
Dimensions	525 x 1050 x 615mm	
Standard accessories	Blade, dust bag, vice assembly, and wrench	

#### Maximum Cutting Capacity for C10FSB

0° (Right angle)	88mm x 312mm
	91mm x 300mm
Mitre right / left 45°	88mm x 218mm
	91mm x 200mm
Mitre right 57°	88mm x 165mm
	91mm x 150mm
Bevel left 45°	55mm x 305mm
	60mm x 290mm
Bevel right 45°	30mm x 305mm
	35mm x 290mm
Mitre right / left 45° + Bevel left 45°	55mm x 218mm
	60mm x 200mm
Mitre right / left 45° + Bevel right 45°	30mm x 218mm
	35mm x 200mm

**FCJ65V3(H1Z) 65mm Jig Saw**

- Variable speed by dial and trigger
- Soft grip handle for user comfort
- Dust blower provides a clear view over the cutting line
- Connectable to a dust collector without adapter

**Specifications**

	Wood	65mm
Capacity	Mild steel plate	6mm
	Min. cutting radius	25mm
Input power	400W	
No load speed (strokes)	0 - 3,000 (min-1)	
Length of stroke	18mm	
Base tilt angle	45° left & right	
Weight	1.5kg	
Dimensions	197mm	
Standard accessories	Blade, splinter guard, chip cover and hex key	

**CJ90VST(H1Z) 90mm Jig Saw**

- 4-mode orbital action to suit multiple cutting applications
- Variable speed by dial and trigger
- Dust blower provides a clear view over the cutting line
- Tool-less blade change


**Specifications**

	Wood	90mm
Capacity	Mild steel plate	8mm
	Min. cutting radius	25mm
Input power	400W	
No load speed (strokes)	850 - 3,000 (min-1)	
Length of stroke	20mm	
Base tilt angle	45° left & right	
Weight	2.2kg	
Dimensions	228mm	
Standard accessories	Blade, hex bar wrench and carry case	







## Flanges

	Part No.	Type	For Model	Barcode
	317465	Inner	C18DL / C18DSL	4966375285403
	324563	Outer		4966375621188
	338915	Inner	C18DBAL / C6MEY	4549115101388
	338916	Outer		4549115101395
	333666	Inner	C18DBL	4966375880448
	333665	Outer		4966375880431
	302444	Inner	C7YA	4966375176527
	302423	Outer		4966375176329
	321639	Inner	C7SB2 / C7UR	4966375317784
	320953	Outer		4966375312604
	322099	Inner	C6SS / C6MFA / C7MFA	4966375321415
	323924	Outer		4966375602729
	303365	Inner	C9SA2 / C9BA2	4966375182757
	302423	Outer		4966375176329
	370273	Inner	C9SA3	4549115127951
	370279	Outer		4549115128019
	330985	Inner	C7UY	4966375710516
	330986	Outer		4966375710523

## Wrenches

	Part No.	Type	For Model	Barcode
	940543	Box Wrench 10mm	C18DL / C18DSL / C6MFA / C7MFA / C7UY / C6MEY	4966375127963
	990666	Hex Bar 2.5mm	C18DBL / C18DBAL / C6MEY	4966375559900
	944458	Hex Bar 4mm	C18DBL	4966375453895
	944459	Hex Bar 5mm	C18DBAL	4966375453901
	957683	Wrench 10mm & 13mm	C7SB / C7SB2 / C8 / C7YA	4966375477020
	872422	Hex Bar 6mm	C7UR / C9SA2 / C9BA2 / C9SA3	4966375404033
	944459	Hex Bar Wrench 5mm	C6SS	4966375453901

## Guides

	Part No.	For Model	Barcode
	302756	C6SS / C6MFA / C7MFA / C18DL / C18DBL / C18DBAL / C18DSL / C7UY / C6MEY	4966375178651
	962175	C18DBAL	4966375485629
	302691	C7SB / C7SB2 / C7YA / C7UR	4966375116448
	303888	C9SA2 / C9BA2 / C9SA3	4966375186366

## Side Handles



Part No.	For Model	Barcode
303811	C9SA2 / C9BA2 / C9SA3	4966375185826
338934	C18DBAL	4549115101562

## Dust Extractor Adaptors



Part No.	For Model	Barcode
324580	C18DL / C18DSL	4966375621348
302981	C6SS / C6MFA / C7MFA	4966375180319
329063	C18DBL	4966375679929
339383	C18DBAL / C6MEY	4966375681694
302690	C7SB	4966375178170
324669	C9SA2 / C9BA2	4966375628361
319297	C7YA	4966375300076
372757	C7UR	4549115164963
997247	C7UY / C9SA3	4966375579076
337936	CV350V	4549115088436

## Circular Saw Dust Bag



Part No.	For Model	Barcode
319296	C7YA	4966375300069

## Vice Assembly



Part No.	For Model	Barcode
322952	C10FCE2 / C10FCH2	4966375328063
324378	C12LSH / C12RSH	4966375619185
329860	C8FSE / C8FSHE	4966375687351
321370	C10FSB / C10FSH	4966375316176
339624	C12RSH2	4549115112711

## Mitre Saw Dust Bags



Part No.	For Model	Barcode
998845	C10FSB / C10FSH	4902530120110
322955	C8FSE / C8FSHE / C10FCE2 / C10FCH2 / C12LCH / C12LSH / C12RSH / C12RSH2	4966375328087


## Extension Guide Assembly



Part No.	For Model	Barcode
321553	C8FSE / C8FSHE / C10FSB / C10FSH	4966375317067
322956	C10FCE2 / C10FCH2	4966375328094
324369	C12LSH / C12RSH / C12RSH2	4966375621669



# 08 Planing and Routing

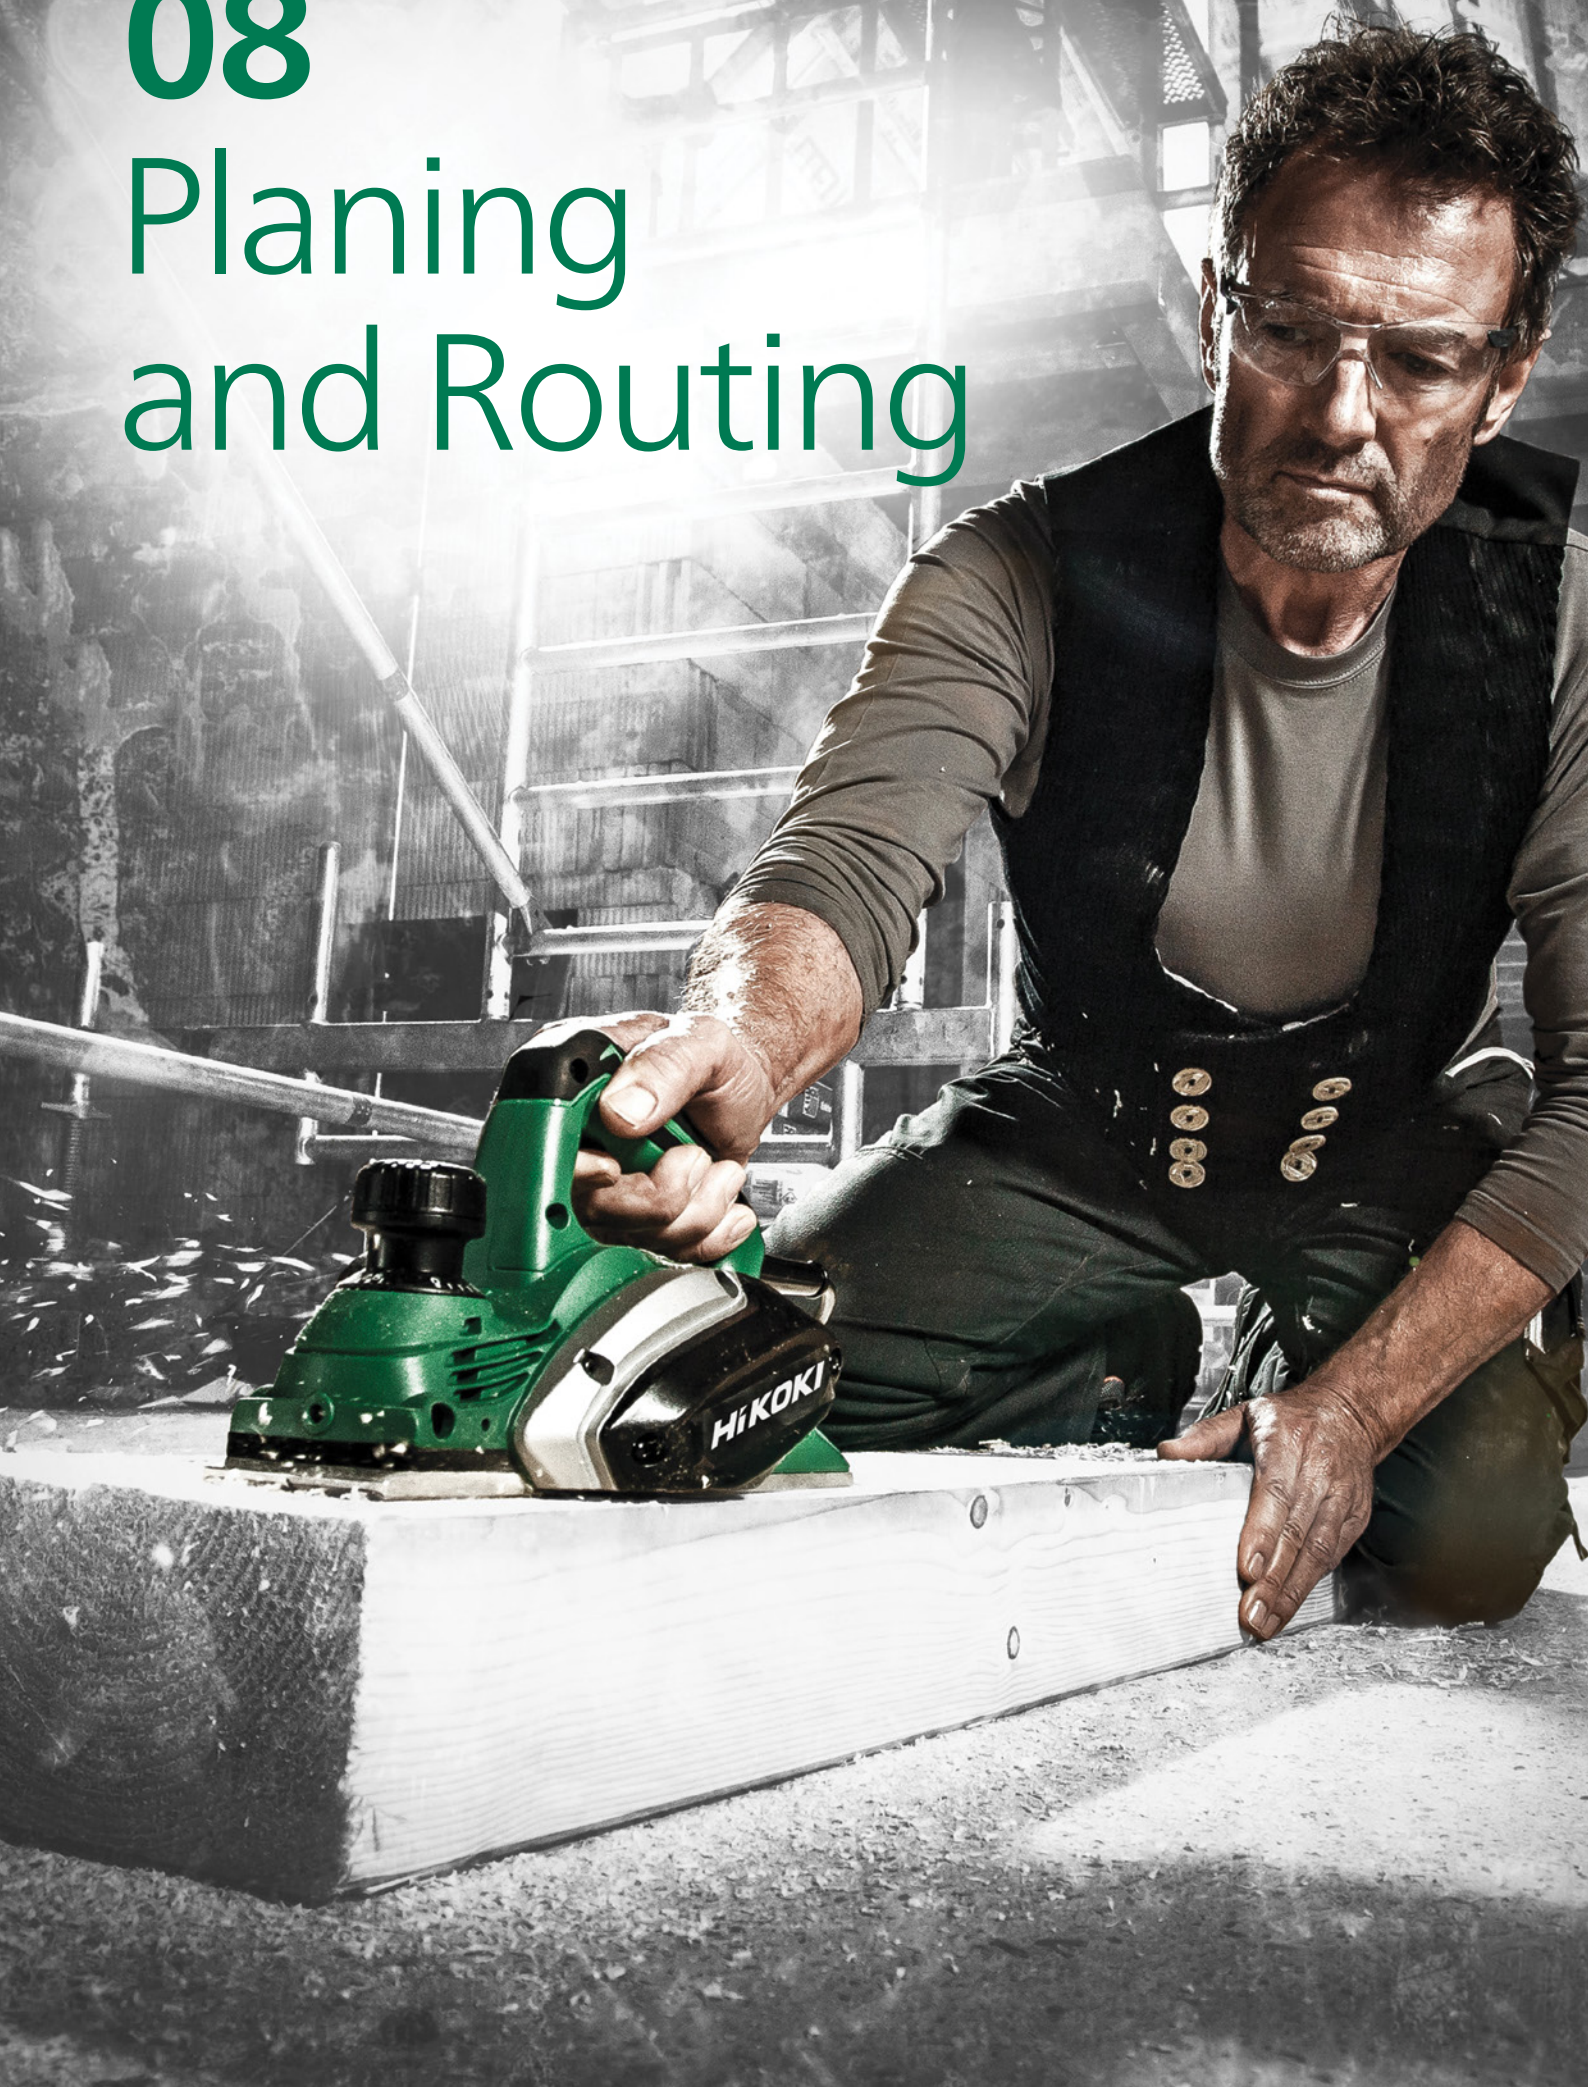



P20ST(H1Z) 82mm Rebate Planer



- Lightweight and compact
- Maximum rebating depth of 9mm
- Able to be connected to dust extraction equipment



Specifications

Input power	580W
No load speed	17,000 (min-1)
Blade type	82mm
Max. cutting width	82mm

Max. cutting depth	1.5mm
Weight	2.5kg
Length	296mm
Standard accessories	Blades, blade setting gauge, guide and wrench

P20SF(H1Z) 82mm Rebate Planer



- Lightweight and compact
- Heavy-duty aluminium housing
- Maximum rebating depth of 9mm
- Able to be connected to dust extraction equipment
- Blade protection stand to protect the blade from catching when placing the tool down



Specifications

Input power	620W
No load speed	17,000 (min-1)
Blade type	82mm
Max. cutting width	82mm
Max. cutting depth	2.6mm

Weight	2.5kg
Length	296mm
Standard accessories	Blades, blade setting gauge, guide, wrench and carry case

Planer Blades



Length (mm)	Description	Part No.	Barcode
82	2 x reversible TCT blades	750470	8717472818812
82	10 x reversible TCT blades	750471	8717472818829
82	2 x HSS planer blades (for P20SB HSS model only)	750473	8717472818843
330	1 x HSS blade (22mm wide for P13F)	328935	9323624015917
330	1 x HSS blade (12mm narrow for P13F)	726341	9323624004386

# High Performance Power Tools.

Our brand name is new, but our company isn't. We've been developing innovative technologies for over 70 years. We are proud of our achievements and our contribution to the Australian woodworking industry.



Planing and  
Routing

## M12SE(H1Z) 12.7mm (1/2") Router



4966376294947

- Lightweight and compact
- Angle adjustable handles for improved handling
- Height adjustable cutting scale for increased accuracy

### Specifications

Collet chuck	12.7mm (1/2")
Input power	1,700W
No load speed	22,000 (min-1)
Main body stroke	65mm
Weight	5.3kg
Standard accessories	Straight guide, template guide and wrench



The MultiVolt series

**AC power.  
DC freedom.**



A new generation battery system (BSL36A18), with almost the same size and weight as our 18V 5.0Ah/6.0Ah battery, but it's the technology inside that provides you with the great improvements you need. Doubling voltage provides the optimal power for the MultiVolt 36V tools, without the hassle of cords. The MultiVolt batteries are compatible with a wide range of 18V cordless tools, which means you can easily switch from one power tool to another. So you're just a simple click away from maximum performance.

**HiKOKI**  
HIGH PERFORMANCE POWER TOOLS





# 09 Air Displacement



RH600T(H1Z) Heat Gun



- Two position switch controls high/low air volume and temperature controls
- Convenient quick cooling button delivers a shot of cool air for cooling down materials
- Built in thermal cut-out protects the tool from damage due to overheating



Specifications		
Input power	2,000W	
Air volume	Low	250 l/min
	High	500 l/min
Air temperature	Low	450°C
	High	600°C
Quick cooling button	Yes - 50°C	
Weight	0.57kg	
Dimensions	245 x 83 x 250mm	
Standard accessories	Round nozzle, flat nozzle, curved surface nozzle, glass protector nozzle, scraper with grip and carry case	

RH650V(H1Z) Heat Gun with LCD Display



- Variable temperature and air flow buttons allow precise settings
- LCD display indicates temperature and air volume settings
- Built in thermal cut-out protects the tool from damage due to overheating



Specifications		
Input power	2,000W	
Air volume	Low	250 - 500l/min
	High	250 - 500l/min
Air temperature	Low	50°C
	High	50 - 650°C
LCD display	Yes	
Weight	0.79kg	
Dimensions	245 x 85 x 254mm	
Standard accessories	Round nozzle, flat nozzle, curved surface nozzle, glass protector nozzle, scraper with grip and carry case	

Air Displacement

## RP250YDL(H1Z) 25L Wet & Dry Vacuum



4966376280940

**NEW**

- Auto power function allows the vacuum unit power to turn on and off when tool is in use
- Equipped with Class L filter capable of collecting over 99% of dust from 0.2 to 2-µm
- PressClean system allows the filter surface to be cleaned at the press of a button to optimise suction
- Built in overload protection
- Includes both PE and fleece filters

### Specifications

Tank Capacity	25L	
Suction capacity	Solid	21L
	Liquid	18L
Input power	1,000W	
Auto outlet	1,400W	
Filtration rating	Class L	
Max. vacuum pressure	21kPa	
Max. air flow	3.6 (m3/min)	
Hose (ID x length)	32mm x 3.5m	
Weight	7.8kg	
Dimensions	374 x 392 x 550mm	
Standard accessories	3.5m suction hose, 2 x pipes, floor nozzle set, crevice nozzle, suction nozzle, round brush nozzle, adaptor, pipe holder, PE filter bag, fleece filter bag and hook	



## RP300YDL(H1Z) 30L Wet & Dry Vacuum



4966376281039

**NEW**

- Stainless steel canister for increased durability
- Auto power function allows the vacuum unit power to turn on and off when tool is in use
- Equipped with Class L filter capable of collecting over 99% of dust from 0.2 to 2-µm
- PressClean system allows the filter surface to be cleaned at the press of a button to optimise suction
- Built in overload protection
- Includes both PE and fleece filters

### Specifications

Tank Capacity	30L	
Suction capacity	Solid	26L
	Liquid	23L
Input power	1,000W	
Auto outlet	1,400W	
Filtration rating	Class L	
Max. vacuum pressure	21kPa	
Max. air flow	3.6 (m3/min)	
Hose (ID x length)	32mm x 3.5m	
Weight	9.2kg	
Dimensions	391 x 398 x 658mm	
Standard accessories	3.5m suction hose, 2 x pipes, floor nozzle set, crevice nozzle, suction nozzle, round brush nozzle, adaptor, pipe holder, PE filter bag, fleece filter bag and hook	



Air  
Displacement



Dust Extractor Dust Bag (5 Pcs)	Hose 32mm I.D. Standard Accessory	Joint Optional Accessory	Dust Collection Adaptor Optional Accessory	Applicable Power Tool
RP250YDL 	3.2m 782232 5.0m 782233 		Part No. 339729 	Rotary hammers 
			Part No. 783121 	Demolition hammers 
		Part No. 783104  Part No. 783102, 783103 	Disc grinders 	
		Part No. 963558 	Part No. 328740 	
			Part No. 339382 	Orbital Sanders 
	Part No. 339380  Part No. 339381 		Belt Sanders 	
	Part No. 339380  Part No. 339381 		Routers 	
	Part No. 324669 		Circular Saws 	
	Coming Soon 		Jig Saws 	
RP300YDL 		Part No. 963558 	Part No. 334502  Part No. 317279 	Planers 
			Part No. 339236 	Orbital Sanders  Random Orbital Sanders 
			Part No. 339237 	Slide Compound Mitre Saws 

# 10 Outdoor Power Equipment





AW130(H1Z) 1885psi High Pressure Washer



- Automatic start/stop reduces motor & pump wear
- Durable corrosion free metal pump
- Built in thermal protector stops the motor when abnormal heat is detected
- Siphon function can draw water from a bucket
- Handle & wheels for easy transportation & manoeuvrability

Specifications	
Max. pressure	1,885psi / 130bar
Flow rate	6L/min
High pressure hose length	10m
Permissible water temp.	40°C or less
Input power	1,600W
Power cord length	5m
Weight	8.3kg
Standard accessories	Trigger gun, high pressure hose (10m), variable nozzle spray lance, turbo nozzle spray lance, detergent bottle with nozzle, one touch hose connector joint, water feed connector, nozzle cleaning pin, cord holder, trigger gun holder and top handle



AW150(H1Z) 2175psi High Pressure Washer









- Automatic start/stop reduces motor & pump wear
- Durable corrosion free metal pump
- Built in thermal protector stops the motor when abnormal heat is detected
- Siphon function can draw water from a bucket
- Integrated hose reel with winder
- Handle & wheels for easy transportation & manoeuvrability

Specifications	
Max. pressure	2,175psi / 150bar
Flow rate	6L/min
High pressure hose length	10m
Permissible water temp.	40°C or less
Input power	2,000W
Power cord length	5m
Weight	12.4kg
Standard accessories	Trigger gun, high pressure hose (10m), variable nozzle spray lance with pressure adjuster, turbo nozzle spray lance, on board detergent bottle, one touch hose connector joint, water feed connector, nozzle cleaning pin, trigger gun holder, hose winder handle and trigger gun support





	Part No.	Description	For Model	Barcode
	335651	Wash Brush	AW100 / AW130 / AW150	4549115035584
	335652	Rotating Brush	AW100 / AW130 / AW150	4549115035591
	335657	10m High Pressure Extension Hose	AW100 / AW130 / AW150	4549115035621
	336412	Patio Cleaner	AW100 / AW130 / AW150	4549115057869
	336413	Rotary Angle Nozzle	AW100 / AW130 / AW150	4549115057876
	336414	Angle Nozzle 315 Degree	AW100 / AW130 / AW150	4549115057883

## CG36DA(H4Z) 36V Cordless Trimmer

Available Naked Only



4966376331659

**NEW**

- Longer run time per charge
- Brake mechanism stops the rotation of the head
- Coreless disc motor improves motor output, minimises heat and noise

\*1: Time will vary depending on grass type, temperature, battery condition. This is a guide only.



### Specifications

Motor	Disc
Battery Voltage	DC 36V (MultiVolt type)
Cutting capacity (diameter)	310mm
Cutting tool	Nylon head
No-load speed	5,800 to 7,000 min-1
Speed type	Variable dial
Run Time per charge*1	18min (high), 42min (normal) with BSL36A18
Main pipe	Single
No-load vibration level	4.0m/s <sup>2</sup>
No-load noise level	72dB (A)
Charging Time	32mins
Dimensions (L x H x W)	1,885 x 630 x 555mm
Weight	5.8kg (inc. battery)

## CH3656DA(H4Z)

### 36V Cordless Hedge Trimmer

Available Naked Only



4966376331666

**NEW**

- Longer run time per charge due to high efficiency brushless motor
- Uses the new MultiVolt battery which can be switched with 18V and 36V automatically
- Triple edge blade ensures a fine cut



### Specifications

Battery Voltage	DC 36V (MultiVolt type)
Blade length	560mm
No-load vibration level	4.3m/s <sup>2</sup>
No-load noise level	72dB (A)
Number of strokes	1,000 to 1,500 min-1
Speed control	4 stage (button type)
Carbon brush	Built-in
Blade assembly	Triple-edged x 2
Charging Time	32mins
Run Time	62.5 to 105min (depending on operation)
Dimensions (L x H x W)	1088 x 176 x 239mm
Weight	4.1kg (inc. battery)

## CS3630DA(H4Z) 36V Cordless Chain Saw

Available Naked Only



4966376331673

**NEW**

- Longer run time per charge due to high efficiency brushless motor
- Uses the new MultiVolt battery which can be switched with 18V and 36V automatically
- Triple edge blade ensures a fine cut



### Specifications

Battery Voltage	DC 36V (MultiVolt type)
Guide bar length	300mm
Chain speed	8.3m/s
Type of chain	91PX 45E (Oregon)
Cut per charge*1	190 cuts
Chain adjuster	Toolless
Vibration level under load	5.0m/s <sup>2</sup>
Noise level under load	87dB (A)
Carbon brush	Built-in
Spike	Steel
Charging Time	32mins
Dimensions (L x H x W)	599 x 214 x 256mm
Weight	4.3kg (inc. battery)

\*1: When cutting 50mm x 50mm cedar timber

## RB36DA(H4Z) 36V Brushless Blower

Available Naked Only



4966376331680

**NEW**

- Powerful air volume
- 4 mode switch and turbo mode
- Compact and well-balanced



### Specifications

Speed (min-1)	Mode 1	0 - 14,000
	Mode 2	0 - 16,500
	Mode 3	0 - 18,500
	Mode 4	0 - 20,500
	Turbo Mode	0 - 24,000

Air Volume (m <sup>3</sup> /hr)	Mode 1	0 - 460
	Mode 2	0 - 560
	Mode 3	0 - 630
	Mode 4	0 - 680
	Turbo Mode	0 - 800
Air Velocity (m/s)	Mode 1	0 - 30
	Mode 2	0 - 36
	Mode 3	0 - 40
	Mode 4	0 - 45
	Turbo Mode	0 - 53
Weight	3.5kg (with BSL36A18 battery and round nozzle)	
Dimensions (L x W x H)	318 x 204 x 267mm	
Battery type (sold separately)	Compatible with HiKOKI MultiVolt batteries	
Standard accessories	Round nozzle	



# 11 Accessories





Item Number	Description	Box qty	Inners per carton	Suits
C1 Series Nailers & 18G/C1 Series Collated Brads				
H18EG16	16mm x 18Ga Straight Electro Galvanised Finish Nails	5000	12	HiKOKI/Hitachi NT1850DBSL, NT50AE2 and other C1 Series Brad Nail Guns
H18EG19	19mm x 18Ga Straight Electro Galvanised Finish Nails	5000	12	
H18EG25	25mm x 18Ga Straight Electro Galvanised Finish Nails	5000	12	
H18EG32	32mm x 18Ga Straight Electro Galvanised Finish Nails	5000	12	
H18EG38	38mm x 18Ga Straight Electro Galvanised Finish Nails	5000	12	
H18EG45	45mm x 18Ga Straight Electro Galvanised Finish Nails	5000	12	
H18EG50	50mm x 18Ga Straight Electro Galvanised Finish Nails	5000	12	
C Series Nailers & 16G/C Series Collated Brads				
H16EG25	25mm x 16Ga Straight Electro Galvanised Finish Nails	5000	6	HiKOKI/Hitachi NT1865DBSL, NT65M2 and other C Series Finish Nail Guns
H16EG32	32mm x 16Ga Straight Electro Galvanised Finish Nails	5000	6	
H16EG38	38mm x 16Ga Straight Electro Galvanised Finish Nails	5000	6	
H16EG45	45mm x 16Ga Straight Electro Galvanised Finish Nails	5000	6	
H16EG50	50mm x 16Ga Straight Electro Galvanised Finish Nails	5000	6	
H16EG64	64mm x 16Ga Straight Electro Galvanised Finish Nails	5000	6	
DA Series Nailers & 15G/DA Series Collated Nails				
H15B32	32mm x 15Ga Angle Bright Nails	3000	4	HiKOKI/Hitachi NT1865DBAL, NT65MA4 and other DA Series Finish Nail Guns
H15B38	38mm x 15Ga Angle Bright Nails	3000	4	
H15B45	45mm x 15Ga Angle Bright Nails	3000	4	
H15B50	50mm x 15Ga Angle Bright Nails	3000	4	
H15B64	64mm x 15Ga Angle Bright Nails	3000	4	
H15EG32	32mm x 15Ga Angle Electro Galvanised Nails	3000	4	
H15EG38	38mm x 15Ga Angle Electro Galvanised Nails	3000	4	
H15EG45	45mm x 15Ga Angle Electro Galvanised Nails	3000	4	
H15EG50	50mm x 15Ga Angle Electro Galvanised Nails	3000	4	
H15EG64	64mm x 15Ga Angle Electro Galvanised Nails	3000	4	
Framing Nailers & 34° D Head Collated Framing Nails				
HFB50	50MM D-HEAD 34° SMOOTH SHANK BRIGHT	3000	1	HiKOKI/Hitachi NR1890DBCL, NR90AD and other 34° Framing Nail Guns
HFB75	75MM D-HEAD 34° SMOOTH SHANK BRIGHT	3000	1	
HFB90	90MM D-HEAD 34° SMOOTH SHANK BRIGHT	3000	1	
HFG50	50MM D-HEAD 34° SMOOTH SHANK Electro Galvanised	3000	1	
HFG75	75MM D-HEAD 34° SMOOTH SHANK Electro Galvanised	3000	1	
HFG90	90MM D-HEAD 34° SMOOTH SHANK Electro Galvanised	3000	1	
COLLATED COIL NAILER & CONCRETE COLLATED NAILS				
CV2965	65mm X 11Ga(2.9mm) Concrete Nails, Zinc	540	1	Hitachi NC65AC
CV3838	38mm X 9Ga (3.8mm) Concrete Nails, Zinc	540	1	
CV3850	50mm X 9Ga (3.8mm) Concrete Nails, Zinc	540	1	
CV3865	65mm X 9Ga (3.8mm) Concrete Nails, Zinc	540	1	
Stapler & Staples				
750667	22Ga 1/2" (12.8mm) Staple	4800	1	HiKOKI/Hitachi N18DSL,
750668	22Ga 1/2" (12.8mm) Staple	4800	1	
750669	22Ga 1/2" (12.8mm) Staple	4800	1	

**NEW**



## Drilling and Driving

### 102 Piece Drill and Driver Bit Set



Bull Point

Cold Chisel

Description	Product Code	Barcode
Suitable accessories for metal, wood, plastic and masonry applications.		
Set includes:		
<ul style="list-style-type: none"> <li>Magnetic insert bit holder: 60mm length, 1/4 hex, zinc chrome plated steel</li> <li>12.7mm countersink: 1/4" hex</li> <li>Drill bits: HSS black oxide: 1mm (5), 1.5mm (5), 2mm (4), 3mm, 3.5mm, 4mm, 4.5mm, 5mm, 6mm</li> <li>Masonry bits: carbide tip – 3mm, 4mm, 5mm, 6mm</li> <li>50mm insert bits: 1/4" hex – PH1, PH2, PH3, PZ 1, PZ 2, PZ 3, TX 20, TX 25</li> <li>25mm insert bits: 1/4" hex – PH0 (3), PH1 (4), PH2 (8), PH3 (4), PZ 1 (3), PZ 2 (5), PZ 3 (3), 3 slot (3), 4 slot (3), 5 slot (4), 6 slot (4), # 1 sq, # 2 sq, # 3 sq, TX 10 (2), T15 torx (2), TX 20 (2), TX 25 (2), TX 27 (2), TX 30 (2), TX 40 (2), 1.5 hex, 2 hex, 2.5 hex, 3 hex, 4 hex, 5 hex, 6 hex</li> <li>Labelled accessory slots for convenient accessory location</li> <li>Hard plastic case for safe and easy storage</li> </ul>	728492	9323624021901

### SDS Plus



Description	Size	Item Number	Barcode	Suits
5 Piece SDS Plus Drill Set:	Set includes: • 5mm x 160mm • 6mm x 160mm • 8mm x 160mm • 10mm x 160mm • 12mm x 160mm	782531	8717574047172	Suitable for HiKOKI / Hitachi light weight rotary hammers including the DH36DPA/DH-36DPC/DH18DBL/DH18DSL/DH26PC/DH28PC/DH36DAL and other brands.
Bull Point	250mm	751590	8717472815330	
Cold Chisel	20 x 250mm	751591	8717472815347	

### SDS Max



Description	Size	Item Number	Barcode	Suits
Bull Point	280mm	750990	871754653120	Suitable for HiKOKI / Hitachi hammers including the DH36D-MA/DH40MC/DH40MEY/DH-45MEY/DH52MEY/H45MEY/H60MEY and other brands.
Bull Point	400mm	750991	871754653144	
Cold Chisel	27 x 280mm	750993	8717154653137	
Cold Chisel	27 x 400mm	750994	8717154653151	

### Demolition Bits

#### 30mm Hexagon with Collar




Description	Size	Item Number	Barcode	Suits
Bull Point	410mm	401036	4549115002043	Suitable for HiKOKI / Hitachi hammer H65SB/H65SB2/H65SB3 and other brands.
Cold Chisel	35 x 410mm	401990	4549115045293	
Wide Chisel	75 x 450mm	751545	8717472818522	
Spade	135 x 450mm	751542	8717154653670	

#### 28mm Hexagon with Collar



Description	Size	Item Number	Barcode	Suits
Bull Point	550MM	751571	8717472818539	Suitable for HiKOKI / Hitachi hammer H90SB/H90SG and other brands.
Cold Chisel	35 X 550MM	751572	8717472818546	



## Super Thin Inox Wheels - Steel and Stainless Steel



Diameter (mm)	Thickness (mm)	Bore (mm)	Product Code	Barcode	Pack Qty
100	1	16	797089	9323624014101	25
125	1	22.2	797091	9323624014125	25

## Metal Cutting Wheels



Diameter (mm)	Thickness (mm)	Bore (mm)	Product Code	Barcode	Pack Qty
335	3	25.4	CW355	9377778040509	5

## Diamond Wheels



Description	Diameter (mm)	Bore (mm)	Segment Height (mm)	Product Code	Barcode
3 Pack Assorted	105	20 / 16	6 - 7	797130	9323624015092
3 Pack Assorted	125	22.2	7	797230	9323624028412
Universal Segmented	350	25.4	15	773007	4549115056336

## Easy Bevel for 125mm Grinder



Description	Product Code	Barcode	For Model
125mm Easy Bevel Kit	797006	9323624007196	G13SB3 / G13SE2 / G13YC2 / G13SW / G13SQ / G13VA
125mm Zec Disc to suit Easy Bevel	797019	9232624007295	

## Rubber Pads



Part No. (Pad)	Part No. (Nut)	Pad Size	Nut Thread	Barcode
936558Z	935513	100	M10 x 1.5	4966375446521
937825Z	937826Z	115	M14 x 2	4966375447269
953247Z	953246Z	180	M14 x 2	4966375468633





## Saw Blades

### Timber Saw Blades



Diameter (mm)	Bore (mm)	No. of Teeth	Product Code	Barcode	For Model
125	20	24	337942	4549115088757	C18DBL
125	20	40	402527	45499115076716	C18DBL
165	20	24	338935	4549115107373	C18DBAL / C18DSL

### Timber Saw Blades - 10 pack



Diameter (mm)	Bore (mm)	No. of Teeth	Product Code	Barcode	For Model
185	20	24	401934	4549115036918	C7UR / C7MFA
235	25	20	401935	4549115036925	C9SA3

### Jig Saw Blade Set



Description	Product Code	Barcode
10 piece set includes: <ul style="list-style-type: none"> <li>• 2 x HCS Wood 100 x 8 TPI - J W20</li> <li>• 2 x HCS Wood 100 x 6 TPI - J W40</li> <li>• 1 x HCS Wood 76 x 18 TPI - J W10C</li> <li>• 2 x HCS Wood 100 x 10 TPI - J W10</li> <li>• 1 x HCS Wood 100 x 10 TPI (reverse rake) - J W10R</li> <li>• 2 x HSS Metal 91 x 19 TPI - J M1</li> </ul>	750049	8717154659177

### Reciprocating Saw Blade Set



Description	Product Code	Barcode
13 piece set includes: <ul style="list-style-type: none"> <li>• 3 pcs. BIM - 6"/152mm x 6 TPI</li> <li>• 2 pcs. BIM - 6"/152mm x 18 TPI</li> <li>• 3 pcs. BIM - 8"/203mm x 14 TPI</li> <li>• 3 pcs. BIM - 9"/230mm x 6 TPI</li> <li>• 1 pc. BIM - 9"/230mm x 10 TPI</li> <li>• 1 pc. Storage Pouch</li> </ul>	752049 402153	8717574004557

### Planer Blades



Description	Length (mm)	Product Code	Barcode
2 x Reversible TCT Blades	82	750470	8717472818812
10 x Reversible TCT Blades	82	750471	8717472818829

### Site Bags



Description	Product Code	Barcode
Large Site Bag	402094	4549115048966
Premium Site Bag with Extension Handle & Wheels	402096	4549115048980

MODEL	MOTOR	ARMATURE	MAGNET	SWITCH	BRUSHES
AW18DBL		337312	337310 Wiring Ass'y		
C18DBAL		361010 Rotor	340911 Wiring Ass'y	371907	
C18DBL		336547 Rotor	340872 Wiring Ass'y Inc Switch	332552	
C18DSL	324572			319825	
C3607DA		361087 Rotor	341002 Wiring Ass'y	371907	
CB18DBL		361012 Rotor	340922 Wiring Ass'y	371322	
CE18DSL		339998	328195	329057	999054
CF18DSL		361025	333796	333795	999100
CF18DSAL		361025	333796	333795	999100
CG18DSDL	333506			332552	999016
CG36DA				332552	999106
CH18DSL	333323			333325	
CH3656DA	335016			335018	999106
CJ18DSL	328361			328335	
CJ36DA		361125 Rotor	341059 Wiring Ass'y	375863	
CJ36DB		361125 Rotor	341060 Wiring Ass'y		
CN18DSL		339995	328195	329057	999054
CR18DBL		361062 Rotor	340968 Wiring Ass'y Inc Switch		
CR18DSL		360703	324468	319861	999068
CS3630DA		Arm 360948	323156	335124	999068
CV18DBL		337398	337400 Wiring Ass'y		
DB3DL2	332755			333316	
DH18DBL		361035 Rotor	370954 Wiring Ass'y	370322	
DH18DBQL		361035 Rotor	370954 Wiring Ass'y	370322	
DH18DSL		360809	328482	328484	999100
DH36DPC		361072 Rotor	372867 Wiring Ass'y	370322	
DH36DAL		360801	323156	328058	999090
DH36DMA		361085 Rotor	341000 Wiring Ass'y	373096	
DN18DSL		360980	337433	337282	999054
DS18DBEL		336380 Rotor	335952 Wiring Ass'y		
DS18DBL		331710	340765	331715	
DS18DBL2		339763 Rotor	370832 Wiring Ass'y		
DS18DJL	337115			336630	
DS18DSDL		360930	334442	333640	999054
DS18DSFL	332558			332822	
DS18DSL		360860	322520	329173	999054
DS36DA		361070 Rotor	373161 Wiring Ass'y Inc Switch		
DV18DBL		333528	340765	331715	
DV18DBL2		339763 Rotor	370832 Wiring Ass'y		
DV18DJL	332020			336630	
DV18DSDL		360932	334442	333640	999054
DV18DSFL	332020			332822	
DV18DSL		360860	322520	329173	999054
DV36DA		361070 Rotor	373161 Wiring Ass'y Inc Switch	370151	
G18DBAL		36099 Rotor	339227 Wiring Ass'y Inc Switch	329057	
G18DBBAL		360991 Rotor	371691 Wiring Ass'y	371332	
G18DBL		360991 Rotor	337878 Wiring Ass'y	329057	
G18DSL		360804	328195	329057	999054
G3613DA		361075 Rotor	340986 wiring Ass'y		
G3613DB		361075 Rotor	340987 wiring Ass'y		
NR1890DBCL		361071 Rotor	372291 Wiring Ass'y	371019	
NT1850DBSL		361054 Rotor	370930 Wiring Ass'y		
NT1865DBAL		361054 Rotor	370932 Wiring Ass'y		
NT1865DBSL		361054 Rotor	370931 Wiring Ass'y		

MODEL	MOTOR	ARMATURE	MAGNET	SWITCH	BRUSHES
P18DSL		360969	319846	319825	999017
R18DSAL	337805			333324	
R18DSL	331402			331393	
RB18DSL	328615			334699 Kit	
RB36DA		335194 Rotor	373113 Wiring Ass'y		
VB3616DA		361125 Rotor		376000	
WF18DSL		360958	333735	332459	999054
WH18DBDL		332188 Rotor	332201 Wiring Ass'y Inc Switch	334903	
WH18DBDL2		361046 Rotor	370557 Wiring Ass'y Inc Switch	339217	
WH18DDL		335325 Rotor	337892 Wiring Ass'y Inc Switch	335523	
WH18DSDL		360947	334901	334956	999054
WH36DB		361046 Rotor	373024 Wiring Inc Switch	339217	
WR18DBDL		332188 Rotor	332203 Wiring Ass'y Inc Switch	334903	
WR18DBDL2		361055 Rotor	370942 Wiring Ass'y Inc Switch	339217	
WR18DSDL		360947	334901	334956	999054
WR18DSHL		360992	333796	333795	999100
WR36DA		361077 Rotor Inc Bearings	373029 Wiring Inc Switch	339217	
WR36DB		361077 Rotor Inc Bearings	373050 Wiring Inc Switch	339217	
WR36DC		361055 Rotor	341066 Wiring Ass'y	339217	

## CORDLESS ACCESSORIES - MAJOR PARTS

MODEL	BULB	LENS	LAMP	LAMP COVER	LAMP CAP
UB10DL	330267	330608			
UB12D	314424	318540			
UB12DL			323339	323340	323519
UB18D	318767	318540			
UB18DAL	318767	318540			
UB18DL			323339	323340	323519
UB18DSL			323339	323340	323519

## AC | Major Parts List

MODEL	ARMATURE	FIELD	SWITCH	CARBON BRUSHES	CARBON BRUSHES AUTOSTOP
AW100	335543 Motor	335543 Motor	335554		
AW130	335592 Motor	335592 Motor	335554		
AW150	335648 Motor	335648 Motor	335554		
B16RM	326396 Motor	326396 Motor	726811		
C10FCE2(H1)	360695F	340687F	326700	999065	
C10FCH2(H1)	360695F	340687F	326700	999065	
C10FL	326432 Motor	326432 Motor	726355		
C10FSB	360898F	340779F	998868	999043	
C10FSH	360898F	340779F	998868	999043	
C12LCH	360710F	340625F	320950	999065	
C12LSH(H1)	360790C	340703F	324424	999065	
C12RSH(H1)	360790C	340703F	324424	999065	
C12RSH2(H1)	361021D	340925E	324424	999065	
C6MEY(H1)	361011 Rotor	340913B Wiring Ass'y	338900		
C6MFA	360694F	340614F	963756Z	999043	
C6SS	360883F	340614F	331259	999043	
C7MFA(H6)	360694F	340614F	963756Z	999043	
C7SB2(H6)	360577H	340528H	320969	999038	
C7UY	360882F	340762F	963756Z	999043	
C7YA(FCB)	360187F	340199F	302446	999038	
C8FSE(H1)	360839F	340729F	324424	999001	
C8FSHE(H1)	360839F	340729F	324424	999001	



MODEL	ARMATURE	FIELD	SWITCH	CARBON BRUSHES	CARBON BRUSHES AUTOSTOP
C9BA2(H1)	360778F	360661F	325357	999038	
C9SA2(H1)	360759F	340660R	325357	999038	
C9SA3(H6)	361033F	340942H	370260	999038	
CC14SF	360732F	340643H Until 08/11 340643F Since 09/11	976825	999044	
CC16SA	951875F	951909J	951864	999044	999082Z
CC16SB	977174 Motor 3PH	977174 Motor 3PH			
CE16SA	360622F	340567F	314603	999021	
CJ110MV	360741F Until 11/05 360764F Since 12/05	340545E Until 11/05 340666E Since 12/05	325085	999041	
CJ110VMA	306764F	340545E	955509	999041	
CJ160V(H1)	361014E	340915E	339021	999041	
CJ160VA(H1)	361014E	340915E	330698	999041	
CJ90VST(H1)	360893E	340774E	325085	999041	
CM12Y	360287F	340349F	307650	999044	
CN16SA	360622F	340567F	314603	999021	
CR13V	360616F	340563K	327130	999043	
CR13VA	360514F	340479K	320142	999043	
CR13VBY(H1)	360795F	340698F	320142	999043	
CS35SB(H1)	338818 Motor	N/A	338827	999104	
CS40SB(H1)	338818 Motor	N/A	338827	999104	
CV350V(H1)	360984F	360890F	335460	999005	
D10VC2	360596E	340547F	321632	999041	
D13	981657F	982797G	971667Z		999073
D13VB3	360652F	340587F	322854	999041	999072
D13VL(H6)	361003F	340906F	338756	999088	
D13VF	360543F	340504E	320195	999041	999072
D13VG	360543F	340504E	320195	999041	999072
D6SH	360439F	340391E	994734	999041	999072
DH22PG(H1)	360798F	340701F	331454	999041	999072
DH24PB3	360720F	340635F	331454	999041	999072
DH24PC2	360648F	340581F	322825	999088	999076
DH24PC3	360720F	340635F	331454	999041	999072
DH24PG(H1)	360962F	340866F	335796	999041	999072
DH26PC(H1)	360961F	340850F	335796	999041	999072
DH28PC(H1)	360857F	340739J	331677	999004	
DH26PC2		Arm 361108F		374610	999041
DH28PCY(H1)	360961F	340850F	335796	999041	999072
DH28PEC	375583	361104 Rotor		374452	
DH30PC2	360768F	340672F	325675		999073
DH38MS(H1)	360875F	340753f	313093	999043	
DH40MC(H1)	361058F	340963F	371171	999043	999073
DH40MR	360591F	340542F	313093	999043	999073
DH40MRY(H1)	360591F	340680E	990941		999073
DH40MEY(H1)	337578	340885E	337587		
DH45MR	360737F	340646F	313093		999071
DH45MEY(H1)	337578 Rotor	340885E	337587		
DH50MRY	360819f	340712F	990941		999074
DH52MEY(H1)	360992	340899	337587		
DV13VSS(HA)	360864G	340743G	330716	999041	999072
DV16V	360626E	340573F	321632	999041	999072
DV16VSS(HA)	360863F	340742F	330716	999041	999072
DV18V	360655F	340589F	322854	999041	999072
DV20VB2(H8)	360781F	340587F	327061	999041	999072
DV20VB2-SC(H9)	360781F	340587F	327061	999041	999072
DV20VD(H1)	361003F	340906F	338756	999088	
DV22V(H6)	361002F	340905E	338756	999088	
FCJ65V3	360724F	340669F / 360724F	323086	999041	999072

# AC Tools | Major Parts List

MODEL	ARMATURE	FIELD	SWITCH	CARBON BRUSHES	CARBON BRUSHES AUTOSTOP
FDV16VB2	360207F	340222F	321632	999041	999072
FSV10SA	360681F	987044F	323324	999041	999072
G10SD2	360497F	340441F	321208	999088	999076
G10SN(H1)	360891G	340791J	314603	999005	
G10SQ(H1)	360891G	340771J	314603	999005	
G10SR3	360799E	340702F	314603	999005	
G10SR4	361016E	340016F	339149	999067	
G12SE2	360603F	340551F	311739	999088	999076
G12SR3	360799E	340702F	314603	999005	
G12SR4	361016E	340016E	339149	999067	
G13BY(H1)	372887	372890	372892	372939	
G13SB3	360734E	340645F	319319	999088	999076
G13SW(H6)	360970F	340870F	314603	999088	
G13SC2	360433F	340383F	313278	999043	
G13SE2	360603F	340551F	311739	999088	999076
G13SQ(H1)	360891G	340771J	314603	999005	
G13SR3	360799E	340702F	314603	999005	
G13SR4	361016E	340016E	339149	999067	
G13VA(H1)	360869E	340749E	314603	999088	999076
G13YC2	360869E	340823E	321099	999088	999076
G18SE3	360594F	340546F	320238	999061	999089
G18UBY(H1)	360777E	340682E	320235	999061	999089
G18UC(H1)	360594F	340846E	335122	999061	
G18UDY(H1)	360594F	340846E	370378	999061	
G23SE2	360594F	340546F	320238	999061	999089
G23SR	360762E	340664f	320238	999044	999074
G23SS(H1)	360852E	340737F	320239	999038	
G23ST(H1)	360982F	340888F	320238	999059	999093
G23UB2	360594F	340546F	320371	999061	999089
G23UBY	360594F	340682E	320371	999061	999089
G23UDY(H1)	360594F	340846E	370378	999061	
GP13	951003F	340435H	971824Z	999038	
GP2	985134F	985133F	980778	999021	999070
GP2S2(H1)	360879F	340758L	332805	999088	999076
GP3V(H1)	360911F	340827F	314603	999088	999076
GP5V(H1)	360914F	340829F	314603	999088	999076
H41MB	360903F	340788H	306143	999043	999073
H45MEY(H1)	337578	340885E	337587		
H45MR	360571F	340519F	306143		999073
H45MRY(H1)	360571E	340681E	306143		999073
H60MEY(H1)	360992	340899	337587		
H65SB2	360286F	340259H	306143		999086
H65SB3(H1)	361024F	340928F	337051	999086	
H90SB	360073F	340014F	981533Z		999086
H90SG(H1)	360974F	340876F	337051		999086
M12SA2	360750F	340668H	301821	999044	
M12SE(H1)	360888F	340668M	331812	999038	
M12V2	360748E	340659H	301821	999044	
M12VE(H1)	860886E	340659M	331812	999038	
M6SB	360428F	340374H	955509	999021	
M8SA2	360775F	340677F	314603	999043	

MODEL	ARMATURE	FIELD	SWITCH	CARBON BRUSHES	CARBON BRUSHES AUTOSTOP
M8V2	360773E	340675F	314603	999043	
P13F	328164	328166	326429	326458	
P20SB(TCT)	958697F	958693H	963756Z	999021	
P20SF(H1)	360936F	340834F	334474	999021	
P20ST	360942F	340834F	334474	999021	
RB40VA	360683F	340602J	323086	999021	
RP150YB(H1)	337472 Motor		338471		
RP350YE(H1)	337472 Motor		338471		
RP30Y	918M77A02B Motor	918M77A02B Motor	905306A000	905264AG02	
SAT-180	953297F	953231H	956632	999043	
SAY150A	980785F	980783H	980778	999021	
SB10V2(H1)	360797F	340700H	325085	999043	
SB8V2	360797F	340700H	325085	999043	
SP18VA	360576E	340526E	321449	999043	
SV12SD	360124F	340156F	971667Z	999041	999072
SV12SG	360637F	340578F	311948	999041	999072
SV12SH	360637F	340578F	311948	999041	999072
SV13YA(H1)	360696F	340616F	311948	999041	999072
SV13YB(H1)	360698F	340618F	311948	999041	999072
SV15YC(H1)	371861	371856	371854	371859	
VB16Y	360552F	340500F	319716	999043	
VTV16	981611F	981610H	318344		999073
W6VB3	360675F	340599E	323479		999091
W8VB2	360675F	340599E	323479		999091
WR16SA(H7)	360687F	340605F	985103	999021	
WR16SE(H1)	337203	340882	337202		
WR22SA	360700F	340620F	985103	999043	
WR22SE(H1)	360990	340897F	337202		
WR25SE(H1)	360989	340895F	337202		

MODEL	MOTOR	V-BELT	SWITCH
B16RM	326396	726520 / 726521	726811
C10FL	326432		326429
CC16SB	977174	964640	317841





**6** YEAR  
POWER TOOLS  
WARRANTY\*

## OUR BEST WARRANTY EVER. GUARANTEED.

Get your work done faster and easier, safe in the knowledge HiKOKI Power Tools are manufactured to exacting, world class standards. All backed by the peace of mind of our industry-leading **6 Year Warranty**.\* It's one more reason why you can have complete confidence in the tools you use, and the company who backs them. HiKOKI has over 70 years of power tool experience and an unmatched track record of innovation as Hitachi. Visit [hikokipowertools.com.au](http://hikokipowertools.com.au)

**HiKOKI**  
HIGH PERFORMANCE POWER TOOLS

\*6 year warranty on selected products with online registration.  
For details visit [www.hikokipowertools.com.au](http://www.hikokipowertools.com.au)

# Conditions of Limited Warranty

## Selected HiKOKI Products

APPLICABLE TO PURCHASES MADE ON OR AFTER 17 JUNE 2019



\*6 year warranty on selected products with online registration.  
For details visit [www.hikokipowertools.com.au](http://www.hikokipowertools.com.au)

HiKOKI Power Tools Australia Pty Ltd ('HiKOKI') warrants that selected products and services supplied by it and purchased by you from Authorised HiKOKI Dealers throughout Australia are free of defects and come with a limited warranty ('Warranty'). The selected HiKOKI products that come with a limited warranty are specifically set out in the 'Warranty Period and Selected Products' table in this Warranty. The services to which any Warranty applies are those services that are performed with an express warranty. For the avoidance of doubt, the selected HiKOKI product types that are set out in the 'Warranty Period and Selected Products' table include both the HiKOKI-branded and Hitachi-branded versions of those HiKOKI product types, provided that the products are purchased on or after 17 June 2019. All other HiKOKI products that are not listed in the Warranty Period and Selected Products table and other products listed under Warranty Exclusions are excluded from this express warranty.

### Warranty Claims

If you consider that any Service or selected product listed in the Warranty Period and Selected Products table supplied by HiKOKI is defective, you can lodge a claim under this Warranty and any apparent fault will be rectified free of charge by HiKOKI or a HiKOKI Authorised Service Dealer within the applicable Warranty Period for that selected product or Service, which is effective from the date of purchase provided that you meet the following conditions;

- ☐ You must produce the original invoice or other proof of purchase document disclosing the purchase date.
- ☐ All costs of installation, cartage, freight, travelling expenses, hiring tools and insurance are paid by the customer.
- ☐ The product, being precision equipment, has not been misused, adjusted or serviced by any person other than a HiKOKI Authorised Service Dealer.
- ☐ The equipment has been installed correctly and is used in accordance with the HiKOKI instructions supplied with the product.

HiKOKI offers this Warranty to you in addition to all other rights and remedies that you may have under law in relation to the selected products to which this Warranty relates.

If the supply of the Selected Products is a consumer sale pursuant to the Australian Consumer Law, the following statement applies. In this statement, 'goods' means the Selected Products, 'services' means any of HiKOKI's services that come with an express warranty, and 'our' means HiKOKI.

Our goods and services come with guarantees that cannot be excluded under the Australian Consumer Law. For major failures with the service, you are entitled:

- to cancel your service contract with us; and
- to refund for the unused portion, or to compensation for its reduced value.

You are also entitled to choose a refund or replacement for major failures with goods. If a failure with the goods or service does not amount to a major failure, you are entitled to have the failure rectified in a reasonable time. If this is not done you are entitled to a refund for the goods and to cancel the contract for the service and obtain a refund of any unused portion. You are also entitled to be compensated for any other reasonably foreseeable loss or damage from a failure in the goods or services.

Notwithstanding the proceeding clause, HiKOKI's liability in respect of a breach of a consumer guarantee or any warranty made under these Conditions of Limited Warranty for any of the selected products or services not of a kind ordinarily acquired for personal, domestic or household use is limited, to the extent permissible by law and at the option of HiKOKI to:

#### 1. with respect to Selected Products:

- replacing the Selected Products or the supply of equivalent products;
- the repair of the Selected Products;
- the payment of the cost of replacing the Selected Products or of acquiring equivalent products; or
- the payment of the cost of having the Selected Products repaired; or

#### 2. with respect to Service:

- supplying the Services again; or
- the payment of the cost of having the Services performed again.

To the extent permitted by law, all other warranties whether implied or otherwise, not set out in these Conditions of Limited Warranty are excluded and HiKOKI is not liable in contract, tort (including, without limitation, negligence or

breach of statutory duty) or otherwise to compensate the customer for:

1. Any increased cost or expenses;
2. Any loss of profit, revenue, business, contracts or anticipated savings;
3. Any loss or expense resulting from a claim by a third party; or
4. Any special, indirect or consequential loss or damage of any nature whatsoever.

If you wish to make a claim under this Warranty, you should:

- ☐ Contact: ph (02) 8887 8100
- ☐ Visit your nearest HiKOKI Customer Service Provider;
- ☐ Visit the HiKOKI website for details: [www.hikokipowertools.com.au](http://www.hikokipowertools.com.au)

These conditions of this Warranty may only be varied with the written approval of the directors of HiKOKI.

### Extended Warranty

If a product type in the 'Warranty Period and Selected Products' table has a period of time specified in the column titled 'Extended' applicable to it, then the Warranty Period for the relevant product type will be the period in the 'Extended' column only if:

- (a) the customer registers their contact information and information regarding their purchase of the relevant HiKOKI product/s on HiKOKI's website at [www.hikokipowertools.com.au](http://www.hikokipowertools.com.au) within 4 weeks after the date on which they purchased the relevant HiKOKI product/s; and
- (b) the customer has complied with all other terms and conditions of this Warranty.

The period in the 'Standard' column is the applicable Warranty Period for a product type if:

- (c) no period of time appears in the 'Extended' column for a product type; and
- (d) if a period of time appears in the 'Extended' column for product type but the conditions in (a) and (b) above are not satisfied.

## Warranty Period and Selected Products

Product Type	Warranty Period	
	Standard	Extended
AC Tools (Electric)*	3 years	6 years
Cordless tools (Naked)	3 years	6 years
Ni-Cd & Ni-MH batteries	1 year	N/A
Li-ion batteries	3 years	N/A
Chargers	3 years	N/A
Pneumatic tools (Air)	3 years	6 years
Outdoor Power Equipment (Engine)	3 years	6 years
Accessories	1 year	N/A
Hand Tools	1 year	N/A
Any of the above products purchased for the purposes of Hire & Rental	6 months	N/A

\*Excluding selected AC models as outlined above.

Where HiKOKI provides any express warranty relating to any Service, the applicable Warranty Period to all such services is a period of 3 months.

## Warranty Exclusions

This section identifies what is excluded under this Warranty.

This Warranty DOES NOT cover damage caused by you or by anyone else:

- ☐ misusing, overloading or abusing the HiKOKI product,
- ☐ operating the product in a manner that is not in accordance with the HiKOKI instructions supplied with the product (the "Manual"),
- ☐ failing to clean the product in accordance with the instructions for correct and regular cleaning as set out in the Manual,
- ☐ not carrying out periodic maintenance,
- ☐ neglecting or otherwise failing to maintain the product in accordance with the instructions for maintenance of the product including regular tune-ups, lubrication, etc.
- ☐ using incorrect voltage or non-authorised electrical connections with the product,
- ☐ installing the product incorrectly,
- ☐ using non-authorised/non-standard parts, non-genuine HiKOKI parts in connection with the product,
- ☐ repairing or carrying out any work on the product by someone other than an Authorised HiKOKI Service Dealer,
- ☐ causing a double burnout – field and armature burnout,
- ☐ operating the product with any guard, shield or line cutting knife removed, repositioned, or that is incomplete or damaged,
- ☐ using or operating the product with any evidence of partial failure of product or damage being present,
- ☐ tampering with the product in any way other than in accordance with the Manual,
- ☐ not having taken reasonable steps to prevent the damage or failure from occurring to the product,
- ☐ storing the product inconsistently with manufacturer's recommendations or where the product is exposed to corrosive substances such as fertilisers, grass and plant residue including palm tree sap, bore water and other detrimental environmental exposure,
- ☐ making mechanical adjustments that are inconsistent with the Manual—including, chains, bars, engine tuning etc,
- ☐ operating the product with incorrect fuel to oil ratio,
- ☐ having made improper adjustments of ignition timing or the carburetor,
- ☐ using the product with clogged or removed filters (i.e. fuel filter, oil filter, air filter), or
- ☐ using incorrect chain and bar oil for the oil pump.

In addition to the above, this Warranty DOES NOT cover the following:

- ☐ Selected Products purchased:
  - outside of Australia,
  - from a non-Authorised HiKOKI Dealer (such as purchases from unauthorised retailers and purchases over the internet, from local/international sellers or sites such as Ebay),
  - at an auction, or
  - from a private seller,
- ☐ Products not specifically set out in the Warranty Period and Selected Products table contained in this Warranty,
- ☐ Accidental damage or damage caused by an extra ordinary event or circumstance beyond your or anyone else's control including damage caused by:
  - environmental factors,
  - natural discolouration of material due to ultraviolet light,
  - crushing, impact with hard surface or damage caused in the transit of the product,
  - foreign material, or exposure of the product to excessive heat or cold or to solvents, or water entry into the product,
  - abnormal product performance caused by any ancillary equipment interference or other external factors,
- ☐ Damage or failure that occurs for a reason or reasons that were already disclosed to you (in writing or otherwise), prior to your purchase of the product,
- ☐ Damage or defects to the product that ought reasonably to have been revealed to you by an examination of the product, where you conducted such an examination before acquiring the product,
- ☐ Normal wear and tear due to the course of normal use,
- ☐ Freight costs associated with transporting the product between you, the place of purchase, the Authorised HiKOKI Dealer and HiKOKI for the purposes of making a claim pursuant to this Warranty or otherwise,
- ☐ Repairs that are required by you to be made to the product which are simply due to a clogged or restricted exhaust system, carbon deposits in exhaust ports, piston crown or combustion chamber or periodic decarbonising,
- ☐ Selected Products with serial number altered or removed,
- ☐ Refurbished, ex display or factory second selected products,
- ☐ Consumable items supplied with the product or that are a part of the product,
- ☐ Service parts,
- ☐ Accessories, that for the avoidance of doubt include but are not limited to the following: those included with the product at the time the product was purchased by you including cases & site bags, brushes, chucks, cord sets, bulbs, LED's & lamps, driver & drill bits, blades, driver blades, o-rings, switches & triggers, power tool attachments, blades & cutters, spark plugs, carburetor kits, filters, bars & chains, cutting equipment, recoil springs, rope & belts, measuring devices, air (pneumatic) fittings, nose caps, gaskets, fuel hoses, or
- ☐ The product coming into contact with sand, water, rust, corrosion, fire, vermin and insect infestation, power outages or surges or inadequate voltage or current.

If the selected product you are using has been rented or leased by you, and you consider a claim might be made under this Warranty, you should refer the matter to the rental or leasing company immediately and they will handle the matter.

This Warranty does not cover service costs in replacing and maintaining consumable parts and accessories that have ceased working through normal wear and tear such as, but not limited to: drill heads, blades, cutters and other parts classifiable as a consumable part or accessory.





## Notes

Please note that this page is for notes.

# 70 years of experience and we're still learning.

Ever since 1948 our in-house design team and engineers have been driven by ambition for technological innovations. Every day we broaden our knowledge to improve power tools. Tools that will make every single job as easy and comfortable as possible.



## HiKOKI Power Tools

HIKOKI POWER TOOLS AUSTRALIA PTY. LTD.  
ABN 27 072 677 153

Unit 1, 10 Boden Road, Seven Hills NSW 2147

Telephone: (02) 8887 8100

Follow us on our socials and never  
miss out on HiKOKI news



[hikokipowertools.com.au](http://hikokipowertools.com.au)

## Koki Holdings Co., Ltd.

Shinagawa Intercity Tower A, 20th floor 15-1,  
Konan 2-chome, Minato-ku, Tokyo 108-6020, Japan

**Tel.** +81-3-5783-0601

**Fax** +81-3-5783-0709

[www.koki-holding.com](http://www.koki-holding.com)