

HIKOKI

HIGH PERFORMANCE POWER TOOLS

Power tools
catalogue

2021 - 2022



Innovation never stops

Ever since 1948 we've been designing and developing high performance power tools. For over 70 years our Japanese engineers have utilized their technological knowledge, skills and experience to constantly improve our power tools. Guided by Japanese design principles, every element of our products is chosen to improve performance, balance, usability, longevity and control. Attention to details ensures the professional in finishing every single job as easy as possible. That's what drives us and keeps us one step ahead.

HIKOKI
HIGH PERFORMANCE POWER TOOLS

Welcome to the HiKOKI 2021-2022 Product Catalogue!

2020 has been an unprecedented year due to the Covid-19 pandemic but the Building and Construction industry has demonstrated steady growth in Australia.

Since our brand evolution from Hitachi Power Tools to HiKOKI High Performance Power Tools two and half years ago, we continue to deliver reliable, innovative, and high-performance quality products to cater for all professional trades – whether in construction, carpentry, plumbing, electrical, or mechanics.

For over 70 years, we have been designing and developing high-performance power tools with the most innovative technologies. Our mission is to create power tools that make every job as easy and comfortable as possible.

Our new product pipeline sees innovative technology continually placed in the hands of Australian professionals like you, so you can get the job done faster and easier. Our 36V ½" cordless router, 18V cordless laminate trimmer, 36V Cordless rebar bender & cutter and 36V Cordless vibrator are some of the innovative products launched in 2020 and we are only just getting started.

Our designers and engineers have the knowledge and experience to constantly improve and expand our cordless products that will make the toughest job as easy and comfortable as possible.

We thank you for your continued support and we trust that this product catalogue will help you familiarise our product range offering. We are looking forward to work with you moving forward in 2021.

Yours Sincerely,



Yoji Higashida
Managing Director
HiKOKI Power Tools Australia

Contents.
Everything
to reach
the highest
performance.

Introduction

HiKOKI Service

Technologies

| | |
|---------------|----|
| MultiVolt | 12 |
| Brushless | 14 |
| Gasless | 14 |
| IP56 | 15 |
| Triple Hammer | 15 |
| Li-ion | 16 |
| UVP | 16 |
| LVH | 16 |
| MPC | 17 |
| AHB | 17 |
| RFC | 17 |

| | |
|---------------------------|----|
| One System. One Solution. | 18 |
|---------------------------|----|

Cordless

| | |
|----------------------|----|
| MultiVolt | 24 |
| MultiVolt Combo | 35 |
| 18 Volt | 40 |
| 18 Volt Combo | 63 |
| Batteries & Chargers | 66 |

Pneumatic

| | |
|---------|----|
| Nailers | 68 |
|---------|----|

Drilling & Fastening

| | |
|-------------------------|----|
| Drills | 72 |
| Impact Drills | 74 |
| Screw Drivers | 76 |
| Brushless Impact Wrench | 77 |

Rotary & Demolition

| | |
|--------------------|----|
| Rotary Hammers | 80 |
| Demolition Hammers | 82 |

Grinding & Cutting

| | |
|----------------|----|
| Angle Grinders | 86 |
|----------------|----|

Polishing & Sanding

| | |
|----------|----|
| Sanders | 94 |
| Polisher | 95 |

Sawing

| | |
|---------------------|-----|
| Circular Saws | 98 |
| Compound Mitre Saws | 99 |
| Table Saw | 101 |
| Jig Saw | 102 |

Planing & Routing

| | |
|---------|-----|
| Planers | 104 |
|---------|-----|

Heat Guns

| | |
|-----------|-----|
| Heat Guns | 106 |
|-----------|-----|

Outdoor Power Equipment

| | |
|-----------------------|-----|
| High Pressure Washers | 108 |
|-----------------------|-----|

Cleaning

| | |
|-------------------|-----|
| Wet & Dry Vacuums | 110 |
|-------------------|-----|

Accessories

| | |
|----------------------------|-----|
| Drilling & Driving | 112 |
| Rotary and Demolition Bits | 112 |
| Grinding | 113 |
| Sawing & Cutting | 116 |
| Site Bags | 119 |
| Stackable Cases | 120 |
| High Pressure Washer | 121 |
| Vacuum Accessories | 122 |

Major Parts List

| | |
|----------|-----|
| Cordless | 123 |
| AC Tools | 124 |

**General
information.**
Good to know
before reading.

Safety

Double insulation power tools, indicated by the double square mark, can be operated without external grounding. Every HiKOKI power tool is designed and manufactured considering safety and usability. HiKOKI power tools are provided with various safety features like brakes, covers and clutches.

Power Input

HiKOKI power tools employ series motors whose modern design is based on many years of experience. Unless otherwise indicated in the catalogue, power input (Watt) is based on 240V.

General Precautions

1. Read and follow handling instructions provided with the power tool and comply with all the operating instructions and warnings.
2. Never let children use the power tool.
3. Keep others, especially children, away from the tool.
4. Wear eye protection to protect the eyes.
5. Never touch blades or cutters during operation.
6. Avoid unintentional contact with the power switch when the tool is connected to a power source.
7. To ensure proper function of the tool, DO NOT remove installed covers or screws. DO NOT modify components and parts.
8. Prior to operation, carefully inspect the tool to ensure all the parts are properly functioning.
9. Immediately stop operation if abnormalities are noted.
10. Ensure that motor ventilation opening is kept fully open.
11. Always keep the blades and cutters sharp and clean.
12. Have the power tool inspected at proper regular intervals by an authorized Service Centre.
13. Maintain the proper care and cleanliness of the power tool.
14. Consult an authorised Service Centre for repair and/or part replacement.
15. DO NOT use the power tool for other application than those specified in the handling instructions.
16. DO NOT use the tool for work beyond its prescribed capability.
17. To avoid possible electric shock, DO NOT use the power tool in wet areas.
18. Ensure that the applied voltage is the same as that specified on the nameplate.
19. Ensure that electric plug is plugged into a matching receptacle that is properly installed and grounded in accordance with the instruction manual, all applicable local codes, and ordinances, except for double insulated tools.
20. Ensure that the power supply is disconnected after operation.
21. DO NOT lift the power tool with the cord or remove the plug from the receptacle by pulling the cord.
22. Always handle the power tool with care.
23. Proper posture is essential for safe operation.
24. Dress properly and work in personal protective clothing, shoes and equipment.
25. Always keep the work area well-lit and in good order.
26. When not in use, store the power tool in a dry place.
27. DO NOT stare into LASER beam.

Notes

- HiKOKI Power Tools Australia reserves the right to change specifications of parts and accessories of HiKOKI power tools without notice.
- Figures of battery capacity are nominal values.
- Some models in this catalogue are shown with optional accessories and fasteners such as screw, nail, bit, socket, blade, battery and grinding wheel.
- Product images are for display purposes only.
- Accessories are not included unless otherwise stated.
- Not all items shown in this catalogue are held in stock by retailers at all times, orders are subject to product availability at time of purchase.
- Product information and specifications should be confirmed at time of purchase.
- Errors & Omissions Excepted.

Index

A

| | |
|-------------------------------|-----|
| AC Major Parts List | 124 |
| Accessories For Screw Drivers | 112 |
| AW150(H1Z) | 108 |
| AW18DBL(HRZ) | 59 |

B

| | |
|------------|----|
| B16RM(HWZ) | 73 |
| BSL1830C | 66 |
| BSL36A18 | 66 |
| BSL36B18 | 66 |

C

| | |
|---------------------------|-----|
| C10FCE2(H1Z) | 99 |
| C10FSB(H1Z) | 100 |
| C10RJ(H1Z) | 101 |
| C1806DA(H4Z) | 54 |
| C18DBAL(H4Z) | 54 |
| C18DBL(H4Z) | 53 |
| C18DSL(H4Z) | 54 |
| C3607DA(HRZ) | 27 |
| C3607DRA(H4Z) | 27 |
| C3610DRA(HAZ) | 27 |
| C3610DRJ(H4Z) | 28 |
| C7MFA(H6Z) | 98 |
| C9SA3(H6Z) | 98 |
| CB18DBL(H4Z) | 57 |
| CC14SF(6WZ) | 102 |
| CE18DSL(H4Z) | 58 |
| CG36DB(H4Z) | 32 |
| CH18DSL(H4Z) | 59 |
| CH3656DA(H4Z) | 32 |
| Cicular Saw Dust Bag | 119 |
| CJ18DA(H4Z) | 55 |
| CJ36DA(H2Z) | 29 |
| CJ36DB(H2Z) | 29 |
| CJ90VST2(H1Z) | 102 |
| CM5MA(H1Z) | 90 |
| CN16SA(H1Z) | 102 |
| CN18DSL(H4Z) | 58 |
| Cordless Major Parts List | 123 |
| CR18DA(H4Z) | 55 |

| | |
|--------------------|-----|
| CR18DBL(H4Z) | 55 |
| CR36DA(HGZ) | 29 |
| CS3630DA(H4Z) | 33 |
| CS3635DB(H4Z) | 33 |
| Cutting Guard Clip | 115 |
| CV18DBL(H4Z) | 58 |

D

| | |
|-------------------------|-----|
| D13(H1Z) | 73 |
| D13VG(H1Z) | 72 |
| D13VL(H6Z) | 72 |
| DB3DL2(HLZ) | 43 |
| DH18DBL(H4Z) | 45 |
| DH18DPA(H2Z) | 44 |
| DH18DPB(H4Z) | 44 |
| DH18DPC(H4Z) | 44 |
| DH26PC2(H1Z) | 80 |
| DH28PEC(H1Z) | 80 |
| DH36DMA(HAZ) | 24 |
| DH36DPA(H4Z) | 23 |
| DH36DPC(HRZ) | 23 |
| DH36DPE(H4Z) | 23 |
| DH40MEY(H1Z) | 82 |
| DH45MEY(H1Z) | 82 |
| Diamond Wheels | 113 |
| DN18DSL(H4Z) | 43 |
| DS18DBL2(H4Z) | 40 |
| DS36DA(HRZ) | 22 |
| Dust Collectors | 114 |
| Dust Extractor Adaptors | 118 |
| DV16VSS(HAZ) | 74 |
| DV18DBL2(H4Z) | 41 |
| DV18DBSL(H4Z) | 40 |
| DV18DJL(HCZ) | 40 |
| DV20VD(H1Z) | 75 |
| DV22V(H6Z) | 75 |
| DV36DA(HRZ) | 22 |

E

| | |
|------------------------------|-----|
| Easy Bevel for 125mm Grinder | 113 |
| EBM315 | 66 |
| ET36A(H0Z) | 67 |
| Extension Guide Assembly | 119 |

F

| | |
|--------------|-----|
| Flanges | 118 |
| FSV10SA(H1Z) | 94 |

G

| | |
|---------------|-----|
| G10SR4(H6Z) | 86 |
| G13BYEQ(H1Z) | 88 |
| G13SB4(H1Z) | 87 |
| G13SC2(H1Z) | 87 |
| G13SE3(H1Z) | 87 |
| G13SR4(H6Z) | 86 |
| G13YC2(H1Z) | 88 |
| G18DBBAL(H5Z) | 52 |
| G18DBL(H5Z) | 52 |
| G18DSL2(H5Z) | 52 |
| G18SE4(H1Z) | 88 |
| G23ST(H1Z) | 89 |
| G23UDY2(H1Z) | 89 |
| G3613DA(HRZ) | 26 |
| G3613DB(HRZ) | 26 |
| G3623DA(H4Z) | 26 |
| GM13Y(H1Z) | 90 |
| GP18DA(H4Z) | 53 |
| GP18DB(H4Z) | 53 |
| GP2S2(H1Z) | 91 |
| GP5V(H1Z) | 91 |
| Guides | 118 |

H

| | |
|----------------------------------|-----|
| H41ME(H1Z) | 83 |
| H45MEY(H1Z) | 83 |
| H60MEY(H1Z) | 84 |
| H65SB3(H1Z) | 84 |
| H90SG(H1Z) | 84 |
| Hammer Grease | 113 |
| High Pressure Washer Accessories | 121 |

J

Jig Saw Blade Set 117

K

KC18D5P(HRZ) 64
KC18D8P(HRZ) 65
KC18D8P(HRZ) 65
KC18DBSL(HAZ) 63
KC18DDBL(HCZ) 64
KC18DPL(HRZ) 63
KC36D12P(HRZ) 38
KC36D4A(HRZ) 37
KC36D5P(HRZ) 37
KC36D8P(HRZ) 38
KC36DBDL(HRZ) 35
KC36DDBL(HRZ) 36
KC36DPL2(HRZ) 35
KC36DRBL2(HRZ) 36

M

M1808DA(H4Z) 56
M3612DA(H4Z) 30
Metal Cutting Wheels 116
Mitre Saw Dust Bag 119

N

N3804AB3(H2Z) 68
NR1890DBCL(HRZ) 50
NR90AD(H4Z) 69
NT1850DA(H4Z) 49
NT1850DBSL(H4Z) 48
NT1865DA(HRZ) 49
NT1865DBAL(HRZ) 48
NT1865DBSL(HRZ) 50
NT50AE2(H2Z) 68
NT65M2(H2Z) 68
NT65MA4(H2Z) 69
NV65AF3(H1Z) 69

P

P18DSL(H4Z) 57
P20ST(H1Z) 104
Planer Blades 117

R

R18DSL(H4Z) 60
R18DTB(H4Z) 60
R36DA(H4Z) 34
RB18DC(DS4Z) 59
RB36DA(H4Z) 32
Reciprocating Saw Blade Set 117
RH600T(H1Z) 106
RH650V(H1Z) 106
RH650V(H1Z) 108
RP250YDL(H1Z) 110
RP300YDL(H1Z) 110
RP3608DA(H4Z) 34
Rubber Pads 113

S

Safety Guards 114
Sander & Polisher Attachments 116
SB8V2(H1Z) 95
SDS Max 112
SDS Plus 112
Side Handles 115
Side Handles 118
Site Bags 119
SP18VA(H1Z) 95
Spanners and Wrenches 115
Stackable Cases 120
Super Thin Inox Wheels
- Steel and Stainless Steel 113
SV12SG(H1Z) 94
SV13YA(H1Z) 94
SV15YC(H1Z) 95

T

Timber Saw Blades 116

U

UB18DA(W4Z) 61
UB18DGL(L0Z) 61
UB18DJL(L0Z) 61
UC18YML2(H0Z) 67
UC18YSL3(H0Z) 67
UC18YTSL(H0Z) 67
UC3SFL(H0Z) 67
UF18DSAL(H0Z) 62
UM36DA(HRZ) 31
UR18DSDL(H4Z) 62
US18DA(H4Z) 62
UV3628DA(HRZ) 31

V

Vacuum Accessories 122
VB3616DA(HGZ) 31
Vice Assembly 119

W

W6VB3(H1Z) 76
W8VB2(H1Z) 76
WF18DSL(H4Z) 47
WH18DBDL2(H4Z) 42
WH18DBSL(H4Z) 42
WH18DSDL(H4Z) 42
WH36DB(HRZ) 22
Wheel Nuts 114
Wheel Washers 114
WR18DBDL2(HRZ) 46
WR18DSDL(H4Z) 46
WR22SE(H1Z) 77
WR25SE(H1Z) 77
WR36DA(HRZ) 25
WR36DB(HRZ) 25
WR36DC(HRZ) 25
WR36DE(H4Z) 24

70 years of experience and we're still learning.

Ever since 1948 our in-house design team and engineers have been driven by ambition for technological innovations. Every day we broaden our knowledge to improve power tools. Tools that will make every single job as easy and comfortable as possible.

Technologies





MULTI VOLT battery system

AC POWER.

DC FREEDOM.

A new generation battery system (BSL36A18), with almost the same size and weight as our 18V 5.0Ah/6.0Ah battery, but it's the technology inside that provides you with the great improvements you need. Doubling voltage provides the optimal power for the MULTI VOLT 36V tools, without the hassle of cords. The MULTI VOLT batteries are compatible with a wide range of 18V cordless tools, which means you can easily switch from one power tool to another. So you're just a simple click away from maximum performance.





The battery platform for 36V and 18V power tools.

The power of corded. The freedom of cordless.

Voltage switches automatically between 36V and 18V

Compact and lightweight

The advantages of MULTIVOLT

- One battery for the entire range of 36V and 18V power tools.
- Saving cost; from now on you only invest in power tools without battery.
- One battery delivers all the power you require, even for 36V power tools. So no hassle with two 18V batteries!
- Maximum power till the very last second.
- Long lifespan.



BRUSH LESS


Brushless Motor



A HiKOKI technical advancement. After pioneering the use of brushless motors in cordless tools, now we have applied their benefits to electric corded tools with astonishing results.

Get your hands on a compact and lightweight range of tools with heavy-duty power. By reducing the number of moving parts in the motor we have decreased tool size and weight but increased power output.

HiKOKI brushless motors deliver greater durability and a longer life even under heavy use. There are no carbon brushes to regularly replace and no risk of armature burnout, layer short or commutator wear.

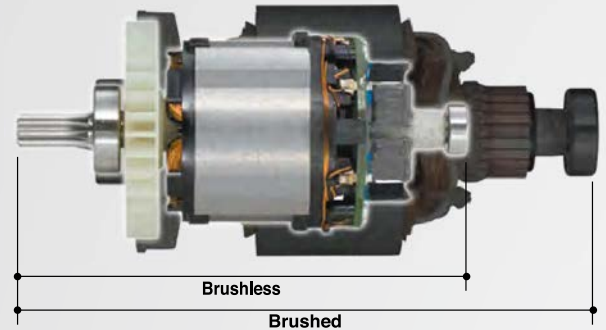

Long Lifetime,
Maintenance-free



Compatible with
Engine Generators¹



Compact,
Lightweight



Stable Performance
during Voltage Drops¹

The features of the AC (corded) brushless motor tools only.

GASLESS



Now as fast as traditional gas-driven nailers but safer, cleaner, easier, and far more cost effective to use.


Not to mention much less noisy and more environmentally friendly.

Presenting HiKOKI Gasless Nailers, a great example of HiKOKI innovation in action. The secret lies in combining cordless and pneumatic technology in a unique compressed air driven system that is powerful, fast, portable, and lightweight.

With every nail being driven by compressed air, there is no need for the hassle or expense of replacing gas cells. Given that gas nailers are approximately 50% more expensive to run, it adds up to an amazing operating saving over the life of your tool.

Furthermore, there are no combustion chambers to regularly clean and fewer parts to manage, so your service, down time and maintenance costs will all be drastically reduced.

With a HiKOKI Gasless Nailer, your safety is paramount because an automatic trigger lock eliminates unwanted firing. Plus, the shock absorption system incorporated throughout also makes them the most comfortable nailers you have ever used.

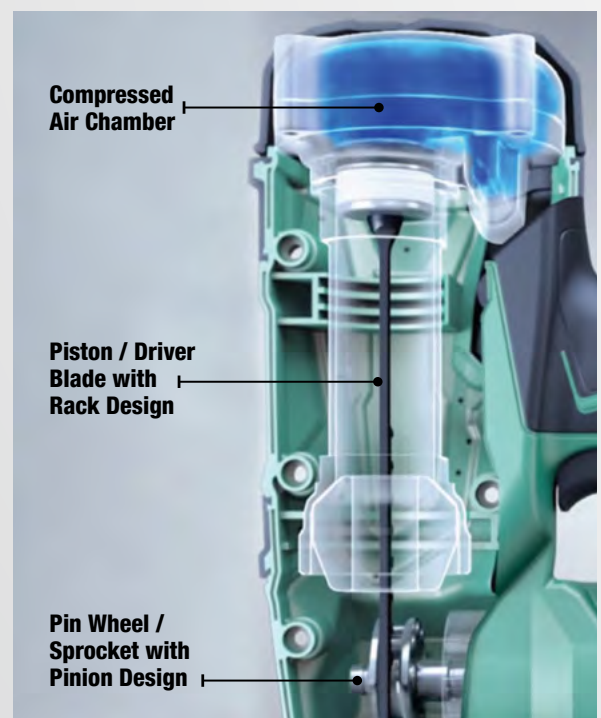

IP56



International Protection (IP) is a standard developed by the International Electrotechnical Commission (IEC) to indicate the degrees of protection provided by enclosures of electrical equipment against access to hazardous parts, ingress of solid foreign objects and ingress of water.

1. Our products offer an extent of resistance to dust and water, however the feature does not warrant that no failure caused by dust or water will happen. Do not use or leave these products under water, or in an area with heavy dust or exposed rain.
2. Only the forms of the tool bodies equipped with batteries conform with the degrees of protection indicated by IP56. That does not warrant separately dust and water resistance of the rechargeable batteries.
3. The cordless impact driver equipped with battery conforms with IP56, but the certification applies only to the main unit. Dust and water resistance of the battery is not.

| IP 5 x Degrees of protection against solid foreign objects | |
|--|--|
| 0 | Non-protected |
| 1 | Protected against solid foreign objects of 50mm ø and greater |
| 2 | Protected against solid foreign objects of 12.5mm ø and greater |
| 3 | Protected against solid foreign objects of 2.5mm ø and greater |
| 4 | Protected against solid foreign objects of 1.0mm ø and greater |
| 5 | Dust protected: Ingress of dust is not totally prevented, but dust shall not penetrate in quantity to interfere with satisfactory operation of the apparatus or to impair safety |
| 6 | Dust-tight: No ingress of dust |

| IP 6 x Degrees of protection against ingress of water | |
|---|---|
| 0 | Non-protected |
| 1 | Protected against vertically falling water drops |
| 2 | Protected against vertically falling water drops when enclosure tilted up to 15° |
| 3 | Water sprayed at an angle up to 60° on either side of the vertical shall have no harmful effects |
| 4 | Water splashed against enclosure from any direction shall have no harmful effects |
| 5 | Water projected in jets against the enclosure from any direction shall have no harmful effects |
| 6 | Water projected from powerful jets against the enclosure from any direction shall have no harmful effects |
| 7 | Ingress of water in quantities causing harmful effects shall not be possible when enclosure temporarily immersed in water under standardised conditions of pressure and time |
| 8 | Ingress of water in quantities causing harmful effects shall not be possible when enclosure continuously immersed in water under standardised conditions which are more severe than numeral 7 |

TRIPLE HAMMER



The triple hammer has three anvils, making three impacts per rotation instead of the conventional two. This results in reduced vibration and greater comfort with less screw head slippage (cam-out). It works great for light-duty applications such as fastening short or thin screws. To suit various applications, a 4-step tightening mode selector function is also incorporated.

| 4-Step Tightening Mode Selector | |
|---------------------------------|--|
| | Soft Mode 3 impacts per rotation (when tightening smaller diameter screws or bolts) |
| | Normal Mode 3 impacts per rotation (when tightening medium to larger diameter screws or bolts) |
| | Power Mode 1.5 impacts per rotation (only when under heavy load) |
| | Self Drilling Screw Mode 3 Impacts per rotation |



CONVENTIONAL
2pcs Hammer claw
2 hitting points



TRIPLE HAMMER
3pcs Hammer claw
3 hitting points

At HiKOKI we believe that not only the design and overall look and feel of each power tool contribute to increased comfort and ease of use. It is the technology inside that makes the next power tool and job for the professional even better than before.

Li-ion

Lithium Ion (Li-ion) Batteries

Experience less weight and more run time with HiKOKI Lithium-ion batteries. Weighing up to 40% less than their Ni-Cd and Ni-MH counterparts, these lightweight batteries make for lighter tools with greater operator portability. Each Lithium-ion cell can store considerably more energy than older style battery technology giving you considerably increased run time. They are good for the job and your business.



UVP

USER VIBRATION PROTECTION

User Vibration Protection (UVP)

Our policy is to design tools with maximum inbuilt protection against excessive vibration, whether equipping them with spring-operated dynamic vibration absorbers or building-in special, vibration-absorbing handles. Not only is UVP good for operator safety by helping to safeguard against White Knuckle Syndrome, but it is also good for business. After all, the higher the degree of comfort and ease of use, the more efficient an operator can be for longer.



LVH

LOW VIBRATION HANDLE

Low Vibration Handle (LVH)


Designed as a dual-action system, the upper handle section houses a coiled spring and counterbalance weight while the lower section employs a specially designed hinge to help minimise vibration. Reducing vibration also helps reduce operator fatigue which helps extend usage time.






Multiple Protection Circuit (MPC)

A very clever feature of HiKOKI Li-ion batteries. MPC protects against battery failure and protects the tool it's powering by guarding against overheating and overloading. Plus, the multiple protection cell continuously monitors every cell in the battery. In the event of a jam or overload, MPC overload protection stops the tool instantly. MPC also extends battery life by protecting against over charge and over discharge.

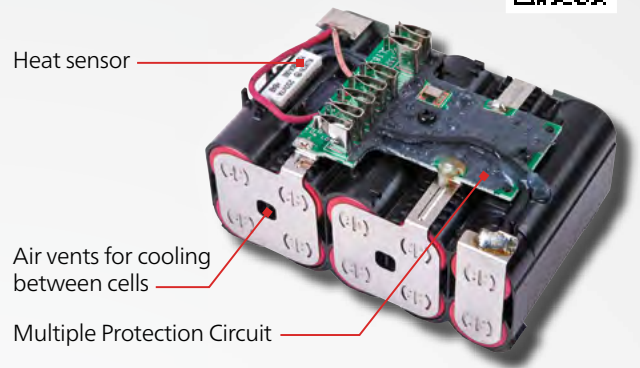

Aluminium Housing Body (AHB)

Aluminium Housing Body (AHB) is the feature to look for when you want outstandingly robust and highly durable power tools. In effect, the motor is shielded by a double protective armour consisting of a stator holder contained within a die-cast outer AHB. This results in the durability of both the motor and the tool body are remarkably improved. AHB is only available on selected HiKOKI tools.

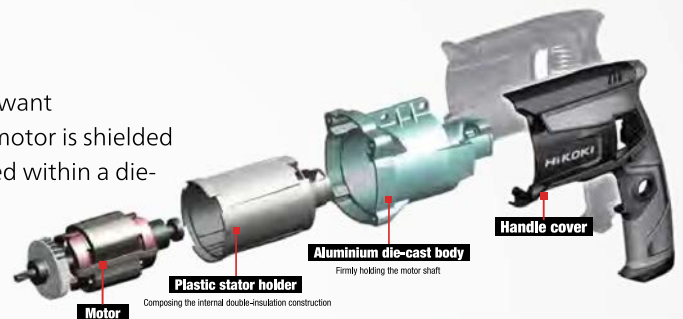

Reactive Force Control (RFC)


With HiKOKI Power Tools your safety and well-being come first. Reactive Force Control (RFC) has been developed and designed to sense when a tool bit is overburdened suddenly during operation.

When such an event occurs, RFC stops the motor instantly to reduce dangerous twisting and jerking of the main unit helping to safeguard operator safety.




Auto Mode

Auto Mode is the intelligent electronic process that works in conjunction with HiKOKI cordless brushless motors. Auto Mode conserves energy and regulates power based on need, automatically adjusting power as the load increases or decreases. Auto Mode works to optimise operation by reducing vibrations and operating noise and helping increase battery run time.

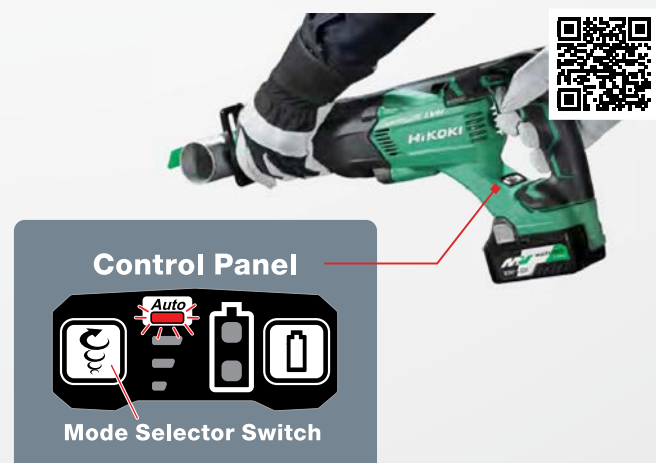

One System.

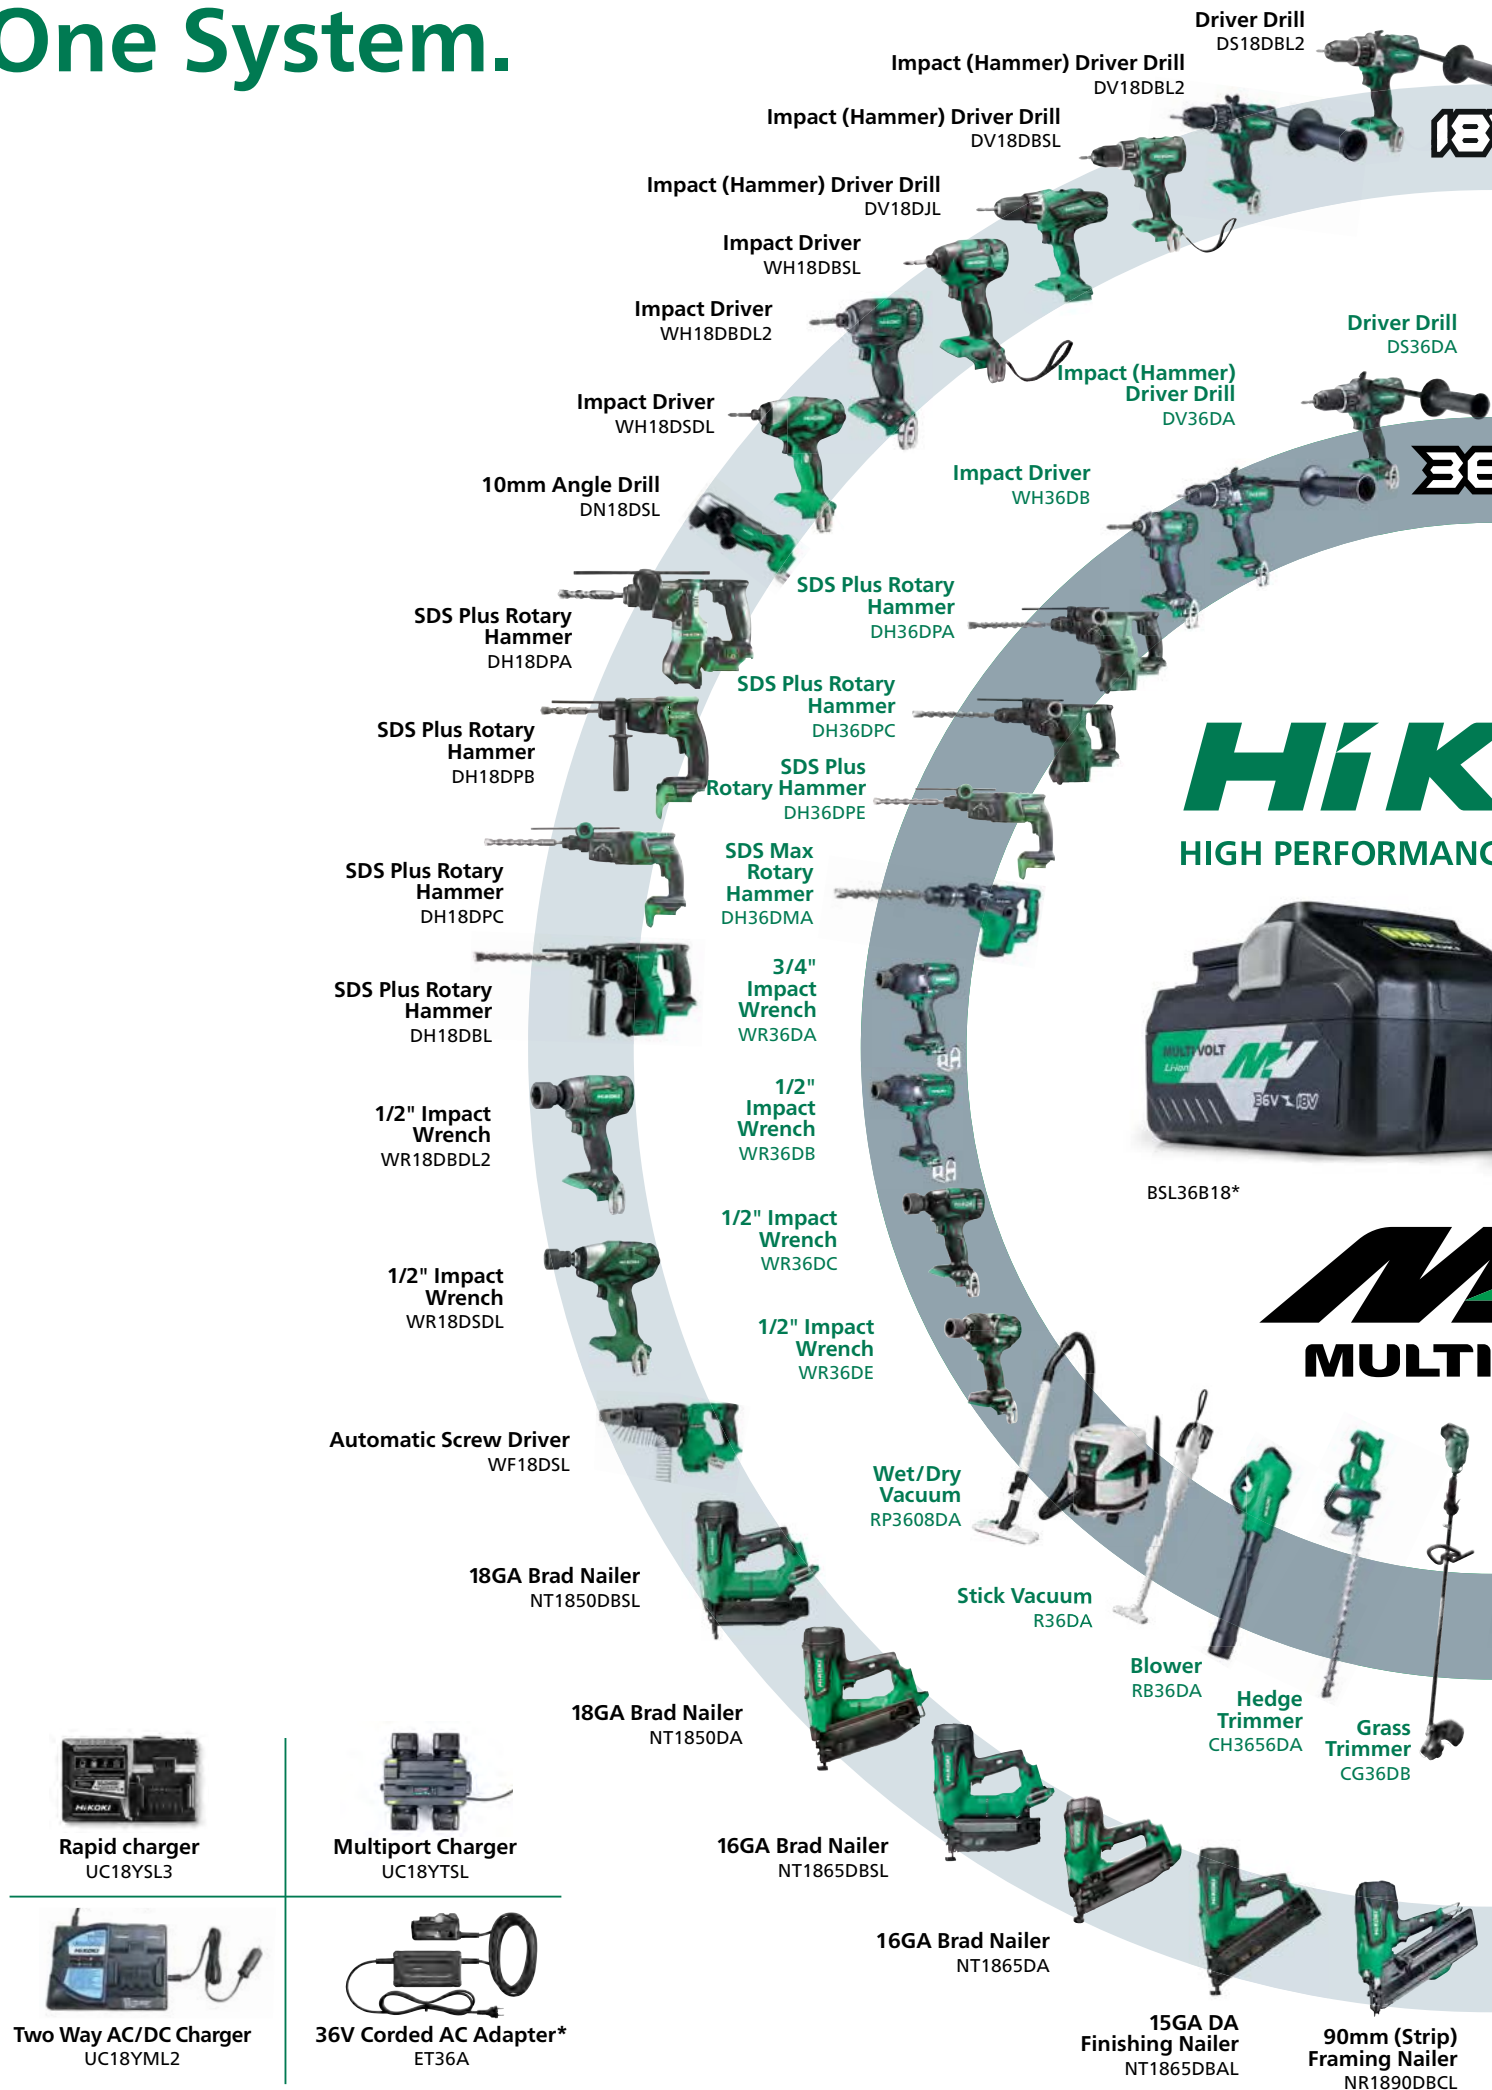

One Solution.



[hikokipowertools.com.au](https://www.hikokipowertools.com.au)

*Check website for a list of compatible models



6 YEAR
POWER TOOLS
WARRANTY*

OUR BEST WARRANTY EVER. GUARANTEED.

Get your work done faster and easier, safe in the knowledge HiKOKI Power Tools are manufactured to exacting, world class standards. All backed by the peace of mind of our industry-leading **6 Year Warranty**.* It's one more reason why you can have complete confidence in the tools you use, and the company who backs them. HiKOKI has over 70 years of power tool experience and an unmatched track record of innovation as Hitachi. Visit hikokipowertools.com.au

*6 year warranty on selected products with online registration. End user must register online to obtain 6 years warranty offer. For details visit www.hikokipowertools.com.au

HiKOKI
HIGH PERFORMANCE POWER TOOLS

01 Cordless



DS36DA(HRZ) 36V Brushless Driver Drill

Available Kit and Naked



- RFC (Reactive Force Control)
- 2 speed gearbox with all metal gears
- 13mm all metal keyless chuck
- 22 stage adjustable clutch

Specifications

| | | |
|---------------|--|-------|
| Capacity | Wood | 102mm |
| | Steel | 16mm |
| No load speed | 0 - 500 / 0 - 2,100 (min ⁻¹) | |
| Max. torque | Hard | 138Nm |
| | Soft | 64Nm |
| Weight | 2.7kg (with BSL36A18 battery) | |



Naked: DS36DA(H4Z)



| | |
|----------------------|---|
| Length | 204mm |
| Battery type | BSL36A18 : Li-ion MultiVolt (Battery A) |
| Standard accessories | 2 x BSL36A18 MultiVolt batteries, UC18YSL3 rapid charger, side handle, belt hook, driver bit and stackable case |

DV36DA(HRZ) 36V Brushless Impact (Hammer) Driver Drill

Available Kit and Naked



- RFC (Reactive Force Control)
- 2 speed gearbox with all metal gears
- 13mm all metal keyless chuck
- 22 stage adjustable clutch

Specifications

| | | |
|---------------------|--|-------|
| Capacity | Masonry | 20mm |
| | Wood | 102mm |
| | Steel | 16mm |
| No load speed | 0 - 500 / 0 - 2,100 (min ⁻¹) | |
| No load impact rate | 0 - 31,500 (min ⁻¹) | |
| Max. torque | Hard | 138Nm |
| | Soft | 64Nm |



Naked: DV36DA(H4Z)



| | |
|----------------------|---|
| Weight | 2.7kg (with BSL36A18 battery) |
| Length | 204mm |
| Battery type | BSL36A18 : Li-ion MultiVolt (Battery A) |
| Standard accessories | 2 x BSL36A18 MultiVolt batteries, UC18YSL3 rapid charger, side handle, belt hook, driver bit and stackable case |

WH36DB(HRZ) 36V Brushless Impact Driver

Available Kit and Naked



- Triple hammer anvil reduces vibration and "cam-out"
- IP56 dust and water resistant
- 4 step tightening mode selector
- Exceptional ergonomics

Specifications

| | | |
|---------------|------------------------|--------------------------------|
| Capacity | Bolt | M5 - M18 |
| | High tension bolt | M5 - M14 |
| | Screw | M4 - M10 |
| Max. torque | 210Nm | |
| No load speed | Soft mode | 0 - 900 (min ⁻¹) |
| | Normal mode | 0 - 2,900 (min ⁻¹) |
| | Power mode | 0 - 2,900 (min ⁻¹) |
| | S mode (Self drilling) | 0 - 2,900 (min ⁻¹) |
| | | |



Naked: WH36DB(H4Z)



| | | |
|----------------------|--|--------------------------------|
| Impact rate | Soft mode | 0 - 2,000 (min ⁻¹) |
| | Normal mode | 0 - 4,100 (min ⁻¹) |
| | Power mode | 0 - 4,100 (min ⁻¹) |
| | S mode (Self drilling) | 0 - 2,200 (min ⁻¹) |
| | | |
| Weight | 1.6kg (with BSL36A18 battery) | |
| Length | 127mm | |
| Battery type | BSL36A18 : Li-ion MultiVolt (Battery A) | |
| Standard accessories | 2 x BSL36A18 MultiVolt batteries, UC18YSL3 rapid charger, belt hook and stackable case | |

DH36DPE(H4Z) 36V Brushless SDS Plus Rotary Hammer with Pistol-Grip Handle

Available Naked Only



4966376334865

- RFC (Reactive Force Control)
- User Vibration Protection (UVP)
- 3 mode: rotation + hammering, hammer only and rotation only
- 2 mode speed adjustment



Specifications

| | | |
|---------------|----------------------------|------|
| | Masonry | 28mm |
| Capacity | Wood | 32mm |
| | Steel | 13mm |
| No load speed | 950 (min ⁻¹) | |
| Impact rate | 4,300 (min ⁻¹) | |

| | |
|--------------------------------|--|
| Weight | 2.9kg (without battery) |
| Length | 368mm |
| Battery type (Sold separately) | Compatible with HiKOKI MultiVolt batteries |
| Standard accessories | Side handle and depth gauge. Batteries and charger available separately |

DH36DPC(HRZ) 36V Brushless SDS Plus Rotary Hammer with Quick Release Chuck

Available Kit and Naked



4966376307999

- RFC (Reactive Force Control)
- 3 mode: rotation + hammering, hammer only and rotation only
- Electronic 4 mode speed adjustment
- Quick release chuck allows switching between SDS plus and 13mm keyless
- Neutral lever allows for multiple chisel positions
- Optional dust extraction unit 402934



Naked: DH36DPC(H4Z)



4966376307982

Specifications

| | | |
|---------------|--------------------------------|------|
| | Masonry | 28mm |
| Capacity | Wood | 32mm |
| | Steel | 13mm |
| No load speed | 0 - 1,100 (min ⁻¹) | |
| Impact rate | 0 - 4,300 (min ⁻¹) | |
| Impact energy | 2.9j | |

| | |
|----------------------|--|
| Chuck type | Quick release SDS Plus / Quick release 13mm metal keyless chuck |
| Weight | 4.2kg (with BSL36A18 battery) |
| Length | 383mm |
| Battery type | BSL36A18 : Li-ion MultiVolt (Battery A) |
| Standard accessories | 2 x BSL36A18 MultiVolt batteries, UC18YSL3 rapid charger, side handle, depth gauge and stackable case. Drill bit not included. |

DH36DPA(H4Z) 36V Brushless SDS Plus Rotary Hammer

Available Naked Only



4966376329298

- RFC (Reactive Force Control)
- 3 mode: rotation + hammering, hammer only and rotation only
- Electronic 4 mode speed adjustment
- Neutral lever position allows for multiple chisel bits
- Optional dust extraction unit 402934



Specifications

| | | |
|---------------|--------------------------------|------|
| | Masonry | 28mm |
| Capacity | Wood | 32mm |
| | Steel | 13mm |
| No load speed | 0 - 1,100 (min ⁻¹) | |

| | |
|----------------------|--|
| Impact rate | 0 - 4,300 (min ⁻¹) |
| Impact energy | 2.9j |
| Length | 400mm |
| Weight | 4.2kg (Without battery) |
| Standard accessories | Side handle and depth gauge. Batteries and charger available separately |

DH36DMA(HAZ) 36V Brushless SDS Max Rotary Hammer

Available Kit and Naked



- 8.5 joules high impact energy
- 2 mode: rotation + hammering and hammer only
- Electronic 4 mode speed adjustment
- Neutral lever allows for multiple chisel positions
- LVH (Low Vibration Handle)
- RFC (Reactive Force Control)

**Specifications**

| | | |
|----------------------|---|-------|
| Capacity | Concrete - drill bit | 40mm |
| | Concrete - core bit | 105mm |
| No load speed | 260 - 590 (min ⁻¹) | |
| Impact rate | 1,420 - 2,860 (min ⁻¹) | |
| Impact energy | 8.5j | |
| Chuck type | SDS Max | |
| Weight | 7.9kg (with BSL36B18 battery) | |
| Length | 484mm | |
| Battery type | BSL36B18: Li-ion MultiVolt (Battery B) | |
| Standard accessories | 2 x BSL36B18 MultiVolt batteries, UC18YSL3 rapid charger, side handle, depth stopper, grease pack and carry case. Drill bit not included. | |



Naked: DH36DMA(H2Z)

**WR36DE(H4Z)** 36V Brushless 12.7mm (1/2") Impact Wrench

Available naked only



- 770Nm maximum tightening torque
- IP56 dust and water resistant
- 4 step tightening mode selector
- Highly durable hammer case

**Specifications**

| | | |
|--------------------------------|--|---------------------------------|
| Capacity | Ordinary bolt | M10-M24 (3/8" to 1") |
| | High-strength bolt | M10-M20 (3/8" to 3/4") |
| Tightening torque*1 | 770Nm | |
| No load speed | High mode | 0 to 2,400 (min ⁻¹) |
| | Medium mode | 0 to 2,100 (min ⁻¹) |
| | Low2 mode | 0 to 1,800 (min ⁻¹) |
| | Low1 mode | 0 to 1,500 (min ⁻¹) |
| Impact rate | High mode | 0 to 3,400 (min ⁻¹) |
| | Medium mode | 0 to 3,000 (min ⁻¹) |
| | Low2 mode | 0 to 2,600 (min ⁻¹) |
| | Low1 mode | 0 to 2,200 (min ⁻¹) |
| Weight | 1.9kg (without battery) | |
| Length | 169mm | |
| Battery type (Sold separately) | Compatible with HiKOKI MultiVolt batteries | |

WR36DC(HRZ) 36V Brushless 12.7mm (1/2") Impact Wrench

Available Kit and Naked



- 320Nm maximum tightening torque
- IP56 dust and water resistant
- 5 step tightening mode selector
- Exceptional ergonomics



Naked: WR36DC(H4Z)



Specifications

| | | |
|------------------------|---------------|---------------------------------|
| Capacity | Ordinary bolt | M10 - M20 |
| | High-strength | M10 - M16 |
| Tightening Torque | | 320Nm |
| No-load rotation speed | Wood mode | 0 to 3,000 (min ⁻¹) |
| | High mode | 0 to 2,800 (min ⁻¹) |
| | Medium mode | 0 to 2,000 (min ⁻¹) |
| | Low mode | 0 to 1,050 (min ⁻¹) |
| | Single mode | 0 to 2,800 (min ⁻¹) |

Impact Rate

| | |
|--------------|---------------------------------|
| Wood mode | 0 to 4,000 (min ⁻¹) |
| High mode | 0 to 3,800 (min ⁻¹) |
| Medium mode | 0 to 2,900 (min ⁻¹) |
| Low mode | 0 to 1,350 (min ⁻¹) |
| Single mode* | 0 to 3,800 (min ⁻¹) |

| | |
|----------------------|---|
| Weight | 1.9kg (with BSL36A18 battery) |
| Dimensions (L x H) | 145 x 244mm |
| Battery type | BSL36A18 : Li-ion MultiVolt (Battery A) |
| Standard accessories | 2 x BSL36A18 MultiVolt batteries, UC18YSL3 rapid charger, belt hook and stackable case. Socket not included |

WR36DB(HRZ) 36V Brushless High Torque 12.7mm (1/2") Impact Wrench

Available Kit and Naked



- 1,650Nm high torque performance
- IP56 dust and water resistant
- 4 step tightening mode selector
- Highly durable hammer case



Naked: WR36DB(H4Z)



Specifications

| | | |
|---------------|-------------------|--------------------------------|
| Capacity | Bolt | M12 - M30 |
| | High tension bolt | M10 - M24 |
| Max. torque | Tightening | 1,050Nm |
| | Nut busting | 1,650Nm |
| Square drive | 12.7mm (1/2") | |
| No load speed | High mode | 0 - 1,500 (min ⁻¹) |
| | Medium mode | 0 - 1,200 (min ⁻¹) |
| | Low2 mode | 0 - 900 (min ⁻¹) |
| | Low1 mode | 0 - 600 (min ⁻¹) |

Impact rate

| | |
|-------------|--------------------------------|
| High mode | 0 - 2,800 (min ⁻¹) |
| Medium mode | 0 - 2,300 (min ⁻¹) |
| Low2 mode | 0 - 1,800 (min ⁻¹) |
| Low1 mode | 0 - 1,200 (min ⁻¹) |

| | |
|----------------------|---|
| Weight | 3.7kg (with BSL36A18 battery) |
| Length | 221mm |
| Battery type | BSL36A18 : Li-ion MultiVolt (Battery A) |
| Standard accessories | 2 x BSL36A18 MultiVolt batteries, UC18YSL3 rapid charger, belt hook and stackable case. Socket not included |

WR36DA(HRZ) 36V Brushless High Torque 19mm (3/4") Impact Wrench

Available Kit and Naked



- 1,800Nm high torque performance
- IP56 dust and water resistant
- 4 step tightening mode selector
- Highly durable hammer case



Naked: WR36DA(H4Z)



Specifications

| | | |
|---------------|-------------------|--------------------------------|
| Capacity | Bolt | M12 - M30 |
| | High tension bolt | M10 - M24 |
| Max. torque | Tightening | 1,100Nm |
| | Nut busting | 1,800Nm |
| Square drive | 19mm (3/4") | |
| No load speed | High mode | 0 - 1,500 (min ⁻¹) |
| | Medium mode | 0 - 1,200 (min ⁻¹) |
| | Low2 mode | 0 - 900 (min ⁻¹) |
| | Low1 mode | 0 - 600 (min ⁻¹) |

Impact rate

| | |
|-------------|--------------------------------|
| High mode | 0 - 2,900 (min ⁻¹) |
| Medium mode | 0 - 2,300 (min ⁻¹) |
| Low2 mode | 0 - 1,800 (min ⁻¹) |
| Low1 mode | 0 - 1,200 (min ⁻¹) |

| | |
|----------------------|---|
| Weight | 3.7kg (with BSL36A18 battery) |
| Length | 221mm |
| Battery type | BSL36A18 : Li-ion MultiVolt (Battery A) |
| Standard accessories | 2 x BSL36A18 MultiVolt batteries, UC18YSL3 rapid charger, belt hook and stackable case. Socket not included |

G3613DA(HRZ) 36V Brushless 125mm Angle Grinder with Slide Switch

Available Kit and Naked



- Auto mode function
- Fast brake system stops the disc within 2 seconds
- Soft start, kickback reduction, restart protection
- Variable speed dial
- Compact grip circumference

Specifications

| | | |
|----------------|-------------------------------|----------------------------------|
| Wheel diameter | 125mm | |
| Switch type | Slide | |
| No load speed | Auto mode | 5,500 (min ⁻¹) |
| | Standard mode | 3,000-9,500 (min ⁻¹) |
| Spindle thread | M14 x 2 | |
| Weight | 2.8kg (with BSL36A18 battery) | |



Naked: G3613DA(H4Z)



| | | |
|----------------------|---|-------|
| Dimensions | Length | 358mm |
| | Height | 139mm |
| | Grip circumference | 146mm |
| Battery type | BSL36A18: Li-ion MultiVolt (Battery A) | |
| Standard accessories | 2 x BSL36A18 MultiVolt batteries, UC18YSL3 rapid charger, side handle, grinding disc, wrench and stackable case | |

G3613DB(HRZ) 36V Brushless 125mm Angle Grinder with Paddle Switch

Available Kit and Naked



- Auto mode function
- Fast brake system stops the disc within 2 seconds
- Soft start, kickback reduction, restart protection
- Variable speed dial
- Compact grip circumference

Specifications

| | | |
|----------------|-------------------------------|----------------------------------|
| Wheel diameter | 125mm | |
| Switch type | Paddle | |
| No load speed | Auto mode | 5,500 (min ⁻¹) |
| | Standard mode | 3,000-9,500 (min ⁻¹) |
| Spindle thread | M14 x 2 | |
| Weight | 2.8kg (with BSL36A18 battery) | |



Naked: G3613DB(H4Z)



| | | |
|----------------------|---|-------|
| Dimensions | Length | 358mm |
| | Height | 139mm |
| | Grip circumference | 146mm |
| Battery type | BSL36A18: Li-ion MultiVolt (Battery A) | |
| Standard accessories | 2 x BSL36A18 MultiVolt batteries, UC18YSL3 rapid charger, side handle, grinding disc, wrench and stackable case | |

G3623DA(H4Z) 36V Brushless 230mm Angle Grinder with Trigger (Deadman) Switch

Available Naked Only



- Fast brake system stops the disc within 2 seconds
- Soft start, kickback reduction, restart protection
- Compact grip circumference

Specifications

| | | |
|----------------|-------------------------|----------------------------|
| Wheel diameter | 230mm | |
| Switch type | Trigger (Deadman) | |
| No load speed | Auto mode | 3,200 (min ⁻¹) |
| | Standard mode | 5,300 (min ⁻¹) |
| Spindle thread | M14 x 2 | |
| Weight | 4.2kg (without battery) | |



| | | |
|----------------------|--|-------|
| Dimensions | Length | 531mm |
| | Height | 162mm |
| | Grip circumference | 148mm |
| Battery type | Compatible with all HiKOKI MultiVolt batteries | |
| Standard accessories | Wheel guard, wrench and side handle | |

C3607DA(HRZ) 36V Brushless 185mm Circular Saw

Available Kit and Naked



- Electric brake
- Rotation speed change over function: Power mode/Silent mode
- Compact and lightweight
- Kickback mitigation



Naked: C3607DA(H4Z)



Specifications

| | | |
|----------------------|---|----------------------------|
| Capacity | Max. of depth cut: 90° | 62mm |
| | Max. of depth cut: 45° | 47.5mm |
| No load speed | Power mode | 4,300 (min ⁻¹) |
| | Silent mode | 2,000 (min ⁻¹) |
| Blade diameter | 185mm | |
| Angle cutting | -5° - 45° | |
| Weight | 4.1kg (with BSL36A18 battery) | |
| Dimensions | Length | 318mm |
| | Width | 204mm |
| | Height | 267mm |
| Battery type | BSL36A18 : Li-ion MultiVolt (Battery A) | |
| Standard accessories | 2 x BSL36A18 MultiVolt batteries, UC18YSL3 rapid charger, blade, guide and stackable case | |

C3607DRA(H4Z) 36V Brushless 185mm Slide Compound Mitre Saw

Available Naked Only



- Twin belt drive for low noise and smooth cutting
- Motor head slides on fixed pipe to optimise use in narrow spaces
- Laser guide system for improved accuracy
- Twin LED light included



Specifications

| | | |
|--------------------------|---------------------------|------------|
| Maximum Cutting Capacity | 0° (Right Angle) | 58 x 310mm |
| | Mitre Right / Left 45° | 58 x 218mm |
| | Bevel Left 45° | 39 x 310mm |
| | Bevel Right 45° | 16 x 310mm |
| Capacity | Mitre Angle: Left | 0 - 45° |
| | Mitre Angle: Right | 0 - 57° |
| | Bevel Angle: Left & Right | 0 - 45° |

| | |
|-----------------------|--|
| No Load Speed | 4,000 (min ⁻¹) |
| Blade Diameter | 185mm |
| Weight | 14.7kg (without battery) |
| Dimension (L x W x H) | 780 x 830 x 484mm |
| Battery Type | Compatible with HIKOKI MultiVolt batteries |

C3610DRA(HAZ) 36V Brushless 255mm Slide Compound Mitre Saw

Available Kit and Naked



- Lightweight for easy transport
- Laser line for accurate and easy cutting
- Soft start reduces recoil force at motor start up for user safety
- LED light included
- Positive mitre stops for quick and easy adjustment



Naked: C3610DRA(H4Z)



Specifications

| | | |
|--------------------------|------------------------|------------|
| Maximum Cutting Capacity | 0° (Right Angle) | 89 x 292mm |
| | Mitre Right / Left 45° | 89 x 204mm |
| | Bevel Left 45° | 45 x 292mm |
| | Bevel Right 45° | 25 x 292mm |

| | | |
|-----------------------|---|----------------------------------|
| Capacity | Mitre Angle | 0 - 48° (Left & Right) |
| | Bevel Angle | 0 - 55° (Left) & 0 - 60° (Right) |
| | Positive Mitre Stop | 0°, 15°, 22.5°, 31.6°, 45° |
| No Load Speed | 4,000 (min ⁻¹) | |
| Blade Diameter | 255mm | |
| Blade Bore | 25.4mm | |
| Weight | 20.6kg (with battery) | |
| Dimension (L x W x H) | 792 x 778 x 686mm | |
| Standard Accessories | 2 x BSL36A18 MultiVolt batteries, UC18YSL3 rapid charger, TCT Saw Blade 255mm, Dust Bag, Vice Assembly, Support Rods, 5mm Screws, 13mm Wrench | |



C3610DRJ(H4Z) 36V Brushless 254mm Table Saw

Available Naked Only



- Equipped with adjustable rip fence and support table
- Brushless motor
- Power source either MultiVolt battery or ET36A AC Adaptor (sold separately).
- Same cutting capacity as AC table saw

Specifications

| | | |
|-----------------------|-------------------------------|-------|
| Motor Type | Brushless | |
| No load speed | 5,000 (min ⁻¹) | |
| Motor Size | 86mm x 40mm | |
| Blade Diameter | 254mm | |
| Max Capacity | Cutting Depth (90°) | 79mm |
| | Cutting Depth (40°) | 57mm |
| | Rip fence ext. length (right) | 880mm |
| | Rip fence ext. length (left) | 440mm |
| | Width of dado | 20mm |
| Bevel Range | 0 - 45° | |
| Table size (L x W) | 730 x 559mm | |
| Dimension (L x W x H) | 915 x 765 x 375mm | |
| Weight | 29.5kg (without battery) | |



374769 Stand assembly
Sold separately

CJ36DA(H2Z) 36V Brushless Jig Saw with Top Handle

Available Naked Only



4966376331048

- Auto mode
- Tool-less blade changing system
- 4-stage orbital operation



Specifications

| | | |
|------------------|-----------------|------------------------------------|
| Cutting Capacity | Wood | 160mm |
| | Mild Steel | 10mm |
| | Stainless Steel | 3.2mm |
| No load speed | Standard Mode | 800 - 3,500 (min ⁻¹) |
| | Auto Mode | 1,400 - 3,500 (min ⁻¹) |
| Stroke | | 26mm |

| | |
|------------------------|----------------------------|
| Minimum Cutting Radius | 25mm |
| Maximum Cutting Angle | 45° (right and left) |
| Type of Switch | Trigger (with ON-OFF lock) |
| LED Light | White LED |
| Weight | 2kg (without battery) |
| Dimensions (L x H) | 277 x 206mm |

CJ36DB(H2Z) 36V Brushless Jig Saw with Barrel Handle

Available Naked Only



4966376331147

- Auto mode
- Tool-less blade changing system
- 4-stage orbital operation



Specifications

| | | |
|------------------|-----------------|------------------------------------|
| Cutting Capacity | Wood | 160mm |
| | Mild Steel | 10mm |
| | Stainless Steel | 3.2mm |
| No load speed | Standard Mode | 800 - 3,500 (min ⁻¹) |
| | Auto Mode | 1,400 - 3,500 (min ⁻¹) |
| Stroke | | 26mm |

| | |
|------------------------|-----------------------|
| Minimum Cutting Radius | 25mm |
| Maximum Cutting Angle | 45° (right and left) |
| Type of Switch | Slide switch |
| LED Light | White LED |
| Weight | 2kg (without battery) |
| Dimensions (L x H) | 299 x 175mm |

CR36DA(HGZ) 36V Brushless Reciprocating Saw

Available Kit and Naked



4966376324835

- 4 step speed selection switch
- Orbital & straight blade cutting function
- Twin rotating counterweight system
- LED Light
- Large pivot hook



Naked: CR36DA(H4Z)



4966376324828

Specifications

| | | |
|---------------|--|-------|
| Capacity | Pipe | 130mm |
| | Wood | 300mm |
| | Steel plate | 19mm |
| No load speed | 0-1,700 / 0-2,000 / 0-2,500 / 0-3,000 (min ⁻¹) | |
| Stroke length | 32mm | |

| | |
|----------------------|--|
| Weight | 4.5kg (including BSL36A18 battery) |
| Length | 457mm |
| Battery type | BSL36A18: Li-ion MultiVolt (Battery A) |
| Standard accessories | 2 x BSL36A18 MultiVolt batteries, UC18YSL3 rapid charger, Blade and moulded carry case |

NEW



Bit and battery
sold separately.

M3612DA(H4Z) 36V Brushless Router

Available Naked Only



4966376335916

- Variable speed control
- Easy access ON/OFF switch
- Brake control
- LED light

| Specifications | |
|-----------------------|---|
| Collet chuck capacity | 6.35mm, 8mm, 12.5mm or 1/4", 1/2" |
| Main body stroke | 50mm |
| No load speed | 11,000-25,00 (min ⁻¹) |
| Dimension (L x H x W) | 148 x 280 x 275mm |
| Weight | 3.1 kg (without battery) |
| Standard accessories | 23mm wrench, straight guide assembly, dust collector set, template guide, chuck sleeve, 6.35mm or 1/4" collet chuck |

VB3616DA(HGZ) 36V Brushless Rebar Cutter & Bender

Available Kit Only



4966376331772

- Reverse rotation mode for precision angle alignment
- 4 angle settings from 45° to 180°
- Brushless motor
- Replacement Cutter Set: 319706

Specifications

| | | |
|---------------------------------|---|------------|
| Capacity | Rebar material yield strength 460 N/mm ² (47kg/mm ²) max | |
| | Max rebar diameter 16mm | |
| No of Possible Rebars at a time | Cutting | 10mm max 2 |
| | | 12mm max 1 |
| | | 16mm max 1 |
| | Bending | 10mm max 3 |
| | | 12mm max 2 |
| | | 16mm max 1 |



| | | |
|------------------------------|---|------------|
| Bending Angle | 0° to 180° (stepless) | |
| No-load speed | 0 to 16min ⁻¹ | |
| Speed | Cutting | 2.6 sec |
| | Bending | 3.8 sec |
| No. of operations per charge | Cutting | 170 approx |
| | Bending | 310 approx |
| Weight | 18.9kg | |
| Dimensions (L x W x H) | 510 x 230 x 241mm | |
| Standard accessories | 2 x BSL36A18 MultiVolt batteries, UC18YSL3 rapid charger and case | |

UV3628DA(HRZ) 36V Brushless Concrete Vibrator

Available Kit and Naked



9323624000586

- Two power mode selection (normal/power)
- Three dust protective cover (switch stopper, switch and battery)
- Flexible shaft assembly
- Ergonomically designed grip handle



NEW

Specifications

| | | |
|-----------------------------|--------|-----------------------------|
| Vibrating rod diameter | 28mm | |
| Vibrating rod length | 824mm | |
| No load vibration frequency | Normal | 12,000 (min ⁻¹) |
| | Power | 15,200 (min ⁻¹) |

| | |
|----------------------|--|
| Dimension (L x H) | 1045 x 224mm |
| Weight | 3.5kg (without battery) |
| Standard accessories | 2 x BSL36A18 MultiVolt batteries, UC18YSL3 rapid charger |



Naked: UV3628DA(H4Z)

4966376337620

UM36DA(HRZ) 36V Brushless Mixer

Available Kit and Naked



9323624000593

- Two-speed rotational mode settings
- Dust protector cover
- Soft start function
- Safety lock on/off switch



NEW

Specifications

| | | |
|-----------------------|----------------------|------------------------------|
| Mixing screw diameter | 200mm | |
| Spindle thread | M14 | |
| Type of switch | Trigger with stopper | |
| No-load Speed | High | 0-1,200 (min ⁻¹) |
| | Low | 0-500 (min ⁻¹) |

| | |
|------------------------|--|
| Dimensions (L x H x W) | 929 x 224 x 109mm |
| Weight | 5.2kg (without Battery) |
| Standard accessories | 2 x BSL36A18 MultiVolt batteries, UC18YSL3 rapid charger, 200mm diameter screw (A5), Shaft (A2), Hex. Nut (M14), Side handle, 17/19mm and 17/22mm wrench |



Naked: UV3628DA(H4Z)

4966376338238

CG36DB(H4Z) 36V Grass Trimmer with Loop Handle

Available Naked Only



- Powerful motor for efficient cutting
- Well balanced for greater user comfort
- 3 stage speed trigger switch (High/Mid/Eco)
- Comfort grip loop handle

**NEW**

| | | |
|---------------------|------|----------------------------|
| No-load Speed | High | 6,500 (min ⁻¹) |
| | Mid | 5,500 (min ⁻¹) |
| | Eco | 4,000 (min ⁻¹) |
| Run time per charge | High | 39 minutes* |
| | Mid | 70 minutes* |
| | Eco | 121 minutes* |
| Handle Type | Loop | |

| | |
|----------------------|--|
| No-load noise level | 82dB (A) |
| Switch Control | Panel |
| Vibration Level | 5.6m/s ² |
| Weight | 4.1kg (without battery) |
| Standard accessories | Nylon head, guard, 4mm hex. bar wrench, 17/19 hex. socket, shoulder belt assembly and protective glasses |

*Time will vary depending on grass type, temperature, battery condition. This is a guide only.

CH3656DA(H4Z) 36V Hedge Trimmer

Available Naked Only



- High cutting performance
- Triple edge blade for a finer cut
- Slim grip handle and wide sub handle for greater control

**Specifications**

| | |
|-------------------------|-------------------------------------|
| Blade length | 560mm |
| No-load vibration level | 4.3m/s ² |
| No-load noise level | 72dB (A) |
| Number of strokes | 1,000 to 1,500 (min ⁻¹) |
| Speed control | 4 stage (button type) |
| Blade assembly | Triple-edged x 2 |

| | |
|------------------------|---|
| Charging Time | 32mins |
| Run Time | 62.5 to 105min (depending on operation) |
| Dimensions (L x H x W) | 1088 x 176 x 239mm |
| Weight | 3.4kg (without battery) |
| Standard Accessories: | Blade case |

RB36DA(H4Z) 36V Brushless Blower

Available Naked Only



- Powerful air volume
- 4 mode switch and turbo mode
- Compact and well-balanced

**Specifications**

| | | |
|----------------------------|------------|------------|
| Speed (min ⁻¹) | Mode 1 | 0 - 14,000 |
| | Mode 2 | 0 - 16,500 |
| | Mode 3 | 0 - 18,500 |
| | Mode 4 | 0 - 20,500 |
| | Turbo Mode | 0 - 24,000 |

| | |
|----------------------------|-------------------------------|
| Air Volume ^{*1} | 680m ³ /h (400CFM) |
| Air Velocity ^{*1} | 45m/s (101 MPH) |
| Weight | 2.5kg (with round nozzle) |
| Dimensions (L x W x H) | 940 x 242 x 267mm |
| Standard accessories | Round nozzle |

CS3630DA(H4Z) 36V 300mm Chain Saw

Available Naked Only



- High cutting performance per charge
- LED light indicator
- Mechanical kick-back brake
- Compact rear handle design for greater control



Specifications

| | |
|----------------------------|---------------------|
| Guide bar length | 300mm |
| Chain speed | 8.3m/s |
| Type of chain | 91PX 45E (Oregon) |
| Chain adjuster | Tool-less |
| Vibration level under load | 5.0m/s ² |
| Noise level under load | 87dB (A) |
| Spike | Steel |

| | |
|------------------------|--|
| Charging Time | 32mins |
| Dimensions (L x H x W) | 599 x 214 x 256mm |
| Weight | 3.6kg (without battery) |
| Standard Accessories | 4mm hex. bar wrench, chain cover and lubricant oiler |

CS3635DB(H4Z) 36V Brushless 350mm Chain Saw

Available Naked Only

NEW



- Direct drive system to reduce vibration
- Easy to adjust tension dial
- Compact rear handle design for greater control
- Highly durable
- Lightweight



Specifications

| | |
|----------------------------|---------------------|
| Guide bar length | 300mm |
| Chain speed | 14.9m/s |
| Type of chain | 90PX-052X |
| Chain adjuster | Tool-less |
| Vibration level under load | 2.4m/s ² |
| Noise level under load | 85dB (A) |

| | |
|------------------------|---|
| Spike | Steel |
| Charging Time | 25 minutes |
| Dimensions (L x H x W) | 760 x 214 x 247mm |
| Weight | 3.9kg (without battery) |
| Standard accessories | Chain cover, Lubricant oiler and 4mm Hex bar wrench |


R36DA(H4Z) 36V Brushless Stick Vacuum Cleaner

Available Naked Only



4966376335060

- High-performance suction power
- Ergonomic handle design for comfort
- Light indicator to notify if the bag is full
- Inbuilt LED light

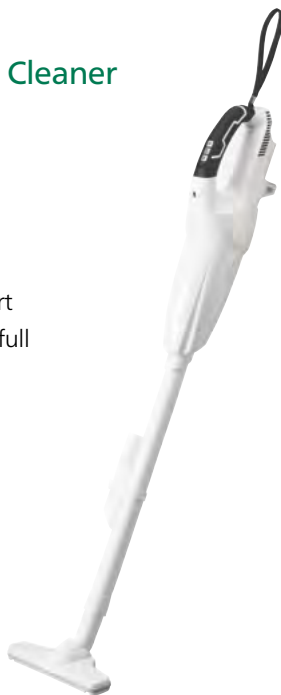

NEW

Specifications

| | | |
|-------------------------------------|---|-------------------------|
| Dust collection capacity | | 560ml |
| Suction work rate | 3 (High) | 155W |
| | 2 (Mid) | 65W |
| | 1 (low) | 35W |
| Run time (with BSL36A18 battery) | 3 (High) | 15 minutes |
| | 2 (Mid) | 30 minutes |
| | 1 (low) | 60 minutes |
| Maximum airflow rate | | 1.3 m ³ /min |
| Maximum degree of vacuum | | 22.0 kPa |
| Dimensions (LxH) | | 476 x 169mm |
| Weight | | 1.2kg (without battery) |
| Standard accessories | Flooring nozzle, extension pipe (with nozzle holder) and crevice nozzle | |

RP3608DA(H4Z) 36V Brushless Cleaner

Available Naked Only



4966376324644

- Wet & dry applications
- Equivalent suction power to AC tool
- Air blow cleaning system allows for consistent high suction power
- Brushless motor



Specifications

| | | |
|--------------------|--------|-------------------------|
| Suction Capacity | Solid | 8L |
| | Liquid | 6L |
| Input Power | | 36V |
| Maximum Air Flow | | 3.5 m ³ /min |
| Hose (ID x Length) | | 38mm x 1.5m |
| Weight | | 9.1kg (without battery) |

| | | |
|--------------------------------|---|-------|
| Dimensions | Length | 331mm |
| | Width | 382mm |
| | Height | 369mm |
| Battery Type (sold separately) | Compatible with HiKOKI MultiVolt batteries | |
| Standard Accessories | Polyethylene bag (10 pcs), crevice nozzle, nozzle for fluid & pipe assembly kit | |

MultiVolt Battery

Same size. More power.

1080W High Power Output.

The MultiVolt battery, paired with MultiVolt 36V tools offers unprecedented cordless power over 1,000W.

Compact & Lightweight.

The MultiVolt battery is almost the same size and weight as an 18V (BSL1850/BSL1860), and produces the power of a 36V.

Automatic Voltage Change between 18V and 36V.

The MultiVolt battery is designed for full compatibility with current 18V slide range, and automatically changes between 2 voltages 36V-2.5Ah and 18V-5.0Ah, according to the tool used.



KC36DBDL(HRZ) 2 Piece 36V MultiVolt Brushless Combination Pack



9323624028672

- DV36DA Brushless Impact (Hammer) Driver Drill
- WH36DB Brushless Impact Driver
- 2 x BSL36A18 MultiVolt Battery (A)
- UC18YSL3 Rapid Charger
- Stackable Carry Case



KC36DPL2(HRZ) 2 Piece 36V MultiVolt Brushless Combination Pack



9377778047805

- DV36DA Brushless Impact (Hammer) Driver Drill
- WR36DC Brushless 12.7mm Impact Wrench
- 2 x BSL36A18 MultiVolt Battery (A)
- UC18YSL3 Rapid Charger
- Stackable Carry Case



KC36DDBL(HRZ) 3 Piece 36V MultiVolt Brushless Combination Pack



9323624028689

- DV36DA Brushless Impact (Hammer) Driver Drill
- WH36DB Brushless Impact Driver
- G3613DB Brushless Angle Grinder with Paddle Switch
- 2 x BSL36A18 MultiVolt Battery (A)
- UC18YSL3 Rapid Charger
- 2 x Stackable Carry Cases



KC36DRBL2(HRZ) 3 Piece 36V MultiVolt Brushless Combination Pack



9377778047829

- DV36DA Brushless Impact (Hammer) Driver Drill
- WR36DC Brushless 12.7mm Impact Wrench
- G3613DB Brushless Angle Grinder with Paddle Switch
- 2 x BSL36A18 MultiVolt Battery (A)
- UC18YSL3 Rapid Charger
- 2 x Stackable Carry Cases



KC36D4A(HRZ) 4 Piece 36V Brushless Combination Pack



9377778047775

- DV36DA Brushless Impact (Hammer) Driver Drill
- WH36DB Brushless Ip56 Triple Hammer Impact Driver
- G3613DB Brushless 125mm Angle Grinder With Paddle Switch
- DH36DPA Brushless SDS-Plus Rotary Hammer
- 2 x BSL36A18 MultiVolt Battery (A)
- UC18YSL3 Rapid Charger
- 1 X Large Site Bag



KC36D5P(HRZ) 5 Piece 36V MultiVolt Brushless Combination Pack



9323624029228

- DV36DA Brushless Impact (Hammer) Driver Drill
- WH36DB Brushless Impact Driver
- G3613DB Brushless 125mm Angle Grinder With Paddle Switch
- C3607DA Brushless 165mm Circular Saw
- CR36DA Brushless Reciprocating Saw
- 2 x BSL36A18 MultiVolt Battery (A)
- UC18YSL3 Rapid Charger
- Premium Site Bag



KC36D8P(HRZ) 8 Piece MultiVolt Brushless Combination Pack



9323624000135

- DV36DA 36V Brushless Impact (Hammer) Driver Drill
- WH36DB 36V Brushless Impact Driver
- G3613DB 36V Brushless 125mm Angle Grinder with Paddle Switch
- DH36DPA 36V Brushless SDS Plus Rotary Hammer
- C3607DA 36V Brushless 185mm Circular Saw
- CR36DA 36V Brushless Reciprocating Saw
- UB18DA 18V Search Light
- UR18DSDL 18V Digital Radio with Bluetooth
- 2 x BSL36A18 MultiVolt Battery (A)
- UC18YSL3 Rapid Charger
- 1 X premium site bag



KC36D12P(HRZ) 12 Piece MultiVolt Brushless Combination Pack




9323624000111

- DV36DA 36V Brushless Impact (Hammer) Driver Drill
- WH36DB 36V Brushless Impact Driver
- WR36DC 36V Brushless Impact Wrench
- G3613DB 36V Brushless 125mm Angle Grinder With Paddle Switch
- DH36DPA 36V Brushless SDS Plus Rotary Hammer
- C3607DA 36V Brushless 185mm Circular Saw
- CR36DA 36V Brushless Reciprocating Saw
- CJ36DA 36V Brushless 160mm Jigsaw
- UR18DSDL 18V Digital Radio With Bluetooth
- RB18DSL 18V Blower & Vacuum (Accessories not included)
- R18DSL 18V Wet & Dry Vacuum
- UB18DA 18V Search Light
- 4 x BSL36A18 MultiVolt Battery (A)
- UC18YTSL Multiport Charger
- Premium Site Bag



It's faster
and easier
with HiKOKI

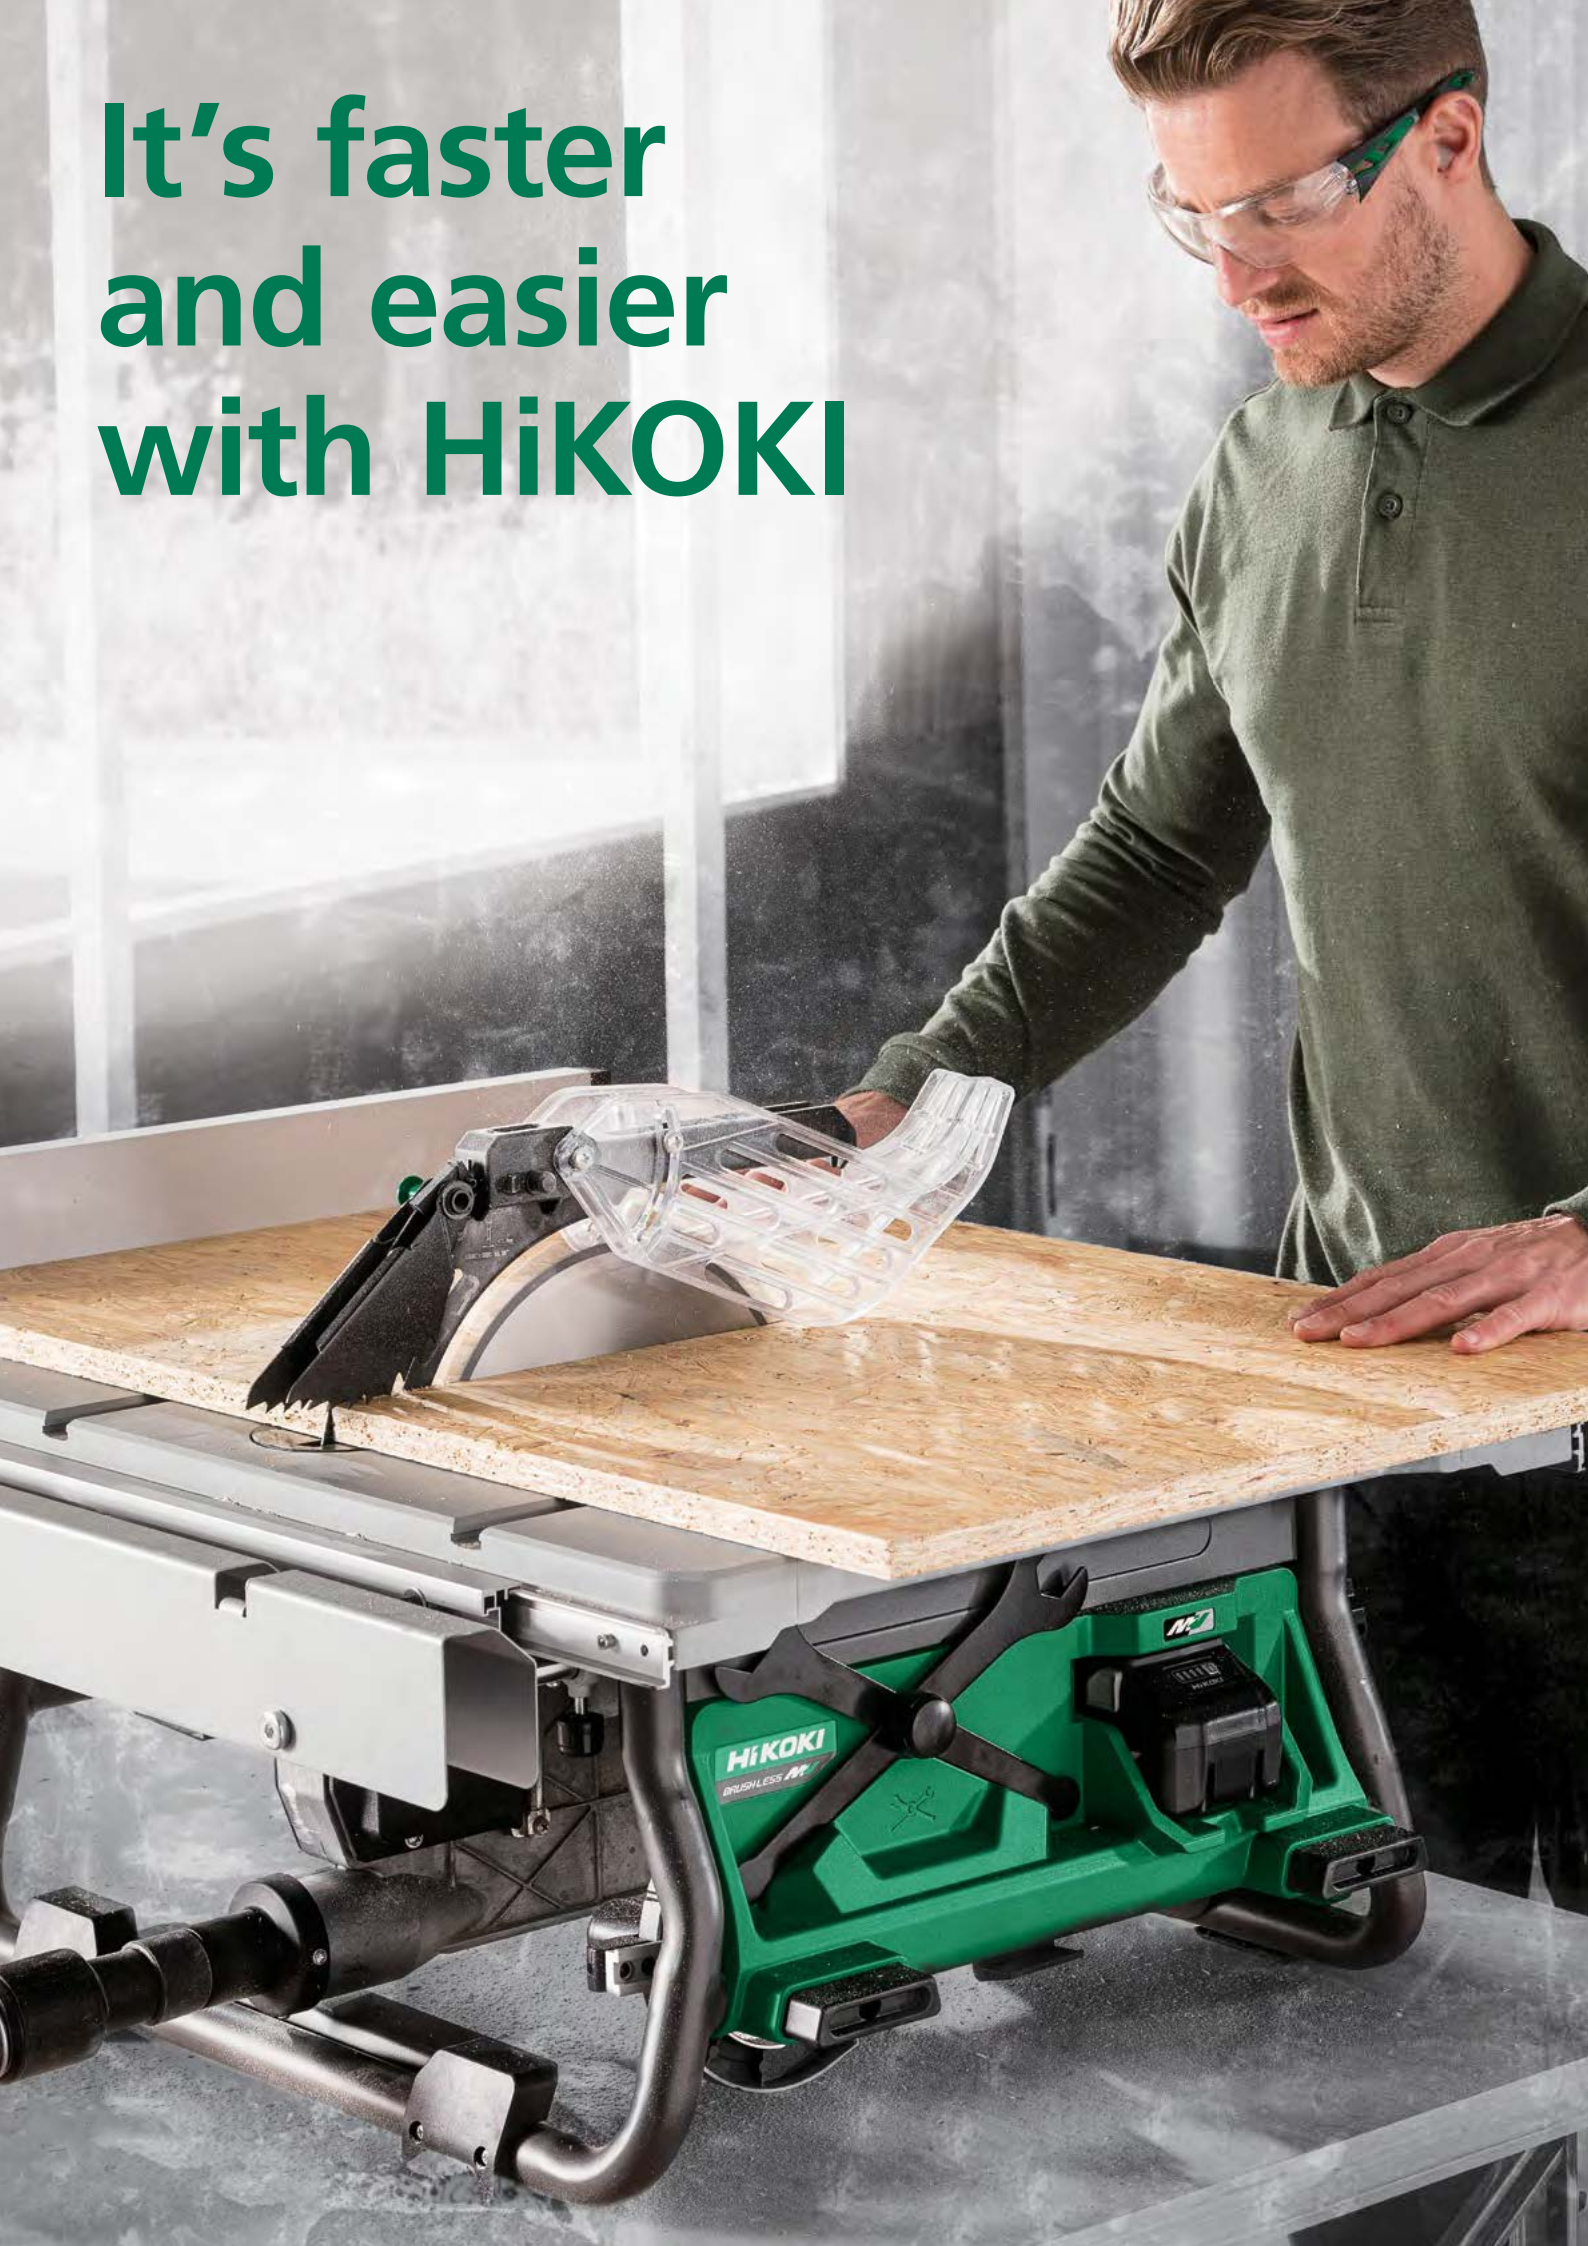

DS18DBL2(H4Z) 18V Brushless Driver Drill

Available Naked Only



- RFC (Reactive Force Control)
- 2 speed gearbox with all metal gears
- 13mm all metal keyless chuck
- 22 stage adjustable clutch

Specifications

| | | |
|---------------|--|-------|
| Capacity | Wood | 76mm |
| | Steel | 13mm |
| No load speed | 0 - 500 / 0 - 2,100 (min ⁻¹) | |
| Max. torque | Hard | 136Nm |
| | Soft | 62Nm |
| Weight | 1.8kg (without battery) | |



| | |
|--------------------------------|--|
| Length | 204mm |
| Battery type (sold separately) | Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries |
| Standard accessories | Side handle, driver bit and steel belt hook |

DV18DJL(HCZ) 18V Impact (Hammer) Driver Drill

Available Kit only



- 2 speed gearbox with all metal gears
- Compact and lightweight
- 13mm keyless chuck
- 22 stage adjustable clutch

Specifications

| | | |
|---------------------|---|------|
| Capacity | Masonry | 13mm |
| | Wood | 38mm |
| | Steel | 13mm |
| No load speed | 0 - 350 / 0 - 1,400 (min ⁻¹) | |
| No load impact rate | 0 - 4,900 / 0 - 19,600 (min ⁻¹) | |
| Max. torque | Hard | 23Nm |
| | Soft | 55Nm |



| | |
|----------------------|--|
| Weight | 1.7kg (with BSL1815 battery) |
| Length | 220mm |
| Battery type | BSL1815 1.5Ah Li-ion battery |
| Standard accessories | 2 x BSL1815 batteries, UC18YSL3 rapid charger and stackable case |

DV18DBSL(H4Z) 18V Brushless Impact Driver Drill

Available Naked Only



- 2 speed mode (Low/High)
- Easy access clutch dial
- Spindle lock function
- LED light

Specifications

| | | | |
|---------------|---------------|-----------------|---------------------------------------|
| Capacity | Driving screw | Machine | 6mm |
| | | Wood | 8mm dia x 100mm (with prepared holes) |
| | Drilling | 1.6mm Steel | 13mm |
| | | 1.6mm Aluminium | 13mm |
| No load speed | Low | 18mm Wood | 50mm |
| | | | 0-400 (min ⁻¹) |
| | | | 0-1,800 (min ⁻¹) |



NEW

| | | |
|--------------------------------|--|-----------------------------|
| Max. impact rate | Low | 6000 (min ⁻¹) |
| | High | 27,000 (min ⁻¹) |
| Dimensions (L x W x H) | 184 x 233 x 78mm | |
| Weight | 1.7kg (without battery) | |
| Battery type (sold separately) | Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries | |



DV18DBL2(H4Z) 18V Brushless Impact (Hammer) Driver Drill

Available Naked Only



4966376312214

- RFC (Reactive Force Control)
- 2 speed gearbox with all metal gears
- 13mm all metal keyless chuck
- 22 stage adjustable clutch

Specifications

| | | |
|-----------------------------------|---|-------|
| | Masonry | 16mm |
| Capacity | Wood | 76mm |
| | Steel | 13mm |
| No load speed | 0 - 500 / 0 - 2,100 (min-1) | |
| No load impact rate | 0 - 31,500 (min-1) | |
| Max. torque | Hard | 136Nm |
| | Soft | 62Nm |
| Weight | 2.5kg (with BSL36A18 battery) | |
| Length | 204mm | |
| Battery type (sold separately) | Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries | |
| Standard accessories | Side handle, driver bit and steel belt hook. Batteries and charger available separately | |

WH18DSDL(H4Z) 18V Impact Driver

Available Naked Only



- Power and save mode speed selection
- Aluminium cover for high rigidity
- Externally accessible brushes

Specifications

| | | |
|---------------|--|----------|
| | Bolt | M6 - M14 |
| Capacity | High tension bolt | M6 - M12 |
| | Screw | M4 - M10 |
| Max. torque | 176Nm | |
| No load speed | 0 - 2,000 / 2,600 (min ⁻¹) | |
| Impact rate | 0 - 2,400 / 3,200 (min ⁻¹) | |
| Drive | 6.35mm hex drive | |
| Weight | 1kg (without battery) | |



| | |
|--------------------------------|--|
| Length | 162mm |
| Battery type (sold separately) | Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries |
| Standard accessories | Driver bit and steel belt hook. |

WH18DBSL(H4Z) 18V Brushless Impact Driver

Available Naked Only



- High speed performance
- Variable speed trigger switch
- Forward/reverse changeover lever with brake

Specifications

| | | |
|---------------|------------------------------|--------|
| | Small screw | 4-8mm |
| Capacity | Standard bolt | M5-M16 |
| | High strength bolt | M5-M12 |
| Tip condition | 6.35mm bit holder | |
| No load speed | 0-3,100 (min ⁻¹) | |
| Impact rate | 0-3,400 (min ⁻¹) | |

**NEW**

| | |
|--------------------------------|--|
| Max. tightening torque | 172Nm |
| Dimensions (L x H) | 128 x 222 mm |
| Weight | 1.3kg (without battery) |
| Battery type (sold separately) | Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries |

WH18DBDL2(H4Z) 18V Brushless Impact Driver

Available Naked Only



- IP56 dust and water resistant
- Triple hammer anvil reduces vibration and "cam-out"
- 4 step tightening mode selector
- Exceptional ergonomics with well balanced weight distribution

**Specifications**

| | | |
|--------------------------------|--|--------------------------------|
| | Bolt | M5 - M18 |
| Capacity | High tension bolt | M5 - M14 |
| | Screw | M4 - M10 |
| Max. torque | 210Nm | |
| | Soft mode | 0 - 900 (min ⁻¹) |
| | Normal mode | 0 - 2,900 (min ⁻¹) |
| | Power mode | 0 - 2,900 (min ⁻¹) |
| | S mode (Self drilling) | 0 - 2,900 (min ⁻¹) |
| | Soft mode | 0 - 1,900 (min ⁻¹) |
| | Normal mode | 0 - 4,000 (min ⁻¹) |
| | Power mode | 0 - 4,000 (min ⁻¹) |
| | S mode(Self drilling) | 0 - 2,100 (min ⁻¹) |
| Weight | 1kg (without battery) | |
| Length | 127mm | |
| Battery type (sold separately) | Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries | |
| Standard accessories | Driver bit and steel belt hook. | |

DN18DSL(H4Z) 18V 10mm Angle Drill

Available Naked Only



4966376308460

- All metal gear case for extra strength
- Variable speed large paddle switch with brake
- Narrow head height for greater access
- 22 stage adjustable clutch



Specifications

| | | |
|---------------|--------------------------------|------|
| Capacity | Wood | 28mm |
| | Mild steel | 10mm |
| No load speed | 0 - 1,800 (min ⁻¹) | |
| Chuck type | 10mm keyless | |
| Head height | 88mm | |
| Weight | 1kg (without battery) | |

| | |
|--------------------------------|--|
| Length | 314mm |
| Battery type (sold separately) | Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries |
| Standard accessories | Side handle and steel belt hook |

DB3DL2(HLZ) 3.6V 6.35mm Hex Drive Pencil Driver Drill

Available as Kit Only



4966376306145

- 2 position operation (straight and angled)
- Manual tightening mechanism
- 2 speed gearbox with all metal gears
- Ultra bright white LED

Specifications

| | | |
|----------------------|--|-------|
| Max. torque | 5Nm | |
| No load speed | 200 / 600 (min ⁻¹) | |
| Drive | 6.35mm hex drive | |
| Weight | 0.45kg (with EBM315 battery) | |
| Length | Straight | 268mm |
| | Angled | 210mm |
| Battery type | EBM315 3.6V 1.5Ah li-ion cassette battery | |
| Standard accessories | 2 x EBM315 batteries, charger, driver bit and carry case | |



It's faster
and easier
with HiKOKI

DH18DPB(H4Z) 18V Brushless SDS Plus Rotary Hammer

Available Naked Only



- 2-speed mode (Low/Normal)
- Soft start speed control
- Auto-stop mode
- Durable structure to stand any conditions
- LED light

**Specifications**

| | | |
|------------------------|----------|--------------------------------|
| Capacity | Concrete | 18mm |
| | Steel | 13mm |
| | Wood | 18mm |
| No-load rotation speed | Normal | 0 - 1,080 (min ⁻¹) |
| | Low | 0 - 800 (min ⁻¹) |
| Full-load impact rate | Normal | 0 - 5,500 (min ⁻¹) |
| | Low | 0 - 4,100 (min ⁻¹) |

| | |
|--------------------------------|--|
| Impact energy | 1.3J |
| Core bit | 35mm |
| LED light | White |
| Dimension (L x h x W) | 302 x 349 x 94mm |
| Weight | 1.4kg (without battery) |
| Standard accessories | Depth gauge and side handle |
| Battery type (sold separately) | Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries |

DH18DPC(H4Z) 18V Brushless 3 Mode SDS Plus Rotary Hammer

Available Naked Only



- Efficient motor for faster drilling speed
- Reactive Force Control (RFC)
- Auto-stop function for stable drilling
- Soft start control for easier target drilling position

**NEW****Specifications**

| | | |
|-----------------------|-------------------------------|------|
| Capacity | Concrete | 26mm |
| | Steel | 13mm |
| | Wood | 27mm |
| No-load speed | 0 - 950(min ⁻¹) | |
| Full-load impact rate | 1 - 4,300(min ⁻¹) | |

| | |
|--------------------------------|--|
| Impact Energy | 2.6j |
| Dimensions (L x H x W) | 368 x 276 x 83mm |
| Weight | 2.8kg (without battery) |
| Standard Accessories | Depth gauge and side handle |
| Battery type (sold separately) | Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries |

DH18DPA(H2Z) 18V Brushless SDS Plus Rotary Hammer

Available Naked Only



- Shock-absorption to reduce vibration
- 2-speed mode (Low/Normal)
- Soft start speed control
- Auto-stop mode
- Durable structure to stand any conditions

**Specifications**

| | | |
|------------------------|--------------------|------------------------------|
| Bit shank | SDS Plus type only | |
| Capacity | Concrete | 18mm |
| | Steel | 13mm |
| | Wood | 18mm |
| No-load rotation speed | Normal | 0-1,080 (min ⁻¹) |
| | Low | 0-800 (min ⁻¹) |
| Impact energy | 1.3J | |

| | | |
|--------------------------------|--|------------------------------|
| Full-load impact rate | Normal | 0-5,500 (min ⁻¹) |
| | Low | 0-4,100 (min ⁻¹) |
| Weight | 1.8kg (without battery) | |
| Dimension (L x H x W) | 271 x 81 x 211mm | |
| Standard Accessories | Depth gauge and side handle | |
| Battery type (sold separately) | Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries | |

Faster and Easier.

HiKOKI high performance power tools are designed to make your job easier and get it done faster so you can spend less time working and more time living.



DH18DBL(H4Z) 18V Brushless SDS Plus Rotary Hammer

Available Naked Only



4966376306480

- 2.6 joules high impact energy
- 3 mode: rotation + hammering, hammer only and rotation only
- Neutral lever allows for multiple chisel positions

Specifications

| | | |
|-----------------------------------|--|------|
| | Masonry | 26mm |
| Capacity | Wood | 27mm |
| | Steel | 13mm |
| No load speed | 0 - 1,050 (min ⁻¹) | |
| Impact rate | 0 - 3,950 (min ⁻¹) | |
| Impact energy | 2.6J | |
| Chuck type | SDS Plus | |
| Weight | 3kg (without battery) | |
| Length | 351mm | |
| Battery type (sold separately) | Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries | |
| Standard accessories | Side handle and depth gauge | |



402933 Dust Extractor

Sold separately

WR18DSDL(H4Z) 18V 12.7mm Impact Wrench

Available Naked Only



- Power and save mode speed selection
- Aluminium cover for high rigidity
- Externally accessible brushes



Specifications

| | | |
|------------------------|--|-----------|
| Capacity | Bolt | M10 - M18 |
| | High tension bolt | M8 - M14 |
| Max. tightening torque | 271Nm | |
| Square drive | 12.7mm (½") | |
| No load speed | 0 - 2,000 / 2,600 (min ⁻¹) | |
| Impact rate | 0 - 2,400 / 3,200 (min ⁻¹) | |
| Weight | 1kg | |

| | |
|-----------------------------------|--|
| Length | 173mm |
| Battery type (sold separately) | Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries |
| Standard accessories | Steel belt hook. Socket not included |

WR18DBDL2(HRZ)
18V Brushless 12.7mm Impact Wrench

Available Kit and Naked



- IP56 dust and water resistant
- 4 step tightening mode selector
- Smooth socket changes with friction ring anvil
- Exceptional ergonomics with well balanced weight distribution



Specifications

| | | |
|------------------------|---|--------------------------------|
| Capacity | Bolt | M10 - M20 |
| | High tension bolt | M10 - M16 |
| Max. tightening torque | 305Nm | |
| Square Drive | 12.7mm (½") | |
| | High mode | 0 - 2,700 (min ⁻¹) |
| | Medium mode | 0 - 2,000 (min ⁻¹) |
| | Low mode | 0 - 1,000 (min ⁻¹) |
| No load speed | Single mode | 0 - 2,700 (min ⁻¹) |
| | | |
| Full load impact rate | 0 - 3,600 (min ⁻¹) | |
| Weight | 1.8kg (with BSL36A18 battery) | |
| Length | 145mm | |
| Battery type | BSL36A18 : Li-ion MultiVolt (Battery A) | |
| Standard accessories | 2 x BSL36A18 MultiVolt batteries, UC18YSL3 rapid charger, belt hook and stackable case. Socket not included | |



Naked: WR18DBDL2(H4Z)



Faster and Easier.

HiKOKI high performance power tools are designed to make your job easier and get it done faster so you can spend less time working and more time living.



WF18DSL(H4Z) 18V Automatic Screw Driver

Available Naked Only



4966376319787

- Quick adjustment button allows fast adjustment to suit screw length
- Silent clutch for low noise and shock free clutching
- Belt guide on slider case for accurate feeding

Specifications

| | | |
|-----------------------------------|--|-----|
| Capacity | Small screw | 4mm |
| Screw length | 25 - 41mm | |
| No load speed | 4,200 (min ⁻¹) | |
| Drive | 6.35mm hex drive | |
| Weight | 1.4kg (without battery) | |
| Length | 399mm | |
| Battery type (sold separately) | Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries | |
| Standard accessories | 3 x No.2 phillips driver bits, 3 x surface protectors and steel belt hook. | |

NT1850DBSL(H4Z) 18V Brushless 50mm C1 Brad Nailer

Available Naked Only



- Lower running cost than gas nailers
- Unique air drive system
- Drive up to 2,800 nails per charge
- Reload window is incorporated within the magazine

| Specifications | | |
|--------------------------------|--|-------|
| Driving system | Unique Air Drive | |
| Nail length | 16 - 50mm | |
| Driving speed | 3 nails/sec (intermittent) | |
| Loading capacity | 100 nails | |
| Firing mode | Full sequential / Contact (selectable) | |
| Fastening series | 18 gauge C1 series Brad nails | |
| Weight | 2.9kg (without battery) | |
| Dimensions | Length | 310mm |
| | Height | 323mm |
| | Width | 104mm |
| Battery type (sold separately) | Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries | |
| Standard accessories | Hook, nose cap, safety glasses and stackable case | |



NT1865DBAL(HRZ) 18V Brushless 65mm DA Finish Nailer

Available Kit and Naked



- Lower running cost than gas nailers
- Unique air drive system
- Drive up to 2,250 nails per charge
- Dry fire lockout

| Specifications | | |
|----------------------|---|-------|
| Driving system | Unique Air Drive | |
| Nail length | 32 - 65mm | |
| Driving speed | 3 nails/sec (intermittent) | |
| Loading capacity | 100 nails | |
| Firing mode | Full sequential / Contact (selectable) | |
| Fastening Series | 15 gauge DA series finish nails | |
| Weight | 3.8kg (with BSL36A18 battery) | |
| Dimensions | Length | 310mm |
| | Height | 344mm |
| | Width | 104mm |
| Battery type | BSL36A18 : Li-ion MultiVolt (Battery A) | |
| Standard accessories | 2 x BSL36A18 MultiVolt batteries, UC18YSL3 rapid charger, hook, nose cap, safety glasses and stackable case | |



Naked: NT1865DBAL(H4Z)



NT1850DA(H4Z) 18V Brushless 50mm Brad Nailer

Available Naked Only



- Reduced running costs
- Unique air drive system
- Drive up to 2,600 nails per charge
- Re-load window is incorporated within the magazine

Specifications

| | |
|-----------------------|-------------------------------|
| Nail length | 16-50mm |
| Driving speed | 2.5 nails/sec |
| Loading capacity | 100 nails |
| Firing mode | Full sequential/contact |
| Fastening series | 18 Gauge C1 Series Brad nails |
| Dimension (L x H x W) | 267 x 286 x 92mm |
| Weight | 2.4kg |



NT1865DA(HRZ) 18V Brushless DA Series 65mm Finish Nailer

Available Kit and Naked

NEW



- Reduced running costs
- Unique air drive system
- Drive up to 2,600 nails per charge
- Exceptional power and performance

Specifications

| | |
|-----------------------|---|
| Nail length | 32-65mm |
| Driving speed | 3 nails/sec (intermittent) |
| Loading capacity | 100 nails |
| Firing mode | Full sequential/contact |
| Fastening series | 16 Gauge DA Series Finish nails |
| Dimension (L x H x W) | 310 x 323 x 104mm |
| Weight | 3.7kg |
| Standard accessories | 2 x BSL36A18 MultiVolt batteries, UC18YSL3 rapid charger, hook, nose cap, safety glasses and stackable case |



Naked: NT1865DA(H4Z)



NT1865DBSL(HRZ) 18V Brushless 65mm C Finish Nailer

Available Kit and Naked



9323624029044

- Lower running cost than gas nailers
- Unique air drive system
- Drive up to 2,650 nails per charge
- Dry fire lockout

Specifications

| | | |
|----------------------|---|-------|
| Driving system | Unique Air Drive | |
| Nail length | 25 - 65mm | |
| Driving speed | 3 nails/sec (intermittent) | |
| Loading capacity | 100 nails | |
| Firing mode | Full sequential / Contact (selectable) | |
| Fastening series | 16 gauge C series finish nails | |
| Weight | 3.6kg (with BSL36A18 battery) | |
| Dimensions | Length | 310mm |
| | Height | 323mm |
| | Width | 104mm |
| Battery type | BSL36A18 : Li-ion MultiVolt (Battery A) | |
| Standard accessories | 2 x BSL36A18 MultiVolt batteries, UC18YSL3 rapid charger, hook, nose cap, safety glasses and stackable case | |



Naked: NT1865DBSL(H4Z)



4966376316250

NR1890DBCL(HRZ) 18V Brushless 90mm 34° (Strip) Framing Nailer

Available Kit and Naked



9323624029051

- Lower running cost than gas nailers
- Unique air drive system
- Dual function trigger for sequential and contact mode with operation control panel
- Dry fire lockout

Specifications

| | | |
|----------------------|---|-------|
| Driving system | Unique Air Drive | |
| Nail length | 50 - 90mm | |
| Driving speed | 3 nails/sec (intermittent) | |
| Loading capacity | 47 nails | |
| Firing mode | Full sequential / Contact (selectable) | |
| Fastening Series | Clipped head strip nails | |
| Weight | 4.8kg (with BSL36A18 battery) | |
| Dimensions | Length | 309mm |
| | Height | 342mm |
| | Width | 127mm |
| Battery type | BSL36A18 : Li-ion MultiVolt (Battery A) | |
| Standard accessories | 2 x BSL36A18 MultiVolt batteries, UC18YSL3 rapid charger, hook, 2 x hex wrenches, safety glasses and stackable case | |



Naked: NR1890DBCL(H4Z)



4966376315963

18VFRAMERCOMBO1(HRZ) 2 Piece 18V Brushless Combination Pack



9323624028535

- NR1890DBCL Brushless 90mm Framing Nailer
- NT1865DBAL Brushless 65mm DA Finish Nailer
- 2 x BSL36A18 MultiVolt Battery (A)
- UC18YSL3 Rapid Charger
- 2 x Stackable Carry Cases



18VFRAMERCOMBO2(HRZ) 2 Piece 18V Brushless Combination Pack



9323624028542

- NR1890DBCL Brushless 90mm Framing Nailer
- NT1865DBSL Brushless 65mm C Finish Nailer
- 2 x BSL36A18 MultiVolt Battery (A)
- UC18YSL3 Rapid Charger
- 2 x Stackable Carry Cases



18VFRAMERCOMBO4(HRZ) 2 Piece 18V Brushless Combination Pack

NEW



9323624000159

- NR1890DBCL Brushless 90mm Framing Nailer
- NT1865DA Brushless DA Series 65mm Finish Nailer
- 2 x BSL36A18 MultiVolt Battery (A)
- UC18YSL3 Rapid Charger
- 2 X Stackable Carry Cases



G18DSL2(H5Z) 18V 125mm Angle Grinder with slide switch

Available Naked Only



4966376337972

- Restart protection to minimise accidents
- Motor overload protection
- Slimline soft-grip handle

Specifications

| | |
|--|----------------------------|
| Wheel diameter | 125mm |
| No load speed | 9,000 (min ⁻¹) |
| Grip perimeter | 182mm |
| Switch Type | Slide Switch |
| Dimensions (L x H x Gear Cover Height) | 306 x 118 x 71mm |
| Weight | 1.1kg (without battery) |



| | |
|--------------------------------|--|
| Battery type (sold separately) | Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries |
| Standard accessories | Resinoid wheel, side handle, wrench and wheel guard |

G18DBL(H5Z) 18V Brushless 125mm Angle Grinder with Slide Switch

Available Naked Only



4966376314201

- Auto Mode function
- Soft start, kickback reduction, restart protection
- Compact grip circumference

Specifications

| | |
|----------------|--|
| Wheel diameter | 125mm |
| Switch type | Slide |
| No load speed | Auto mode 5,500 (min ⁻¹) |
| | Standard mode 9,000 (min ⁻¹) |
| Spindle thread | M14 x 2 |
| Weight | 1.7kg (without battery) |



| | | |
|--------------------------------|--|-------|
| Dimensions | Length | 326mm |
| | Height | 138mm |
| | Grip circumference | 152mm |
| Battery type (sold separately) | Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries | |
| Standard accessories | Side handle, grinding disc and wrench | |

G18DBBAL(H5Z) 18V Brushless 125mm Angle Grinder with Paddle Switch

Available Naked Only



4966376314003

- Auto Mode function
- Fast brake system stops the disc within 2 seconds
- Soft start, kickback reduction, restart protection
- Compact grip circumference

Specifications

| | |
|----------------|--|
| Wheel diameter | 125mm |
| Switch type | Paddle |
| No load speed | Auto mode 5,500 (min ⁻¹) |
| | Standard mode 9,000 (min ⁻¹) |
| Spindle thread | M14 x 2 |
| Weight | 2kg (without battery) |



| | | |
|--------------------------------|--|-------|
| Dimensions | Length | 326mm |
| | Height | 138mm |
| | Grip circumference | 152mm |
| Battery type (sold separately) | Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries | |
| Standard accessories | Side handle, grinding disc and wrench | |

GP18DA(H4Z) 18V Brushless die grinder with slide switch

Available Naked Only

NEW



4966376337330

- Powerful Brushless Motor
- High grinding performance
- Kickback and overload protection



Specifications

| | | |
|-----------------------|-------------------------|--------------------------------------|
| No load speed | Transmission mode | 7,000 to 29,000 (min ⁻¹) |
| | Auto mode | 15000 (min ⁻¹) |
| Collet chuck capacity | 6mm | |
| Max. wheel diameter | 50mm | |
| Switch | Side slide switch | |
| Weight | 1.5kg (without battery) | |

| | |
|--------------------------------|--|
| Dimensions (L x W x H) | 388 x 86 x 115mm |
| Battery type (sold separately) | Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries |
| Standard accessories | Collet chuck, 17mm and 12mm wrench |

GP18DB(H4Z) 18V Brushless die grinder with paddle switch

Available Naked Only

NEW



4966376337392

- Powerful Brushless Motor
- High grinding performance
- Kickback and overload protection



Specifications

| | | |
|-----------------------|-------------------------|--------------------------------------|
| No load speed | Transmission mode | 7,000 to 29,000 (min ⁻¹) |
| | Auto mode | 15000 (min ⁻¹) |
| Collet chuck capacity | 6mm | |
| Max. wheel diameter | 50mm | |
| Switch | Paddle switch | |
| Weight | 1.5kg (without battery) | |

| | |
|--------------------------------|--|
| Dimensions (L x W x H) | 388 x 86 x 115mm |
| Battery type (sold separately) | Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries |
| Standard accessories | Collet chuck, 17mm and 12mm wrench |

C18DBL(H4Z) 18V 125mm Brushless Circular Saw

Available Naked Only



4966376301782

- Electric brake
- Rotation speed change over function: Power mode / Silent mode
- Centre balance technology offers superior manoeuvrability
- Compact and lightweight



Specifications

| | | |
|----------------|-------------------------|----------------------------|
| Capacity | Max. of depth cut: 90° | 47mm |
| | Max. of depth cut: 45° | 30mm |
| No load speed | Power mode | 5,000 (min ⁻¹) |
| | Silent mode | 3,000 (min ⁻¹) |
| Blade diameter | 125mm | |
| Angle cutting | 0° - 45° | |
| Weight | 1.8kg (without battery) | |

| | | |
|--------------------------------|--|-------|
| Dimensions | Length | 280mm |
| | Width | 168mm |
| | Height | 237mm |
| Battery type (sold separately) | Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries | |
| Standard accessories | Blade and wrench | |

C18DSL(H4Z) 18V 165mm Circular Saw

Available Naked Only



- Electric brake
- Magnesium saw cover for high rigidity
- Safety switch lever and light switch are integrated
- 90° fine adjustment screw
- Ergonomic soft grip handle

Specifications

| | | |
|----------------|----------------------------|------|
| Capacity | Max. of depth cut: 90° | 57mm |
| | Max. of depth cut: 45° | 40mm |
| No load speed | 3,400 (min ⁻¹) | |
| Blade diameter | 165mm | |
| Angle cutting | 0° - 45° | |



| | |
|--------------------------------|--|
| Weight | 2.5kg (without battery) |
| Length | 365mm |
| Battery type (sold separately) | Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries |
| Standard accessories | Blade, wrench and parallel guide |

C1806DA(H4Z) 18V 165MM Circular Saw

Available Naked Only

- Exceptionally smooth cut
- Safety brake
- Visible bevel and depth adjustment
- Compact & well balanced design

Specifications

| | | |
|--------------------|----------------------------|--|
| Bevel Capacity | 0 to 45° | |
| No load speed | 3,800 (min ⁻¹) | |
| Cutting depth | 90° - 57mm | |
| | 45° - 38mm | |
| Cutting Speed | 140% | |
| Max. Thrust Force* | 65% | |

*When thrust force 30N when cutting SPF2"x4", Cross cut



| | |
|--------------------------------|--|
| Weight | 3.6kg (TBC) |
| Dimensions (L x W x H) | 291 x 212 x 267 mm |
| Battery type (sold separately) | Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries |

C18DBAL(H4Z) 18V 165mm Brushless Circular Saw

Available Naked Only



- Electric brake
- Rotation speed change over function: Power mode / Silent mode
- Centre balance technology offers superior manoeuvrability
- Compact and lightweight

Specifications

| | | |
|----------------|-------------------------|----------------------------|
| Capacity | Max. of depth cut: 90° | 66mm |
| | Max. of depth cut: 45° | 45mm |
| No load speed | Power mode | 4,100 (min ⁻¹) |
| | Silent mode | 2,500 (min ⁻¹) |
| Blade diameter | 165mm | |
| Angle cutting | -5° - 45° | |
| Weight | 2.5kg (without battery) | |



| | | |
|--------------------------------|--|-------|
| Dimensions | Length | 294mm |
| | Width | 188mm |
| | Height | 255mm |
| Battery type (sold separately) | Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries | |
| Standard accessories | Blade and wrench | |

CJ18DA(H4Z) 18V 135mm Jig Saw With Top Handle

Available Naked Only



- 4-mode orbital action to suit multiple cutting applications
- Dust blower provides a clear view of the cutting line
- Trigger switch with OFF lock feature
- LED light

Specifications

| | | |
|---------------------|------------------------------|-------|
| | Wood | 135mm |
| Capacity | Mild steel | 10mm |
| | Stainless steel | 2.5mm |
| Min. cutting radius | 25mm | |
| Max. cutting angle | 45° (right and left) | |
| No load speed | 0-2,500 (min ⁻¹) | |
| Length of stroke | 26mm | |



| | |
|--------------------------------|--|
| Dimension (L x H) | 276 x 202 mm |
| Weight | 1.9kg (without battery) |
| Battery type (sold separately) | Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries |
| Standard Accessories | Cutting blades and splinter guard |

CR18DA(H4Z) 18V Reciprocating Saw

Available Naked Only



- Compact design
- Lightweight and easy to use
- Well balanced for less user fatigue

Specifications

| | | |
|----------------|--------------------------------------|------|
| Capacity | Mild steel pipe (outer diameter) | 50mm |
| | Vinyl chloride pipe (outer diameter) | 50mm |
| | Wood (thickness) | 50mm |
| | Mild steel plate (thickness) | 12mm |
| No load speed | 0-3,200 min ⁻¹ | |
| Stroke | 13mm | |
| Type of Switch | Variable trigger | |



| | |
|--------------------------------|--|
| LED Light | White LED |
| Dimension (L x W x H) | 350 x 84 x 172mm |
| Weight | 1kg (without battery) |
| Battery type (sold separately) | Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries |
| Standard Accessories | Cutting blade |

CR18DBL(H4Z) 18V Brushless Reciprocating Saw

Available Naked Only



- Auto Mode function
- Electronic control panel to select between low, medium, high and auto modes
- Slimmer front and shock absorbing handle for user comfort
- Blade can be mounted in either upward or downward direction

Specifications

| | | |
|---------------|--|-------|
| Capacity | Steel pipe | 130mm |
| | Wood | 120mm |
| | Steel plate | 19mm |
| No load speed | 0 - 1,600 / 2,300 / 2,500 (min ⁻¹) | |



| | |
|--------------------------------|--|
| Stroke length | 32mm |
| Weight | 2.7kg (without battery) |
| Length | 435mm |
| Battery type (sold separately) | Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries |
| Standard accessory | Cutting blade |

NEW



M1808DA(H4Z) 18V Brushless Laminate Trimmer

Available Naked Only



4966376336098

- Variable speed control
- Easy access ON/OFF switch
- Safety switch operation
- LED light

Specifications

| | |
|--------------------------------|--|
| Collet cone capacity | 6 and 8 mm |
| No load speed | 10,000-30,000 min ⁻¹ |
| Dimension (L x W x H) | 109 x 100 x 229 mm |
| Weight | 1kg (without battery) |
| Battery type (sold separately) | Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries |
| Standard accessories | 23mm wrench, straight guide, duct adaptor, template guide, M12, trimmer guide, 6mm collet cone |

CB18DBL(H4Z) 18V 83mm Brushless Band Saw

Available Naked Only



4966376302345

- Auto Mode function
- Soft start function
- High speed cutting with a cleaner finish



Specifications

| | | |
|--------------------------------|--|-------------------|
| Capacity | Round pipe (external diameter) | 83mm |
| | Square pipe (WxH) | 80 x 80mm |
| | Standard mode | 80 - 195 (m/min) |
| Cutting speed | Auto mode (without load) | 120 - 195 (m/min) |
| | | |
| Blade size | 900 x 12.5 x 0.5mm | |
| Weight | 2.9kg (without battery) | |
| Dimensions | Length | 413mm |
| | Width | 173mm |
| | Height | 266mm |
| Battery type (sold separately) | Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries | |
| Standard accessories | 1 x 18TPI bi-metal blade, side handle and wrench | |

Blade Selection Guide

| | | |
|------------|--------|--------|
| Part no | 338430 | 338431 |
| Thickness | 18TPI | 14TPI |
| Under 3mm | ✓ | X |
| 3mm to 6mm | ✓ | ✓ |
| Over 6mm | X | ✓ |

P18DSL(H4Z) 18V 82mm Planer

Available Naked Only



4966376316762

- Heavy-duty aluminium end bracket
- Rear stand for added user safety and blade protection
- Ergonomic slim grip angled handle
- Optional dust adaptor



Specifications

| | | |
|---------------------|-----------------------------|-------|
| Cutting width | 82mm | |
| Max. cutting depth | 2.0mm | |
| Max. rebating depth | 9.0mm | |
| No load speed | 16,000 (min ⁻¹) | |
| Weight | 2.6kg (without battery) | |
| Dimensions | Length | 332mm |
| | Width | 166mm |
| | Height | 160mm |

| | | |
|--------------------------------|--|--|
| Battery type (sold separately) | Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries | |
| Standard accessories | 4 x 82mm reversible TCT blades | |

CE18DSL(H4Z) 18V 1.6mm Shear

Available Naked Only



4966376302444

- Unique design allows for fast cutting and tight cutting radius
- Metal safety guard
- Safety anti-start override circuit
- Easily replaceable cutter blades with 8 cutting edges



Specifications

| | | |
|------------------------|---|-------|
| Cutting capacity | Mild steel plate (400N/mm ²) | 1.6mm |
| | Stainless steel plate (400N/mm ²) | 1.2mm |
| Minimum cutting radius | 25mm | |
| Cutting speed | 5.0 (m/min)* | |

| | |
|--------------------------------------|--|
| Number of strokes at no load | 5,300 (min ⁻¹) |
| Weight | 1.5kg (without battery) |
| Length | 295mm |
| Battery type (sold separately) | Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries |
| *When cutting 1.6mm thick mild steel | |

CN18DSL(H4Z) 18V 1.6mm Nibbler

Available Naked Only



4966376304448

- 180 degree 3 stop die holder
- Safety anti-start override circuit
- Punch and die have 300m steel service life*



Specifications

| | | |
|------------------------|---|-------|
| Cutting capacity | Mild steel plate (400N/mm ²) | 1.6mm |
| | Stainless steel plate (400N/mm ²) | 1.2mm |
| Minimum cutting radius | 40mm | |
| Cutting speed | 1.8 (m/min)* | |

| | |
|--------------------------------------|--|
| Number of strokes at no load | 2,500 (min ⁻¹) |
| Weight | 1.4kg (without battery) |
| Length | 295mm |
| Battery type (sold separately) | Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries |
| *When cutting 1.6mm thick mild steel | |

CV18DBL(H4Z) 18V Brushless Multi Tool

Available Naked Only



4966376305681

- Auto Mode function
- Oscillating Interface System (OIS)
- Constant speed control



Specifications

| | | |
|---------------------------------------|-------------------------|-------------------------------------|
| Operating speed / Vibration frequency | Standard mode | 6,000 - 20,000 (min ⁻¹) |
| | Auto mode (no load) | 6,000 - 15,000 (min ⁻¹) |
| | Auto mode (with load) | 6,000 - 20,000 (min ⁻¹) |
| Weight | 1.3kg (without battery) | |

| | |
|--------------------------------|--|
| Length | 307mm |
| Battery type (sold separately) | Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries |
| Standard accessories | 1 x Bi-metal plunge cut saw blade, 1 x Bi-metal segment saw blade, sanding plate, 9 x assorted sandpaper and accessories storage box |

AW18DBL(HRZ) 18V Brushless High Pressure Washer

Available Kit and Naked



9323624028559

- Ideal for use where mains water or electricity is not accessible
- Approx. 7 x more powerful^{*1} and uses 94% less water per minute^{*2} than a garden hose.
- Lightweight and compact

Specifications

| | | |
|-------------------------|--|-------|
| Discharge pressure | 0.5 - 2.0 (Mpa) | |
| Water discharge | 0.5 - 1.2 (L/min) | |
| Water supply method | Tank water supply / Faucet connection / Storage water supply | |
| Permissible water temp. | 40°C or less | |
| Tank capacity | 8L | |
| Weight | 4.5kg (with BSL36A18 battery) | |
| Dimensions | Length | 302mm |
| | Width | 254mm |
| | Height | 473mm |
| Battery type | BSL36A18 : Li-ion MultiVolt (Battery A) | |



Naked: AW18DBL(H4Z)



4966376301522

Standard accessories

2 x BSL36A18 MultiVolt batteries, UC18YSL3 rapid charger, trigger gun, 3m high pressure hose, variable nozzle and nozzle cleaner pin

*1: When the mains water pressure is approx. 0.3Mpa. The value may vary according to conditions.

*2: The values are for reference purposes. They may vary according to conditions.

CH18DSL(H4Z) 18V Hedge Trimmer

Available Naked Only



4966376303298

- Dual action double-sided and double-edged blades
- Large front handle with safety switch
- Long cutting blade



Specifications

| | |
|--------------------|----------------------------|
| No load speed | 1,100 (min ⁻¹) |
| Cutting bar length | 520mm |
| Cutting capacity | 15mm |
| Weight | 1.7kg (without battery) |

| | |
|--------------------------------|--|
| Length | 846mm |
| Battery type (sold separately) | Compatible with all Hitachi and HIKOKI MultiVolt and 18V slide batteries |
| Standard accessories | Cutting blade bar cover |

RB18DC(DS4Z) 18V Blower and Vacuum Pack

Available Naked Only



9323624000401

- Exceptional air volume
- Easy to operate trigger locking button
- Compatible with existing accessories
- Light weight and easy to use



NEW

Specifications

| | |
|----------------------|----------------------------|
| Air Volume | 13.5 (m ³ /min) |
| Max Air Velocity | 95 (m/s) |
| Vibration Level | 2.0 (m/s ²) |
| Sound Pressure Level | 85 (dB(A)) |
| Switch Type | Trigger Switch |
| Weight | 1.8kg |

| | |
|--------------------------------|---|
| Dimensions (L x W x H) | 505 x 155 x 220mm |
| Battery type (sold separately) | Compatible with all Hitachi and HIKOKI MultiVolt and 18V slide batteries |
| Standard accessories | Short nozzle, long nozzle, dust bag, flexible hose and adaptor, crevice nozzle and concentrator nozzle. |

R18DSL(H4Z) 18V Wet & Dry Vacuum

Available Naked Only



- High suction power in both wet and dry applications
- Large capacity dust and liquid case
- Semi-transparent dust case



Specifications

| | |
|-----------------------------------|---|
| Capacity | Dust: 670ml Liquid: 120ml |
| Run time | 50min (with BSL36A18 battery) |
| Weight | 0.8kg (without battery) |
| Length | 430mm |
| Battery type (sold separately) | Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries |
| Standard accessories | Brush, crevice and squeegee nozzle |

R18DTB(H4Z) 18V Vacuum Cleaner

Available Naked Only



- High-performance suction power
- Low noise operation
- Built-in LED light
- Easy and quick dust disposal
- Light and compact

Specifications

| | |
|--------------------------------|---|
| Dust collection capacity | 560ml |
| Suction work rate | 40W |
| Run time | 40 minutes |
| Maximum airflow rate | 1.25 m ³ /min |
| Maximum degree of vacuum | 4.5 kPa |
| Dimensions (LxH) | 476 x 170mm |
| Weight | 1kg (without battery) |
| Battery type (sold separately) | Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries |
| Standard Accessories | Flooring nozzle, Extension pipe (with nozzle holder) and Crevice nozzle |



UB18DJL(L0Z) 18V Worklight & Torch

Available Naked Only



4966376317745

- Torchlight and worklight functions
- 12 ultra bright white LEDs
- Adjustable head which pivots left-right 270 degrees in seven steps and up-down 180 degrees in five steps

Specifications

| | | |
|--------------|--|--------------------------------|
| Light source | 12 x 0.5W, 1x 3W ultra bright white LEDs | |
| Illumination | Torch light | 6,000 lx |
| | High (12 LED) | 110 lx |
| | Mid (6 LED) | 55 lx |
| Run time | Low (3 LED) | 27 lx |
| | Torch light | 43 hrs (with BSL36A18 battery) |
| | High (12 LED) | 16 hrs (with BSL36A18 battery) |
| | Mid (6 LED) | 30 hrs (with BSL36A18 battery) |
| | Low (3 LED) | 51 hrs (with BSL36A18 battery) |



| | | |
|--------------------------------|--|-------|
| Weight | 0.3kg (without battery) | |
| Dimensions | Length | 205mm |
| | Width | 78mm |
| | Height | 108mm |
| Battery type (sold separately) | Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries | |
| Standard accessories | Shoulder strap and hook | |

UB18DGL(L0Z) 18V Worklight

Available Naked Only



4966376317707

- Massive illumination with 36 bright white LEDs
- 240° adjustable head which pivots in 16 steps
- Multiple mounting capabilities

Specifications

| | | |
|--------------|----------------------------|---------------------------------|
| Light source | 36 ultra bright white LEDs | |
| Illumination | Power mode | 250 lx |
| | Save mode | 140 lx |
| Run time | Power mode | 6.5 hrs (with BSL36A18 battery) |
| | Save mode | 15 hrs (with BSL36A18 battery) |
| Weight | 0.74kg (without battery) | |



| | | |
|--------------------------------|--|-------|
| Dimensions | Length | 198mm |
| | Width | 256mm |
| | Height | 252mm |
| Battery type (sold separately) | Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries | |

UB18DA(W4Z) 18V Search Light

Available Naked Only



4966376328734

- High brightness (light flux 2,500lm)
- 4 lighting modes (Spot+Wide, Spot, Wide, Wide ECO)
- IP54 dust and water resistance

Specifications

| | | |
|---|--------------------------|------------------|
| Light Flux (continuous lighting time when using an 18V battery) | Spot +Wide | 2,500lm (3hrs) |
| | Spot | 1,100lm (6hrs) |
| | Wide | 1,300lm (5.8hrs) |
| | Wide (ECO) | 400lm (22hrs) |
| Weight | 1.85kg (without battery) | |



| | | |
|--------------------------------|--|-------|
| Dimensions | Length | 280mm |
| | Width | 203mm |
| | Height | 204mm |
| Battery type (sold separately) | Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries | |

UR18DSDL(H4Z) 18V Digital Radio With Bluetooth

Available Naked Only



- Digital signal (DAB & DAB+) receiving system
- IPX4 water protection grade
- USB terminal allows charging of smart phones and music players
- Bluetooth connection capability
- High frequency amplifier for reduced static

Specifications

| | |
|--------------|-------------------------|
| AM frequency | 522 - 1629 (KHz) |
| FM frequency | 87.5 - 108 (MHz) |
| Speaker | 90mm (8Ω) 7W x 2 |
| Weight | 4.0kg (without battery) |



| | | |
|-------------------------------------|--|-------|
| Dimensions (without accessories) | Length | 405mm |
| | Width | 312mm |
| | Height | 265mm |
| Battery type (sold separately) | Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries | |
| Standard accessories | AC adaptor, 2 x AA batteries and cable holder | |

US18DA(H4Z) 18V Bluetooth Speaker

Available Naked Only



- Equipped with 3-way speakers
- Adjustable bass & treble equaliser
- USB charging output port

Specifications

| | | |
|-----------------------------|-------------------|---------------------|
| Speaker | Passive radiator | 93mm x 1 |
| | Mid-range | 78mm x 2 |
| | Tweeter | 31mm x 2 |
| Connection terminal | USB charging port | DC 5 V (2.1 A max.) |
| | AUX input port | 3.5 mm dia. (audio) |
| Volume control | 30 levels | |
| Equaliser | Bass | 6 levels |
| | Treble | 6 levels |
| Bluetooth – Radio frequency | 2.4 GHz | |



| | |
|--------------------------------|--|
| Resistance to dust and water | IP54 |
| Continuous run time | Up to 40hr |
| Dimensions (L x W x H) | 234 x 255 x 222 mm |
| Weight | 2.8kg (without battery) |
| Battery type (sold separately) | Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries |

UF18DSAL(H0Z) 18V Cordless Fan

Available Naked Only



- 3-stage operating switch-off timer- 1hr, 2hrs or 4hrs selection
- Up to 7 hours of continuous run time on low mode setting
- Two wind speed feature (High and Low mode)
- Durable design to withstand tough conditions

Specifications

| | | |
|------------------|------------------------------|------------|
| Wind speed | High mode | 190 m/min. |
| | Low mode | 160 m/min. |
| Air volume | High mode | 18 m³/min. |
| | Low mode | 14 m³/min. |
| Operating time | Up to 4.5 hour in high speed | |
| Switch-off timer | 1, 2 and 4hrs | |



| | |
|--------------------------------|--|
| Fan diameter | 255 mm |
| Dimensions (L x H) | 277 x 206mm |
| Weight | 3kg (without battery) |
| Battery type (sold separately) | Compatible with all Hitachi and HiKOKI MultiVolt and 18V slide batteries |
| Standard accessories | AC adapter |

KC18DBSL(HAZ) 2 Piece 18V Brushless Combination Pack



4966376336562

- DV18DBSL Brushless Impact (Hammer) Driver Drill
- WH18DBSL Brushless Impact Driver
- 2 x BSL36A18 MultiVolt Battery (A)
- UC18YSL3 Rapid Charger
- Carry Case



KC18DPL(HRZ) 2 Piece 18V Brushless Combination Pack



9323624029303

- DV18DBL2 Brushless Impact (Hammer) Driver Drill
- WR18DBDL2 Brushless 12.7mm Impact Wrench
- 2 x BSL36A18 MultiVolt Battery (A)
- UC18YSL3 Rapid Charger
- Stackable Case



KC18DDBL(HCZ) 3 Piece 18V Brushless Combination Pack



4966376336975

- DV18DBSL Brushless Impact (Hammer) Driver Drill
- WH18DBSL Brushless Impact Driver
- G18DBL Brushless 125mm Angle Grinder with Slide Switch
- 2 x BSL36A18 MultiVolt Battery (A)
- UC18YSL3 Rapid Charger
- 2 x Stackable Carry Cases



KC18D5P(HRZ) 5 Piece 18V Brushless Combination Pack



9323624000050

- DV18DBSL Brushless Impact (Hammer) Driver Drill
- WH18DBSL Brushless Impact Driver
- G18DBL Brushless Angle Grinder
- DH18DBL Brushless Rotary Hammer
- C18DBAL Brushless Circular Saw
- 2 x BSL36A18 MultiVolt Battery (A)
- UC18YSL3 Rapid Charger
- 1 X Large Site Bag



KC18D8P(HRZ) 8 Piece 18V Brushless Combination Pack



9377778047799

- DV18DBL2 Brushless Impact (Hammer) Driver Drill
- WH18DBDL2 Brushless Impact Driver
- G18DBL Brushless Angle Grinder
- DH18DBL Brushless SDS Plus Rotary Hammer
- CR18DBL Brushless Reciprocating Saw
- C18DBAL Brushless Circular Saw
- UB18DJL Worklight & Torch
- RB18DSL Blower & Vacuum Pack
- 3 x BSL36A18 MultiVolt Battery (A)
- UC18YSL3 Rapid Charger
- Large Site Bag



KC18D12P(HRZ) 12 Piece 18V Brushless Combination Pack



9323624000128

- DV18DBL2 Brushless Impact (Hammer) Driver Drill
- WH18DBDL2 Brushless Impact Driver
- WR18DBDL2 Brushless Impact Wrench
- G18DBL Brushless Angle Grinder
- DH18DBL Brushless Rotary Hammer
- CR18DBL Brushless Reciprocating Saw
- C18DBAL Brushless Circular Saw
- CV18DBL Brushless Multi-Tool
- RB18DSL Blower & Vacuum (Accessories not included)
- R18DSL Wet & Dry Vacuum
- UR18DSDL Digital Radio With Bluetooth
- UB18DA 18V Search Light
- 4 x BSL36A18 MultiVolt Battery (A)
- UC18YSL3 Rapid Charger
- 1 x Premium Site Bag



Lithium Ion Batteries

EBM315 3.6V 1.5Ah



4966375647355



BSL1830C 18V 3.0Ah Compact



4549115116306



BSL36B18 18V 8.0Ah / 36V 4.0Ah MultiVolt



4549115160651



BSL36A18 18V 5.0Ah / 36V 2.5Ah MultiVolt



4549115156203



36VSTARTERPACK1Z



9323624028757



36VSTARTERPACK2Z



9323624028764



Lithium Ion Battery Chargers

UC3SFL(H0Z) 3.6V Charger



4966376319053



UC18YML2(H0Z) 14.4 - 18V Two Way (AC/DC) Charger with Cooling System



4966376318568



UC18YSL3(H0Z) 14.4 - 18V Rapid Charger

with Cooling System & USB Port



4966376318698



UC18YTSL(H0Z) 4 Port Multi Charger



4966376329311



ET36A(H0Z) 36V Battery Adaptor



4966376324514



02

Pneumatic



N3804AB3(H2Z) 38mm Narrow Crown Stapler



4966376296965

- Both single & bump fire
- Tool-less depth dial
- Tool-less release for clearing jammed staples
- 360° adjustable exhaust directs air away from user

Specifications

| | |
|----------------------|---|
| Fastener series | 18 gauge 6000 series staples |
| Pressure range | 70 – 120 psi |
| Max. capacity | 125 staples |
| Dimensions | 263 x 235mm |
| Weight | 1.0kg |
| Standard accessories | Nose protector, safety glasses and carry case |



NT50AE2(H2Z) 50mm C1 Series Brad Nailer



4966376297153

- Both single & bump fire
- Tool-less depth dial
- Tool-less release for clearing jammed nails
- 360° adjustable exhaust directs air away from user
- Replacement O-Ring kit (886375)

Specifications

| | |
|----------------------|---|
| Fastener series | 18 gauge C1 series brad nails |
| Pressure range | 70 – 120 psi |
| Max. capacity | 100 nails |
| Dimensions | 254 x 233mm |
| Weight | 1.0kg |
| Standard accessories | Nose protector, safety glasses and carry case |



NT65M2(H2Z) 65mm C Series Finish Nailer



4966376297252

- Both single & bump fire
- Tool-less depth dial
- Replacement O-Ring kit (885914)
- Tool-less release for clearing jammed nails
- 360° adjustable exhaust directs air away from user
- Unique integrated air duster acts as a dust gun

Specifications

| | |
|----------------------|---|
| Fastener series | 16 gauge C series finish nails |
| Pressure range | 70 – 120 psi |
| Max. capacity | 100 nails |
| Dimensions | 295 x 285mm |
| Weight | 1.7kg |
| Standard accessories | Nose protector, safety glasses and carry case |



NT65MA4(H2Z) 65mm DA Series Finish Nailer



4966376297283

- Both single & bump fire
- Tool-less depth dial
- Tool-less release for clearing jammed nails
- 360° adjustable exhaust directs air away from user
- Unique integrated air duster acts as a dust gun

Specifications

| | |
|----------------------|---|
| Fastener series | 15 gauge DA series finish nails |
| Pressure range | 70 – 120 psi |
| Max. capacity | 100 nails |
| Dimensions | 344 x 304mm |
| Weight | 1.9kg |
| Standard accessories | Nose protector, safety glasses and carry case |



Pneumatic

NR90AD(H4Z) 90mm Framing Nailer



9323624028627

- Both single & bump fire
- Tool-less depth dial
- Heavy-duty design
- Magazine with bypass for faster reload speed
- Replacement O-Ring kit (884991)

Specifications

| | | |
|----------------------|---|----------|
| Fastener series | Paper collated clipped head strip nails | |
| Pressure range | 70 – 120 psi | |
| Max. capacity | 50 x 2.8mm | 95 nails |
| | 75 x 3.06mm | 90 nails |
| | 90 x 3.3mm | 85 nails |
| Dimensions | 462 x 322mm | |
| Weight | 3.2kg | |
| Standard accessories | Safety glasses and hanger bracket | |



NV65AF3(H1Z) 65mm Wire & Plastic Collated Coil Nailer



4966376297337

- Both single & bump fire
- Tool-less depth dial
- 360° adjustable exhaust directs air away from user

Specifications

| | |
|----------------------|--|
| Fastener series | 16° wire collated or 15° plastic collated coil nails |
| Pressure range | 70 – 120 psi |
| Max. capacity | 200 - 400 nails |
| Dimensions | 282 x 297mm |
| Weight | 1.9kg |
| Standard accessories | Nose protector, safety glasses and carry case |



Application Guide for Pneumatics

Pneumatic

| Application | N3804AB3 | NT50AE2 | NT65M2 | NT65MA4 | NR90AD | NV65AF3 |
|--------------------------------------|----------|---------|--------|---------|--------|---------|
| Furniture and Upholstry | • | | | | | |
| Hand and Hobby Crafts | • | • | | | | |
| Panelling and Picture Framing | • | • | • | | | |
| Shop Fitting and Cabinet Making | • | • | • | • | | |
| Finish Nailing Timber & Plastic Trim | | • | • | | | |
| All Fine Fit Out Work | | • | | | | |
| Skirting Boards | | • | • | • | | |
| Door Jambs | | | • | • | | |
| Architraves | | • | • | • | | |
| Construction of Eaves | | | • | • | | |
| Window Manufacture | | | | • | | |
| House Framing and Roof Trusses | | | | | • | |
| Decking and Fencing | | | | | • | • |
| Flooring | | | | | • | |
| Cladding | | | | | • | • |
| Pallet and Crate Manufacture | | | | | • | • |
| Ply Bracing and Strapping | | | | | | • |
| Triple Grips and Joist Hangers | | | | | | • |
| Tile Underlay | | | | | | • |

03 Drilling and Fastening



Quick Reference Guide For Drills

| Model | Handle Type | Steel Drilling Dia. (mm) | No Load Speed (min ⁻¹) | Power Input (W) | Speed Control | | | High Torque |
|------------|-------------|--------------------------|------------------------------------|-----------------|----------------|---------|------------|-------------|
| | | | | | Variable Speed | 2-Speed | Reversible | |
| D13VL(H6Z) | Pistol grip | 13 | 0 - 1,100 / 0 - 3,000 | 860 | • | • | • | |
| D13VG(H1Z) | Pistol grip | 13 | 0 - 600 | 710 | • | | • | • |
| D13(H1Z) | D-shaped | 13 | 550 | 720 | | | • | • |

D13VL(H6Z) 13mm Drill with Safety Slip Clutch



4966376271221

- All metal keyless chuck
- AHB (Aluminium Housing Body)
- Safety slip clutch
- Variable speed trigger and dial
- Carbon brush rotation system increases power and extends brush life

Specifications

| | | |
|---------------|--------------|--------------------------------|
| Chuck | 13mm keyless | |
| Capacity | Steel | 13mm |
| | Wood | 40mm |
| Input power | 860W | |
| No load speed | High | 0 - 3,000 (min ⁻¹) |
| | Low | 0 - 1,100 (min ⁻¹) |



| | |
|----------------------|-----------------------------|
| Weight | 2.9kg |
| Length | 363mm |
| Standard accessories | Side handle and depth gauge |

D13VG(H1Z) 13mm Keyed 710W High Torque Drill



4966376270972

- Heavy-duty keyed chuck
- Aluminium gear cover and inner cover
- Variable speed
- Forward and reverse
- Suitable for auger, hole saw and mixing applications

Specifications

| | | |
|-------------|-------------------|-------|
| Chuck | 13mm keyed | |
| Capacity | Steel - twist bit | 13mm |
| | Steel - hole saw | 70mm |
| | Wood - spade bit | 40mm |
| | Wood - auger | 38mm |
| | Wood - hole saw | 114mm |
| Input power | 710W | |



| | |
|----------------------|---|
| Max. torque | 78Nm |
| No load speed | 0 - 600 (min ⁻¹) |
| Weight | 2.1kg |
| Length | 287mm |
| Standard accessories | Chuck key, side handle, handle extension and carry case |

D13(H1Z) 13mm High Torque Drill



- Triple reduction gearing for high torque applications
- Heavy-duty keyed chuck
- Aluminium front cover
- Forward and reverse
- Ideal for auger and mixing applications

Specifications

| | | |
|---------------|--------------------------|------|
| Chuck | 13mm keyed | |
| Capacity | Steel | 13mm |
| | Wood | 40mm |
| Input power | 720W | |
| No load speed | 550 (min ⁻¹) | |

| | |
|----------------------|---|
| Max. torque | 54Nm |
| Weight | 3.0kg |
| Length | 378mm |
| Standard accessories | Chuck key, "D" shaped rear handle and side handle |



B16RM(HWZ) 16mm Keyed 75W Pedestal Drill Press



- Variable speed (12 speed sections)
- Keyed on/off switch
- Cast iron table surface
- Laser guide for accurate drilling
- Depth adjustment gauge

Specifications

| | | |
|----------------------------|---------------------------------------|------------------------------|
| Chuck | 16mm keyed | |
| Capacity | Swing | 380mm (throat depth - 190mm) |
| | Spindle travel | 85mm |
| Input power | 750W induction motor | |
| Rotation speed (12 speeds) | 210 - 2,580 (min ⁻¹) | |
| Table size | 336 x 336mm | |
| Table tilt | 45° left or right | |
| Weight | 75kg | |
| Length | 1,618mm | |
| Standard accessories | Chuck key, wedge (drift) and hex keys | |



Quick Reference Guide For Impact (Hammer) Drills

| Model | Handle Type | Concrete Drilling Dia. (mm) | No Load Speed (min-1) | Power Input (W) | Speed Control | | | Application | |
|--------------|-------------|-----------------------------|-----------------------|-----------------|----------------|---------|------------|-------------|------------|
| | | | | | Variable Speed | 2-Speed | Reversible | Medium Duty | Heavy-duty |
| DV16VSS(HAZ) | Pistol grip | 16 | 0 - 2,900 | 600 | • | | • | • | |
| DV20VD(H1Z) | Pistol grip | 20 | 0 - 1,100 / 0 - 3,000 | 860 | • | • | • | | • |
| DV22V(H6Z) | Pistol grip | 22 | 0 - 1,100 / 0 - 3,000 | 1,120 | • | • | • | | • |



DV16VSS(HAZ)
13mm Impact Drill



- Lightweight and compact
- Variable speed trigger
- Forward and reverse
- Durable cylindrical housing

| Specifications | | |
|----------------------|---|------|
| Chuck | 13mm keyless | |
| | Concrete | 16mm |
| Capacity | Steel | 13mm |
| | Wood | 25mm |
| Input power | 600W | |
| No load speed | 0 - 2,900 (min ⁻¹) | |
| Impact rate | 0 - 34,500 (min ⁻¹) | |
| Weight | 1.5kg | |
| Length | 269mm | |
| Standard accessories | Side handle, depth gauge and carry case | |

DV20VD(H1Z) 20mm Impact Drill



- Heavy-duty keyed chuck
- AHB (Aluminium Housing Body)
- Full speed reverse
- Variable speed trigger and dial
- Carbon brush rotation system increases power and extends brush life



Drilling

Specifications

| | | |
|---------------|------------|--------------------------------|
| Chuck | 13mm keyed | |
| | Concrete | 20mm |
| Capacity | Steel | 13mm |
| | Wood | 40mm |
| Input power | 860W | |
| No load speed | Low | 0 - 1,100 (min ⁻¹) |
| | High | 0 - 3,000 (min ⁻¹) |

| | | |
|----------------------|--|---------------------------------|
| Impact rate | Low | 0 - 8,100 (min ⁻¹) |
| | High | 0 - 22,000 (min ⁻¹) |
| Weight | 3.0kg | |
| Length | 365mm | |
| Standard accessories | Chuck key, side handle, depth gauge and stackable case | |

DV22V(H6Z) 22mm Impact Drill with Safety Slip Clutch



- All metal keyless chuck
- AHB (Aluminium Housing Body)
- Safety slip clutch
- Full speed reverse
- Lock off (deadman) variable speed trigger and dial
- Carbon brush rotation system increases power and extends brush life



Specifications

| | | |
|---------------|--------------|--------------------------------|
| Chuck | 13mm keyless | |
| | Concrete | 22mm |
| Capacity | Steel | 13mm |
| | Wood | 40mm |
| Input power | 1,120W | |
| No load speed | Low | 0 - 1,100 (min ⁻¹) |
| | High | 0 - 3,000 (min ⁻¹) |

| | | |
|----------------------|--|---------------------------------|
| Impact rate | Low | 0 - 8,100 (min ⁻¹) |
| | High | 0 - 22,000 (min ⁻¹) |
| Weight | 3.0kg | |
| Length | 363mm | |
| Standard accessories | Chuck key, side handle, depth gauge and stackable case | |

Quick Reference Guide for Screw Drivers

| Model | No Load Speed (min-1) | Power Input (W) | Applicable Fasteners | | | | Weight (kg) |
|------------|--------------------------|--------------------|----------------------|------------------------|---------------|------------|----------------|
| | | | Machine Screw | Self Drilling Screw | Drywall Screw | Wood Screw | |
| W6VB3(H1Z) | 0 - 2,600 | 620 | 6mm | 6mm | 6mm | 5.8mm | 1.5 |
| W8VB2(H1Z) | 0 - 1,700 | 620 | 6mm | 8mm | 6mm | 6.2mm | 1.5 |

W6VB3(H1Z) Screw Driver



- Ideal for self-drilling / TEK screw
- Variable speed
- Forward and reverse
- Aluminium cover and inner cover for increased durability



Specifications

| | | | | | |
|-----------|---------------------|-------|----------------------|--|-------------------------------------|
| Bit shank | 6.35mm hex | | Input power | | 620W |
| | Machine screw | 6mm | No load speed | | 0 - 2,600 (min ⁻¹) |
| Capacity | Drywall screw | 6mm | Weight | | 1.5kg |
| | Self-drilling screw | 6mm | Length | | 312mm |
| | Wood screw | 5.8mm | Standard accessories | | Magnetic hex socket and sub stopper |

W8VB2(H1Z) Screw Driver



- Ideal for self-drilling / TEK screw
- Variable speed
- Forward and reverse
- Aluminium cover and inner cover for increased durability



Specifications

| | | | | | |
|-----------|---------------------|-------|----------------------|--|-------------------------------------|
| Bit shank | 6.35mm hex | | Input power | | 620W |
| | Machine screw | 6mm | No load speed | | 0 - 1,700 (min ⁻¹) |
| Capacity | Drywall screw | 6mm | Weight | | 1.5kg |
| | Self-drilling screw | 8mm | Length | | 312mm |
| | Wood screw | 6.2mm | Standard accessories | | Magnetic hex socket and sub stopper |

WR22SE(H1Z) 19mm (3/4") Brushless Impact Wrench



4966376290031

- AHB (Aluminium Housing Body)
- Soft grip handle
- Adjustable side handle
- Can be used with a petrol powered generator

Specifications

| | | |
|----------------------|--|-----------|
| Drive | 19mm (3/4") | |
| Capacity | Ordinary bolt | 14 - 24mm |
| | High tension bolt | 16 - 22mm |
| Input power | 800W* | |
| Torque | 620Nm | |
| No load speed | 1,400 (min ⁻¹) | |
| Impact rate | 2,000 (min ⁻¹) | |
| Weight | 4.6kg | |
| Length | 280mm | |
| Standard accessories | Side handle and carry case. Socket not included | |

*800W brushless motor is equivalent to 950W brushed motor



Fastening

WR25SE(H1Z) 25.4mm (1") Brushless Impact Wrench



4966376290222

- AHB (Aluminium Housing Body)
- Soft grip handle
- Adjustable side handle
- Can be used with a petrol powered generator

Specifications

| | | |
|----------------------|--|-----------|
| Drive | 25.4mm (1") | |
| Capacity | Ordinary bolt | 22 - 30mm |
| | High tension bolt | 22 - 24mm |
| Input power | 900W* | |
| Torque | 1,000Nm | |
| No load speed | 1,100 (min ⁻¹) | |
| Impact rate | 1,500 (min ⁻¹) | |
| Weight | 7.7kg | |
| Length | 340mm | |
| Standard accessories | Side handle and carry case. Socket not included | |

*900W brushless motor is equivalent to 1070W brushed motor





Fast & Smooth Drill

HiKOKI high performance power tools are designed to make your job easier and get it done faster so you can spend less time working and more time living.

HiKOKI
HIGH PERFORMANCE POWER TOOLS

04

Rotary and Demolition



Quick Reference Guide For Rotary Hammers

| Model | Concrete Drilling Dia. (mm) | Brushless Motor | Speed Control | | Function Mode | | | Safety Clutch | Bit Shank Type | |
|--------------|-----------------------------|-----------------|---------------|------------|-----------------|---------------|----------------|---------------|----------------|---------|
| | | | Variable | Reversible | Hammer Drilling | Drilling Only | Hammering Only | | SDS Plus | SDS Max |
| DH26PC2(H1Z) | 26 | | • | • | • | • | • | • | • | |
| DH28PEC(H1Z) | 28 | • | • | • | • | • | • | • | • | |
| DH40MC(H1Z) | 40 | | • | | • | | • | | | • |
| DH40MEY(H1Z) | 40 | • | • | | • | | • | • | | • |
| DH45MEY(H1Z) | 45 | • | • | | • | | • | • | | • |
| DH52MEY(H1Z) | 52 | • | • | | • | | • | • | | • |

DH26PC2(H1Z) 26mm SDS Plus Rotary Hammer



- 3 mode action: hammer drilling, drilling only and hammering only
- Compact size for improved user comfort
- Idle striking prevention mechanism reduces vibration and noise
- Variable speed
- Forward and reverse functionality



Specifications

| | | |
|---------------|--------------------------------|------|
| Bit Shank | SDS Plus | |
| Capacity | Concrete | 26mm |
| | Steel | 13mm |
| | Wood | 32mm |
| Input power | 830W | |
| No load speed | 0 - 1,100 (min ⁻¹) | |

| | |
|----------------------|---|
| Full load Impact | 0 - 4,300 (min ⁻¹) |
| Impact energy | 2.9j |
| Weight | 2.8kg |
| Length | 349mm |
| Standard accessories | Side handle, depth gauge and carry case |

DH28PEC(H1Z) 28mm SDS Plus Brushless Rotary Hammer



- 3 mode action: hammer drilling, drilling only and hammering only
- Includes a soft grip side handle to further improve user comfort
- Forward and reverse functionality
- Constant speed control to minimise variation in rotation speed and impact rate



Specifications

| | | |
|------------------|--------------------------------|------|
| Bit Shank | SDS Plus | |
| Capacity | Concrete | 28mm |
| | Steel | 13mm |
| | Wood | 32mm |
| Input power | 900W | |
| No load speed | 0 - 950 (min ⁻¹) | |
| Full load Impact | 0 - 4,300 (min ⁻¹) | |

| | |
|----------------------|--|
| Impact energy | 3.4j |
| Weight | 3kg |
| Length | 355mm |
| Standard accessories | Side handle, depth gauge, and carry case |

**BRUSH
LESS**
Brushless Motor



AC Brushless Motor Series

Long-lasting efficiency.

The professional no longer has to worry about losing voltage and power when using an extension cord. Our AC Brushless Motor series feature electronic control that offers continuous and constant power output. This technology brings a whole new level of performance and durability to our heavy duty range of power tools. With the innovative AC Brushless Motor you'll experience more power and less energy consumption.

We have also eliminated some major wearing parts, which means a compact and lightweight power tool, less wear and tear and less maintenance. This also contributes to the fact that the motor lasts longer and operates far more efficiently than conventional brushed motors.

HIKOKI
HIGH PERFORMANCE POWER TOOLS

DH40MEY(H1Z) 40mm SDS Max Brushless Rotary Hammer

4966376284696

- 2-mode action: hammer drilling and hammering only
- UVP (User Vibration Protection) shock absorbing handle & internal vibration absorber
- AHB (Aluminium Housing Body)
- 12 stage adjustable tool bit angle
- Push button adjustable impact rate and variable speed
- Can be used with a petrol powered generator
- Safety slip clutch

**Specifications**

| | | |
|------------------|--|-------|
| Bit Shank | SDS Max | |
| Capacity | Concrete - drill bit | 40mm |
| | Concrete - core bit | 105mm |
| Input power | 1,150W | |
| No load speed | 250, 330, 410 & 500 (min ⁻¹) | |
| Full load Impact | 1,430, 1,900, 2,370 & 2,850 (min ⁻¹) | |

| | |
|----------------------|--|
| Impact energy | 11j |
| Weight | 7.5kg |
| Length | 477mm |
| Standard accessories | Side handle, depth gauge, grease pack and carry case |

DH45MEY(H1Z) 45mm SDS Max Brushless Rotary Hammer

4966376284979

- 2-mode action: hammer drilling and hammering only
- UVP (User Vibration Protection) shock absorbing handle & internal vibration absorber
- AHB (Aluminium Housing Body)
- 12 stage adjustable tool bit angle
- Push button adjustable impact rate and variable speed
- Can be used with a petrol powered generator
- Safety slip clutch

**Specifications**

| | | |
|-------------|----------------------|-------|
| Bit Shank | SDS Max | |
| Capacity | Concrete - drill bit | 45mm |
| | Concrete - core bit | 125mm |
| Input power | 1,500W | |

| | |
|----------------------|--|
| No load speed | 120, 180, 240 & 310 (min ⁻¹) |
| Full load Impact | 1,200, 1,700, 2,300 & 2,950 (min ⁻¹) |
| Impact energy | 13.4j |
| Weight | 9.5kg |
| Length | 535mm |
| Standard accessories | Side handle, depth gauge, grease pack and carry case |

Quick Reference Guide For Demolition Hammers

| Model | Bit Shank Type | Weight (kg) | Brushless Motor | AHB | UVP | Shock Absorbing Handle | Adjustable Side Handle | Impact Energy Per Stroke (Joules) |
|-------------|----------------|-------------|-----------------|-----|-----|------------------------|------------------------|-----------------------------------|
| H41ME(H1Z) | SDS Max | 5.1 | • | | | • | • | 10 |
| H45MEY(H1Z) | SDS Max | 7.3 | • | • | • | • | • | 13.5 |
| H60MEY(H1Z) | SDS Max | 12.2 | • | • | • | • | • | 26.5 |
| H65SB3(H1Z) | 30mm Hex | 18 | | • | • | • | • | 45 |
| H90SG(H1Z) | 28.5mm Hex | 32 | | • | • | • | | 70 |

H41ME(H1Z) 5.1kg SDS Max Brushless Demolition Hammer



- AC Brushless motor for improved durability and performance
- LVH (Low vibration handle) for improved user comfort
- One-touch tool holder allowing for faster and easier bit swapping
- Can be used with a petrol powered generator



Specifications

| | |
|------------------|--|
| Bit Shank | SDS Max |
| Input power | 1,050W |
| Full load Impact | 1,500, 2,000, 2,500 & 2,870 (min ⁻¹) |
| Impact energy | 10j |

| | |
|----------------------|--|
| Weight | 5kg |
| Length | 427mm |
| Standard accessories | 280mm bull point, side handle and carry case |

H45MEY(H1Z) 7.3kg SDS Max Brushless Demolition Hammer



- UVP (User Vibration Protection) shock absorbing handle & internal vibration absorber
- AHB (Aluminium Housing Body)
- 12 stage adjustable tool bit angle
- Push button adjustable impact rate
- Can be used with a petrol powered generator
- Overload protection



Specifications

| | |
|------------------|--|
| Bit Shank | SDS Max |
| Input power | 1,150W |
| Full load Impact | 1,430, 1,900, 2,370 & 2,850 (min ⁻¹) |
| Impact energy | 13.5j |

| | |
|----------------------|--|
| Weight | 7.3kg |
| Length | 480mm |
| Standard accessories | 280mm bull point, side handle and carry case |

H60MEY(H1Z) 12.2kg SDS Max Brushless Demolition Hammer



4966376288663

- UVP (User Vibration Protection) shock absorbing handle & internal vibration absorber
- AHB (Aluminium Housing Body) for increased motor durability
- 12 stage adjustable tool bit angle
- Push button adjustable impact rate
- Can be used with a petrol powered generator
- Overload protection

Specifications

| | |
|------------------|--|
| Bit Shank | SDS Max |
| Input power | 1,500W |
| Full load Impact | 1,500, 1,700, 1,900 & 2,100 (min ⁻¹) |
| Impact energy | 26.5j |

| | |
|----------------------|--|
| Weight | 12.2kg |
| Length | 585mm |
| Standard accessories | 280mm bull point, side handle and carry case |



H65SB3(H1Z) 18kg 30mm Hex Demolition Hammer



4966376288786

- High demolishing performance with low vibration and noise
- UVP (User Vibration Protection) shock absorbing handle & internal vibration absorber
- AHB (Aluminium Housing Body)
- Large trigger switch with lock on function
- Service kit available (371002)
- Hard carry case available (339664)

Specifications

| | |
|----------------------|---|
| Bit Shank | 30mm Hex |
| Input power | 1,400W |
| Full load Impact | 1,400 (min ⁻¹) |
| Impact energy | 45j |
| Weight | 18kg |
| Length | 731mm |
| Standard accessories | Bull point, chisel, hex bar wrench and carry case with wheels |

30mm Hexagon with Collar



| Description | Size (mm) | Product Code | Barcode |
|-------------|-----------|--------------|---------------|
| Bull Point | 410 | 401036 | 4549115002043 |
| Cold Chisel | 35 x 410 | 401990 | 4549115045293 |



H90SG(H1Z) 32kg 28.5mm Hex Demolition Hammer



4966376289066

- Designed for heavy demolition work
- UVP (User Vibration Protection) shock absorbing handle & internal vibration absorber
- Ergonomic soft grip handles
- Ideal substitute for air operated compressor equipment
- Service kit available (338319)

Specifications

| | |
|----------------------|----------------------------|
| Bit Shank | 28.5mm |
| Input power | 2,000W |
| Full load Impact | 1,000 (min ⁻¹) |
| Impact energy | 70j |
| Weight | 32kg |
| Length | 860mm |
| Standard accessories | Hex bar wrench (M6) |


28mm Hexagon with Collar



| Description | Size (mm) | Product Code | Barcode |
|-------------|-----------|--------------|---------------|
| Bull Point | 550 | 751571 | 8717472818539 |
| Cold Chisel | 36 x 550 | 751572 | 8717472818546 |



05 Grinding and Cutting

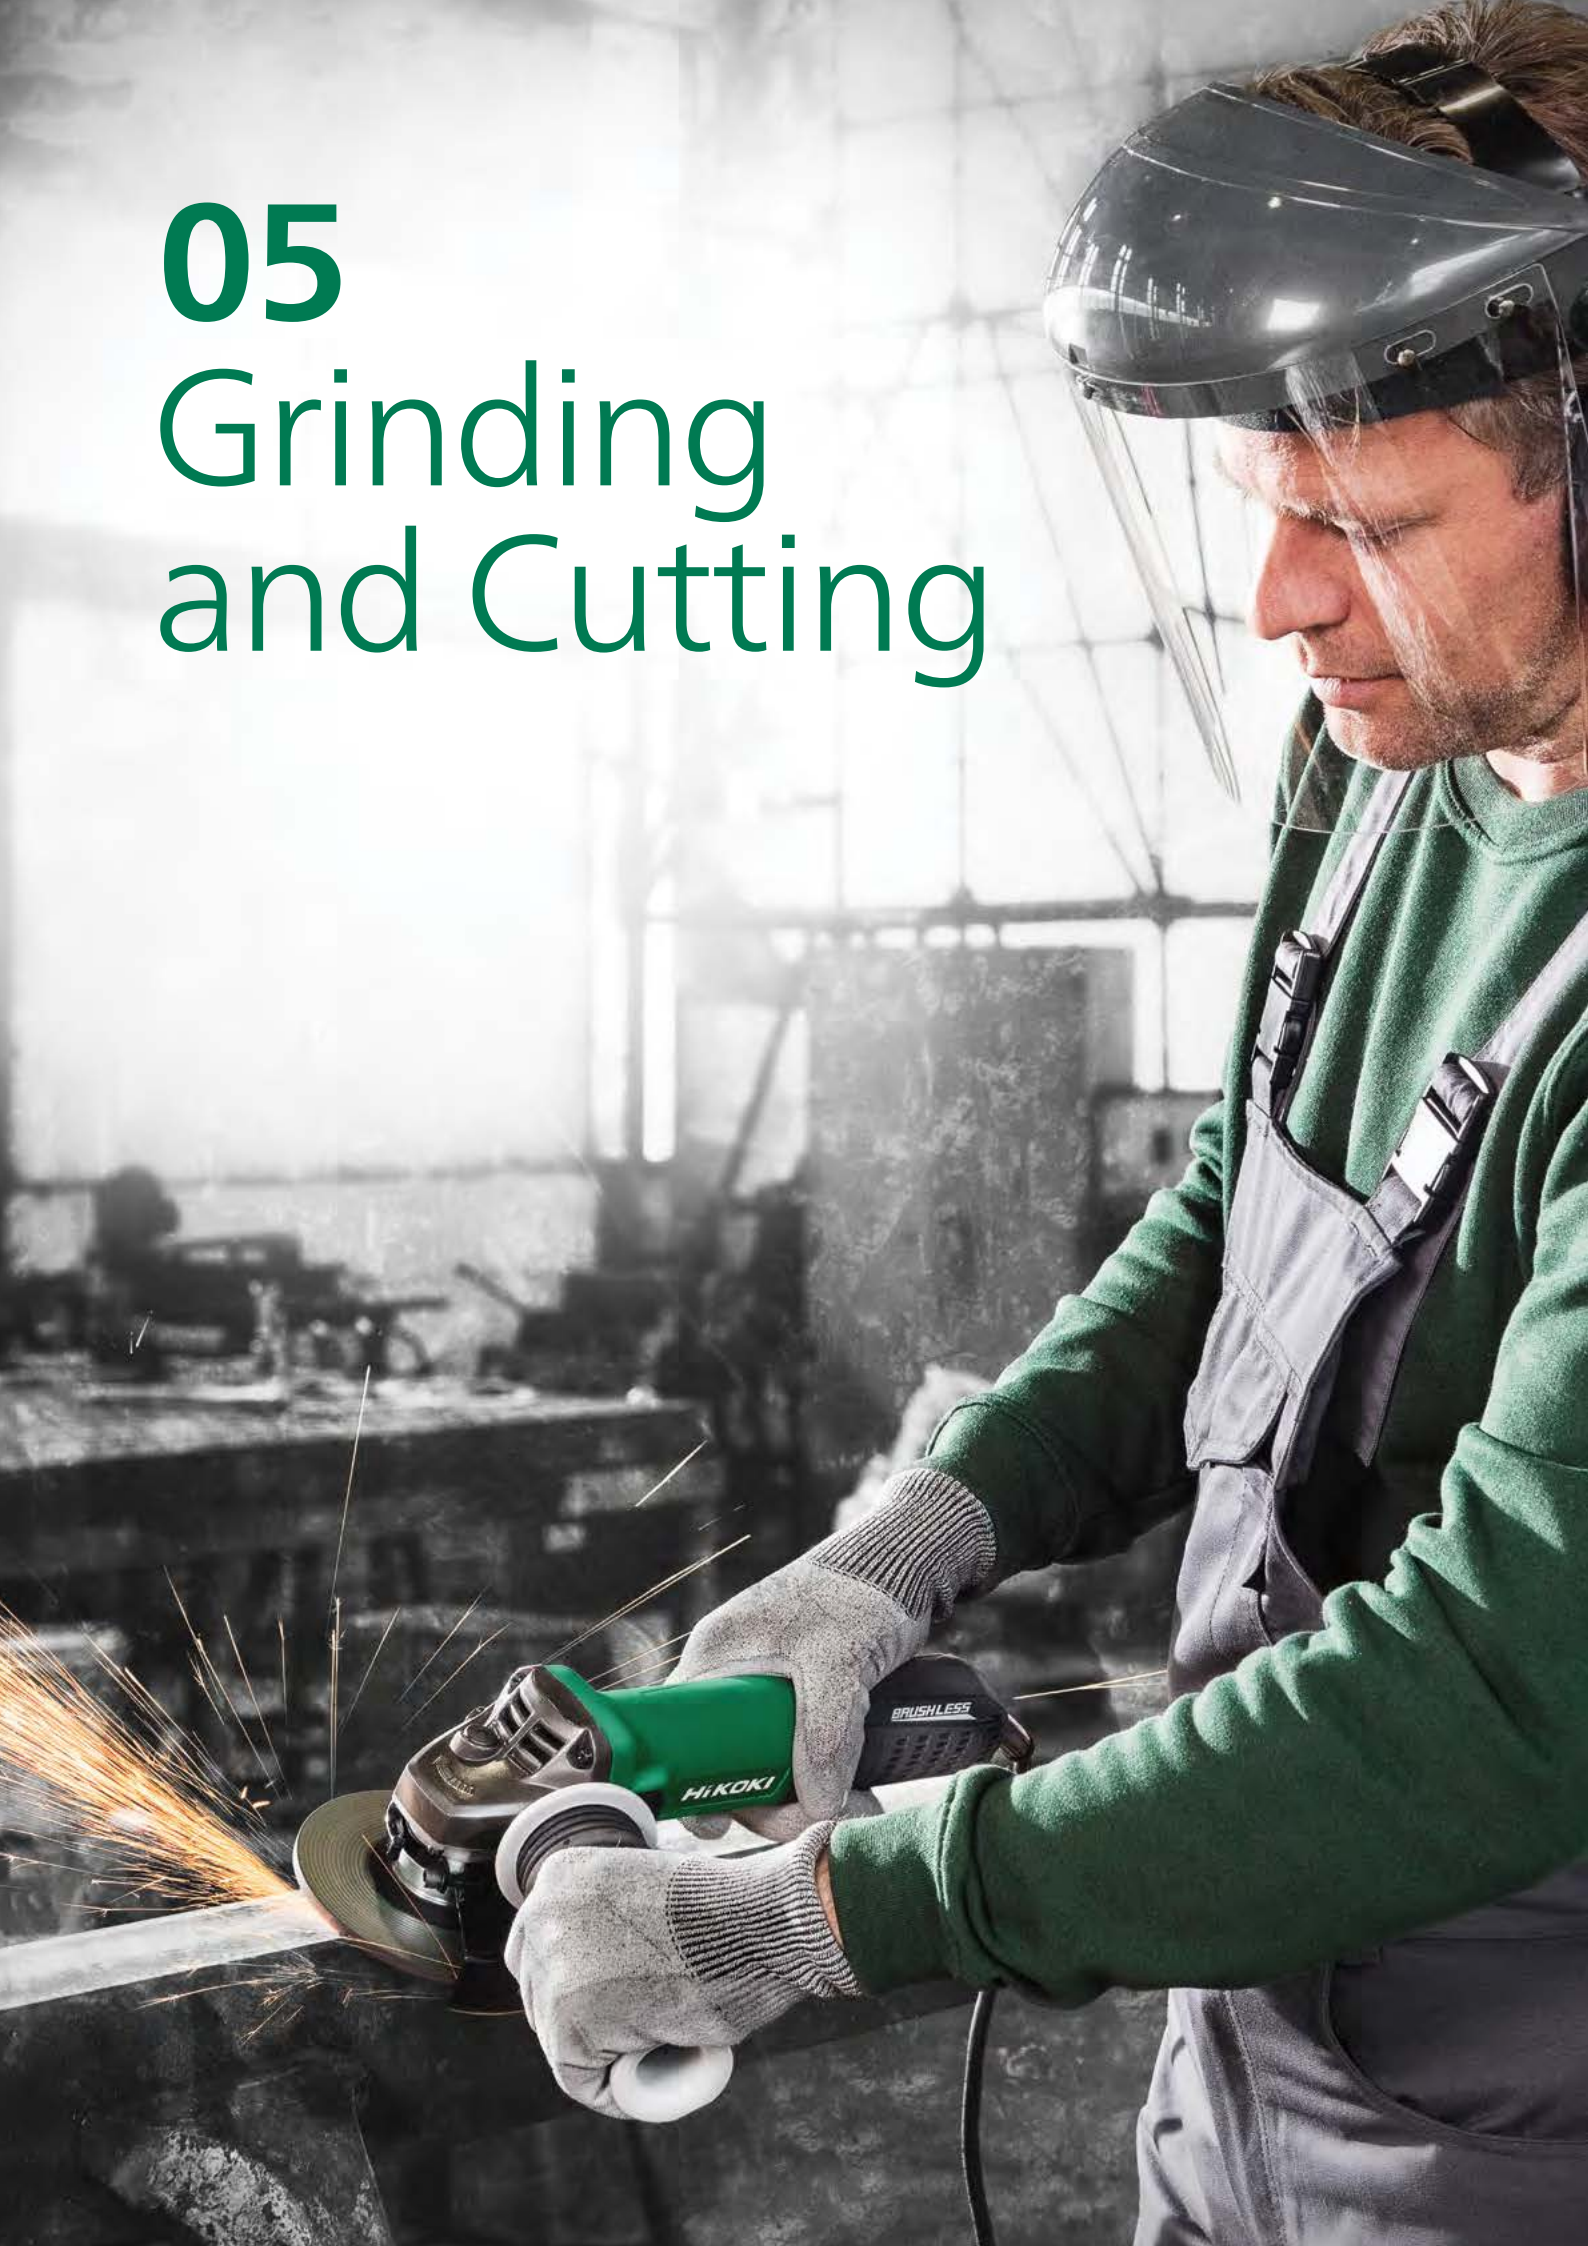

Quick Reference Guide for Grinders

| Model | Wheel Diameter (mm) | Input Power (W) | No Load Speed (min ⁻¹) | Switch Type | Safety (Deadman) Switch | Lock On Switch | Anti-vibration Handle | UVP | Spindle Thread | Weight (kg) |
|--------------|---------------------|-----------------|------------------------------------|-------------|-------------------------|----------------|-----------------------|-----|----------------|-------------|
| G10SR4(H6Z) | 100 | 730 | 10,000 | Slide | | • | | | M10 x 1.5 | 1.7 |
| G13SR4(H6Z) | 125 | 730 | 10,000 | Slide | | • | | | M14 x 2 | 1.8 |
| G13YC2(H1Z) | 125 | 1,430 | 10,500 | Paddle | • | | • | | M14 x 2 | 2.0 |
| G13SC2(H1Z) | 125 | 1,200 | 10,000 | Trigger | • | | • | | M14 x 2 | 2.8 |
| G18SE4 | 180 | 2,400 | 8,500 | Trigger | • | | • | | M14 x 2 | 5.9 |
| G23ST(H1Z) | 230 | 2,000 | 6,600 | Trigger | • | | | | M14 x 2 | 5.0 |
| G23UDY2(H1Z) | 230 | 2,400 | 6,600 | Trigger | • | | • | • | M14 x 2 | 6.3 |

G10SR4(H6Z) 100mm Angle Grinder with Slide Switch



- Lightweight and compact
- Lockable slide switch
- Two position side handle



Specifications

| | |
|----------------|-----------------------------|
| Wheel diameter | 100mm |
| Input power | 730W |
| No load speed | 10,000 (min ⁻¹) |
| Hole diameter | 16mm |
| Spindle thread | M10 x 1.5 |

| | |
|----------------------|--|
| Weight | 1.7kg |
| Length | 258mm |
| Standard accessories | Side handle, grinding wheel, wrench and carry case |

G13SR4(H6Z) 125mm Angle Grinder with Slide Switch



- Lightweight and compact
- Lockable slide switch two position side handle



Specifications

| | |
|----------------|-----------------------------|
| Wheel diameter | 125mm |
| Input power | 730W |
| No load speed | 10,000 (min ⁻¹) |
| Hole diameter | 22.2mm |
| Spindle thread | M14 x 2 |

| | |
|----------------------|--|
| Weight | 1.8kg |
| Length | 258mm |
| Standard accessories | Side handle, grinding wheel, wrench and carry case |

G13SB4(H1Z) 125mm Angle Grinder with Slide Switch



4966376331314

- Smallest diameter grip in its class at 203mm
- Excellent cutting and grinding performance
- Wear resistant armature coil
- Newly developed tool-less wheel guard
- Anti-vibration handle



Specifications

| | |
|----------------|-----------------------------|
| Wheel diameter | 125mm |
| Input power | 1,400W |
| No load speed | 11,500 (Min ⁻¹) |
| Hole diameter | 22.2mm |

| | |
|----------------------|--|
| Spindle thread | M14 x 2 |
| Weight | 2.4kg |
| Length | 288mm |
| Standard accessories | Anti-vibration handle, grinding wheel and wrench |

G13SC2(H1Z) 125mm Angle Grinder with Trigger (Deadman) Switch



4966376273867

- Powerful motor for heavy-duty applications
- Rear trigger (deadman) switch for user safety and manoeuvrability
- Three position anti-vibration handle



Specifications

| | |
|----------------|-----------------------------|
| Wheel diameter | 125mm |
| Input power | 1,200W |
| No load speed | 10,000 (min ⁻¹) |
| Hole diameter | 22.2mm |

| | |
|----------------------|--|
| Spindle thread | M14 x 2 |
| Weight | 2.8kg |
| Length | 391mm |
| Standard accessories | Side handle, grinding wheel and wrench |

G13SE3(H1Z) 125mm Angle Grinder with Paddle (Deadman) Switch



4966376331451

- Smallest diameter grip in its class at 167mm
- Excellent cutting and grinding performance
- Wear resistant armature coil
- Newly developed tool-less wheel guard
- Anti-vibration handle



Specifications

| | |
|----------------|-----------------------------|
| Wheel diameter | 125mm |
| Input power | 1,400W |
| No load speed | 11,500 (Min ⁻¹) |
| Hole diameter | 22.2mm |
| Spindle thread | M14 x 2 |

| | |
|----------------------|---|
| Weight | 2.5kg |
| Standard accessories | Anti-vibration handle, depressed centre wheel 125mm (5") and wrench |

G13YC2(H1Z) 125mm Angle Grinder with Paddle (Deadman) Switch



4966376275045

- Paddle (deadman) switch for user safety
- Constant speed control, soft start, overload protection, kick back protection and restart protection
- Tool-less wheel guard adjustment
- Suitable for mining, petroleum and gas industry, maintenance and construction industries
- Two position anti-vibration handle

Specifications

| | |
|----------------|-----------------------------|
| Wheel diameter | 125mm |
| Input power | 1,430W |
| No load speed | 10,500 (min ⁻¹) |
| Hole diameter | 22.2mm |
| Spindle thread | M14 x 2 |



| | |
|----------------------|---|
| Weight | 2.0kg |
| Length | 323mm |
| Standard accessories | Anti-vibration side handle, grinding wheel, hex wrench and wrench |

G13BYEQ(H1Z) 125mm Brushless Angle Grinder with Paddle (Deadman) Switch



4966376333813

- Kick back protection control
- Voltage restart protection control
- Efficient grinding performance

Specifications

| | |
|----------------|-----------------------------|
| Wheel diameter | 125mm |
| Input power | 1320W |
| No load speed | 10,000 (Min ⁻¹) |
| Hole diameter | 22.2mm |



| | |
|----------------------|---|
| Spindle thread | M14 x 2 |
| Weight | 2.2Kg |
| Length | 309mm |
| Standard accessories | Anti-vibration side handle, grinding wheel and wrench |

G18SE4(H1Z) 180mm Angle Grinder with Trigger (Deadman) Switch



4966376331239

- High-power split core motor provides less weight
- Excellent overload durability allowing the tool to maintain high load applications for longer
- Vibration-absorbing side handle
- Tool-less wheel guard
- Restart protection for improved user safety

Specifications

| | |
|----------------|----------------------------|
| Wheel diameter | 180mm |
| Input power | 2,400W |
| No load speed | 8,500 (min ⁻¹) |
| Hole diameter | 22.2mm |



| | |
|----------------------|---|
| Spindle thread | M14 x 2 |
| Weight | 5.9kg |
| Length | 492mm |
| Standard accessories | Anti-vibration side handle, grinding wheel and wrench |

G23ST(H1Z) 230mm Angle Grinder with Trigger (Deadman) Switch



4966376276660

- Rear trigger (deadman) switch for user safety and manoeuvrability
- Tool-less wheel guard adjustment
- Three position handle



Specifications

| | |
|----------------|----------------------------|
| Wheel diameter | 230mm |
| Input power | 2,000W |
| No load speed | 6,600 (min ⁻¹) |
| Hole diameter | 22.2mm |
| Spindle thread | M14 x 2 |

| | |
|----------------------|--|
| Weight | 5.1kg |
| Length | 469mm |
| Standard accessories | Side handle, wrench and grinding wheel |

G23UDY2(H1Z) 230mm Angle Grinder with Trigger (Deadman) Switch



4966376325863

- UVP (User Vibration Protection)
- Rear trigger (deadman) switch for user safety and manoeuvrability
- Electronic soft start and restart protection
- Tool-less wheel guard adjustment
- Low vibration side handle



Specifications

| | |
|----------------|----------------------------|
| Wheel diameter | 230mm |
| Input power | 2,400W |
| No load speed | 6,600 (min ⁻¹) |
| Hole diameter | 22.2mm |

| | |
|----------------------|---|
| Spindle thread | M14 x 2 |
| Weight | 6.3kg |
| Length | 500mm |
| Standard accessories | Anti-vibration side handle, grinding wheel and wrench |

CM5MA(H1Z) 125mm Wall Chaser

NEW



- High cutting performance
- Efficient cutting speed
- Constant speed control

Specifications

| | |
|------------------------------------|---|
| Voltage | 230 V |
| Rated input power | 1,900 W |
| Minimum cutting depth | 10 mm |
| Maximum cutting depth | 40 mm |
| Maximum cutting width | 35 mm |
| Diameter of diamond cut-off wheels | 125 mm |
| No-load speed | 5,000 mm |
| Vibration level under load | 5.5 m/s ² |
| Noise level under load | 111.3 dB (A) |
| Weight without cable | 4.7 kg |
| Dimensions (L x W x H) | 437 x 195 x 175 mm |
| Standard Accessories | 2-hole spanner, chase chisel and diamond cut-off wheels |



GM13Y(H1Z) AC Concrete Grinder

NEW



- High performance motor
- Adjustable speed to suit multiple applications
- Robust and durable construction
- Restart protection and soft start feature

Specifications

| | |
|----------------------------|--------------------------------------|
| Voltage | 230 V |
| Rated input power | 1,900 W |
| Max. diameter of accessory | 125 mm |
| No-load speed | 3,800 to 8,200 min ⁻¹ |
| Vibration level under load | 6.94 m/s ² |
| Noise level under load | 103.0 dB (A) |
| Weight without cable | 3.6 kg |
| Dimensions (L x W x H) | 475 x 199 x 125 mm |
| Standard Accessories | 2-hole spanner and diamond cup wheel |



GP2S2(H1Z) 25mm Die Grinder



4966376277568

- High speed for better finishing applications
- Extended front housing for hard to reach areas
- All ball bearing construction for extended tool life



Specifications

| | |
|----------------------|-----------------------------|
| Max. wheel diameter | 25mm |
| Collet chuck | 6.35mm (standard) |
| Input power | 520W |
| No load speed | 29,000 (min ⁻¹) |
| Weight | 1.7kg |
| Length | 359mm |
| Standard accessories | Side handle and wrench |

Grinding and
Cutting

GP5V(H1Z) 50mm Die Grinder



4966376277735

- High speed for better finishing applications
- Constant and variable speed control
- Soft start
- Extended front housing for hard to reach areas
- All ball bearing construction for extended tool life



Specifications

| | |
|----------------------|------------------------------------|
| Max. wheel diameter | 50mm |
| Collet chuck | 6.35mm (standard) |
| Input power | 760W |
| No load speed | 2,000 - 8,300 (min ⁻¹) |
| Weight | 1.8kg |
| Length | 406mm |
| Standard accessories | Side handle and 2 x wrench |

**BRUSH
LESS**
Brushless Motor

AC Brushless Motor Series

**Lighter.
Easier.
Safer.**



HiKOKI
HIGH PERFORMANCE POWER TOOLS



06 Polishing and Sanding

Quick Reference Guide for Sanding and Polishing

| Model | Type | Sheet / Pad Size (mm) | Input Power (W) | No Load Speed (min ⁻¹) | Dust Collection | Weight (kg) |
|--------------|-------------------|-----------------------|-----------------|------------------------------------|-----------------|-------------|
| SV12SG(H1Z) | Orbital Sander | 110 x 100 | 200 | 14,000 | • | 1.1 |
| FSV10SA(H1Z) | Orbital Sander | 92 x 184 | 160 | 10,000 | • | 1.3 |
| SV13YA(H1Z) | Random Orbital | 125 | 230 | 7,000 - 12,000 | • | 1.4 |
| SV15YC(H1Z) | Random Orbital | 150 | 350 | 4,200 - 11,000 | • | 2.5 |
| SB8V2(H1Z) | Belt Sander | 76 x 533 | 1,020 | 250 - 450 | • | 4.3 |
| SP18VA(H1Z) | Sander / Polisher | 180 | 1,250 | 0 - 600 / 0 - 3,400 | | 2.8 |

SV12SG(H1Z) ¼ Sheet Orbital Palm Sander



4966376279548

- Large soft grip for ease of use and allows motor ventilation
- Hook and loop base with additional clamps allows use of standard or hook and loop paper
- Excellent dust collection with standard dust bag
- Ideal for close edge work

Specifications

| | |
|-------------|-------------|
| Pad size | 110 x 100mm |
| Input power | 200W |



| | |
|----------------------|-----------------------------|
| No load speed | 14,000 (min ⁻¹) |
| Orbital diameter | 1.5mm |
| Weight | 1.1kg |
| Length | 137mm |
| Standard accessories | Sanding paper and dust bag |

FSV10SA(H1Z) ⅓ Sheet Orbital Sander



4966376298549

- Large soft grip for ease of use and allows motor ventilation
- Hook and loop base with additional clamps allows use of standard or hook and loop paper
- Excellent dust collection with standard dust bag
- Ideal for close edge work

Specifications

| | |
|-------------|------------|
| Pad size | 92 x 184mm |
| Input power | 160W |



| | | |
|----------------------|---|-----------------------------|
| No load speed | Spindle | 10,000 (min ⁻¹) |
| | Orbit | 20,000 (min ⁻¹) |
| Orbital diameter | 2mm | |
| Weight | 1.3kg | |
| Length | 184mm | |
| Standard accessories | Sanding paper, punch plate and dust bag | |

SV13YA(H1Z) 125mm Random Orbital Sander with Variable Speed



4966376279838

- Random orbit sanding action for smooth finishes
- Large soft grip for ease of use and allows motor ventilation
- Variable speed and stable speed control to suit multiple applications
- Hook and loop base
- Excellent dust collection with standard dust bag

Specifications

| | |
|---------------|-------------------------------------|
| Pad size | 125mm |
| Input power | 230W |
| No load speed | 7,000 - 12,000 (min ⁻¹) |



| | |
|----------------------|--|
| Orbital diameter | 3.2mm |
| Weight | 1.4kg |
| Length | 145mm |
| Standard accessories | Sanding paper, dust bag and carry case |

SV15YC(H1Z) 150mm Random Orbital Sander with Variable Speed



4966376280131

- Adjustable dual orbit diameter enables the orbit to be changed between 2.8mm and 6.2mm for greater sanding versatility
- TurboBoost switch
- Variable speed dial to suit multiple applications
- Hook and loop base
- Excellent dust collection with standard dust bag



Specifications

| | |
|------------------|-------------------------------------|
| Pad size | 150mm |
| Input power | 350W |
| No load speed | 4,200 - 11,000 (min ⁻¹) |
| Orbital diameter | 2.8mm / 6.2mm |

| | |
|----------------------|--|
| Weight | 2.5kg |
| Length | 173mm |
| Standard accessories | Front handle, sanding paper, dust bag and hex bar wrench |

SB8V2(H1Z) 76mm Belt Sander



4966376296736

- Variable speed dial to suit multiple applications
- Visible sanding position through transparent cover
- Suitable for close edge work due to design
- Excellent dust collection with standard dust bag



Specifications

| | |
|---------------|--------------------------------|
| Belt size | 76 x 533mm |
| Input power | 1,020W |
| No load speed | 250 - 450 (min ⁻¹) |
| Weight | 4.3kg |

| | |
|----------------------|---------------------------|
| Length | 318mm |
| Standard accessories | Sanding belt and dust bag |

SP18VA(H1Z) 180mm Sander Polisher



4966376279180

- Variable speed dial to suit multiple applications
- Soft start to prevent kickback upon start up
- Overload protection control to extend tool life



Specifications

| | |
|----------------|-------------------------------------|
| Wheel diameter | 180mm |
| Input power | 1,250W |
| No load speed | Low 0 - 600 (min ⁻¹) |
| | High 0 - 3,400 (min ⁻¹) |

| | |
|----------------------|---|
| Spindle thread | M14 x 2 |
| Weight | 1.3kg |
| Length | 415mm |
| Standard accessories | Loop handle, rubber pad, wool bonnet, sanding disc and wrench |



The MultiVolt series

**AC power.
DC freedom.**



A new generation battery system (BSL36A18), with almost the same size and weight as our 18V 5.0Ah/6.0Ah battery, but it's the technology inside that provides you with the great improvements you need. Doubling voltage provides the optimal power for the MultiVolt 36V tools, without the hassle of cords. The MultiVolt batteries are compatible with a wide range of 18V cordless tools, which means you can easily switch from one power tool to another. So you're just a simple click away from maximum performance.

HiKOKI
HIGH PERFORMANCE POWER TOOLS

07 Sawing



Quick Reference Guide for Circular Saws

| Model | Blade Diameter (mm) | Max. Cutting Depth (mm) | Input Power (W) | No Load Speed (min ⁻¹) | Dust Collection Capable | Base Material | Weight (kg) |
|------------|---------------------|-------------------------|-----------------|------------------------------------|-------------------------|---------------|-------------|
| C7MFA(H6Z) | 190 | 68 | 1,010 | 5,500 | • | Aluminium | 3.6 |
| C9SA3(H6Z) | 235 | 86 | 2,000 | 5,200 | • | Aluminium | 7.0 |

C7MFA(H6Z) 190mm Circular Saw



- Strong and lightweight for increased durability and user comfort
- Die-cast aluminium base for increased strength
- Takes both 185mm and 190mm blades for added versatility
- Includes 2 x TCT blades for added value

| Specifications | | |
|----------------------|------------------------------------|------|
| Capacity | Max. cut depth 90° | 68mm |
| | Max. cut depth 45° | 47mm |
| Input power | 1,010W | |
| No load speed | 5,500 (min ⁻¹) | |
| Blade diameter | 190mm & 185mm | |
| Blade bore | 20mm | |
| Weight | 3.6kg | |
| Length | 291mm | |
| Standard accessories | 2 x TCT blades, wrenches and guide | |



C9SA3(H6Z) 235mm Circular Saw



- Heavy-duty high speed motor for faster cutting
- Die-cast aluminium base for increased strength
- Integrated blower removes sawdust from the cutting line
- Low noise and vibration
- Includes 2 x TCT blades for added value

| Specifications | | |
|----------------------|---|------|
| Capacity | Max. cut depth 90° | 86mm |
| | Max. cut depth 45° | 65mm |
| Input power | 2,000W | |
| No load speed | 5,200 (min ⁻¹) | |
| Blade diameter | 235mm | |
| Blade bore | 25mm | |
| Weight | 7kg | |
| Length | 397mm | |
| Standard accessories | 2 x TCT blades, side handle, dust port, short lever, 6mm wrench and guide | |



C10FCE2(H1Z) 255mm Compound Mitre Saw

- Large 280mm base provides stable cutting
- Large fence height increases job stability and safety
- Electronic brake for increased user safety
- Positive mitre stops for quick and easy adjustment
- D handle for ergonomical cutting action
- Lightweight for easy transportation

**Specifications**

| | | |
|----------------------|--|------------------------|
| Capacity | Mitre angle | 0 - 52° left & right |
| | Bevel angle | 0 - 45° left |
| | Positive mitre angle stop | 0, 15, 22.5, 31.6, 45° |
| Input power | 1,520W | |
| No load speed | 5,000 (min ⁻¹) | |
| Blade diameter | 255mm | |
| Blade bore | 25.4mm | |
| Weight | 11.9kg | |
| Dimensions | 460 x 628 x 561mm | |
| Standard accessories | Blade, dust bag, vice assembly, 30mm washer and box wrench | |

Maximum Cutting Capacity for C10FCE2

| | |
|---|--------------|
| 0° (Right angle) | 59mm x 114mm |
| | 89mm x 101mm |
| Mitre right / left 45° | 59mm x 102mm |
| | 89mm x 70mm |
| Mitre right / left 52° | 59mm x 89mm |
| | 89mm x 54mm |
| Bevel left 45° | 41mm x 144mm |
| Mitre right / left 45° + Bevel left 45° | 41mm x 102mm |

**It's faster
and easier
with HiKOKI**

We take pride in our heritage.

70 years of Japanese technological knowledge, skills and experience is what we're most proud of. We develop products that will make even the toughest job as easy and comfortable as possible.



C10FSB(H1Z)

255mm Slide Compound Mitre Saw



4966376290659

- Poly v-belt and motor driving system for longer service life
- Soft start to reduce recoil force during motor start up
- Electronic constant speed control
- Positive mitre stops for quick and easy adjustment

Specifications

| | | |
|----------------------|--|------------------------------|
| Capacity | Mitre angle | 0 - 45° left & 0 - 57° right |
| | Bevel angle | 0 - 45° left & right |
| | Positive mitre angle stop | 0, 15, 22.5, 31.6, 45° |
| Input power | 1,450W | |
| No load speed | 3,800 (min ⁻¹) | |
| Blade diameter | 262mm | |
| Blade bore | 25.4mm | |
| Weight | 19.5kg | |
| Dimensions | 525 x 1050 x 615mm | |
| Standard accessories | Blade, dust bag, vice assembly, and wrench | |

Maximum Cutting Capacity for C10FSB

| | |
|--|--------------|
| 0° (Right angle) | 88mm x 312mm |
| | 91mm x 300mm |
| Mitre right / left 45° | 88mm x 218mm |
| | 91mm x 200mm |
| Mitre right 57° | 88mm x 165mm |
| | 91mm x 150mm |
| Bevel left 45° | 55mm x 305mm |
| | 60mm x 290mm |
| Bevel right 45° | 30mm x 305mm |
| | 35mm x 290mm |
| Mitre right / left 45° + Bevel left 45° | 55mm x 218mm |
| | 60mm x 200mm |
| Mitre right / left 45° + Bevel right 45° | 30mm x 218mm |
| | 35mm x 200mm |



C10RJ(H1Z) 254mm Table Saw



4966376334476

- Equipped extension support table to cut long material
- Folding stand and wheel for compact storage
- Soft start and electric brake (stops after 3 seconds after being switched off)
- Large rip moving range in its classes with a maximum cutting width of 889mm
- High power 15A motor for easier cutting of hard wood

Specifications

| | | |
|------------------------|---|-------|
| Specifications | | |
| Rated Input | 1500W | |
| Max. capacity | Cutting Depth (90°) | 79mm |
| | Cutting Depth (45°) | 57mm |
| | Rip fence ext. length (right) | 880mm |
| | Rip fence ext. length (left) | 440mm |
| | Width of Dado | 20mm |
| Blade Diameter | 254mm | |
| No Load Speed | 4,500 (min ⁻¹) | |
| Table Size (L x W) | 730 x 559mm | |
| Bevel Range | 0-45° | |
| Dimensions (L x W x H) | 920 x 770 x 600mm | |
| Weight | 44kg | |
| Standard accessories | 1 x TCT blade, push stick, wrenches, allen keys and guide | |

CC14SF(6WZ) 355mm Metal Cut-Off Saw



9323624028580

- One touch vice system for quick feeding and clamping
- Spindle lock for easy wheel change
- Sturdy aluminium housing
- Spark diversion guard
- Soft grip handle
- Cuts left and right at 45°

Specifications

| | | |
|----------------|-------------------|-------------|
| Wheel diameter | 355mm | |
| | Bar diameter | 65mm |
| | Pipe diameter | 120mm |
| Capacity | | 130 x 115mm |
| | Rectangular steel | 235 x 70mm |
| | | 195 x 100mm |
| Input power | 2,400W | |



| | |
|----------------------|----------------------------------|
| No load speed | 3,800 (min ⁻¹) |
| Weight | 16.5kg |
| Dimensions | 318 x 603 x 603mm |
| Standard accessories | 8mm hex key and 6 cut off wheels |

CJ90VST2(H1Z) 90mm Jig Saw



4966376333400

- 4-mode orbital action to suit multiple cutting applications
- Dust blower provides a clear view of the cutting line
- Trigger switch for smoother operation

Specifications

| | | |
|---------------------|--------------------------------|------|
| Capacity | Wood | 90mm |
| | Mild steel | 10mm |
| Min. cutting radius | 25mm | |
| Max. cutting angle | 45° (right and left) | |
| Input power | 705W | |
| No-load speed | 850-3,000 (min ⁻¹) | |



| | |
|------------------------|------------------|
| Stroke | 26mm |
| Length of cord | 2.5m |
| Dimensions (L x H x W) | 215 x 199 x 72mm |
| Weight | 2.2kg |

CN16SA(H1Z) 1.6mm Nibbler



4966376269907

- Lightweight and compact with a small grip circumference
- 3 position die holder for straight, right and left cutting
- Lockable slide switch for user comfort
- Punch and die service life: 300m of cutting into 1.6mm steel

Specifications


| | | |
|----------------------|----------------------------|-------------|
| Capacity | Mild steel | 75mm |
| | Stainless | 130mm |
| | Aluminium | 110 x 110mm |
| Input power | 400W | |
| No load speed | 2,300 (min ⁻¹) | |
| Weight | 1.6kg | |
| Length | 250mm | |
| Standard accessories | 2 x hex bar wrench | |



Recommended Service Life of Punch and Die for CN16SA

| Test Condition | Service Life |
|--|--------------|
| 1.6mm Mild Steel Plate | 300m |
| 1.6mm Mild Steel Plate (Corrugated or trapezoidal shape) | 50m |
| 1.2mm Stainless Steel Plate | 200m |

08 Planing and Routing

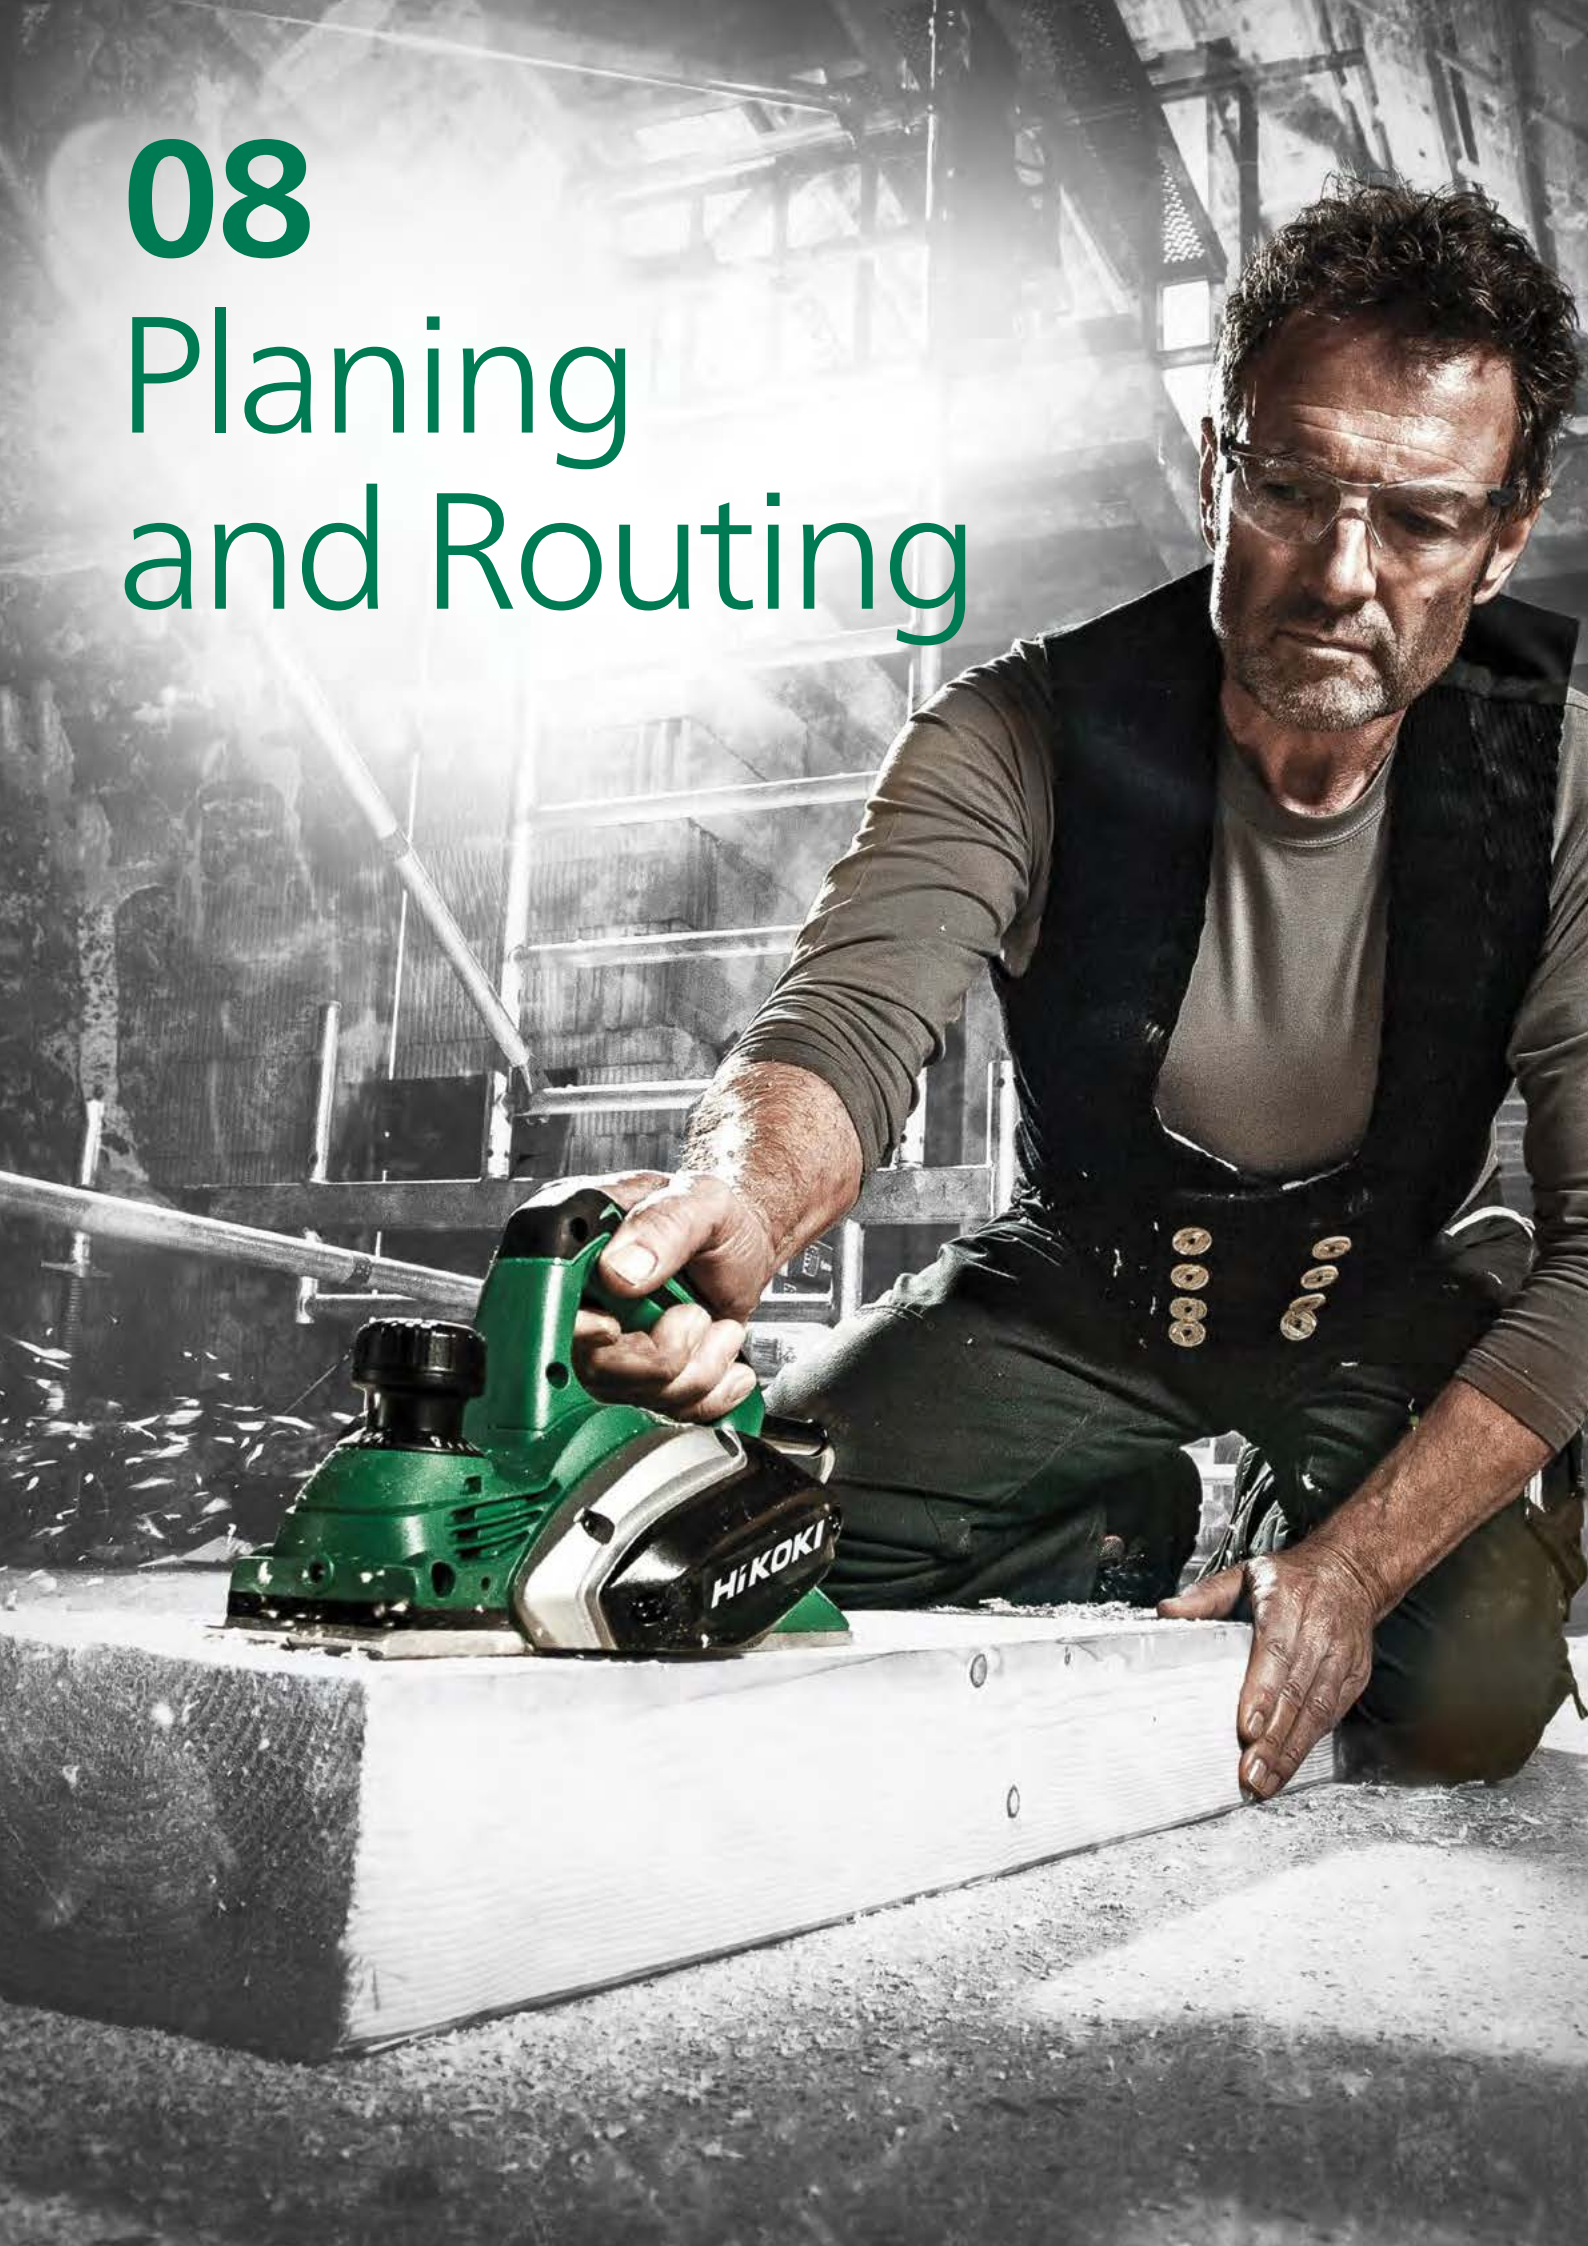

High Performance Power Tools.

Our brand name is new, but our company isn't. We've been developing innovative technologies for over 70 years. We are proud of our achievements and our contribution to the Australian woodworking industry.



Planing and Routing

P20ST(H1Z) 82mm Rebate Planer



4966376296248

- Lightweight and compact
- Maximum rebating depth of 9mm
- Able to be connected to dust extraction equipment

Specifications

| | |
|----------------------|---|
| Input power | 580W |
| No load speed | 17,000 (min ⁻¹) |
| Blade type | 82mm |
| Max. cutting width | 82mm |
| Max. cutting depth | 1.5mm |
| Weight | 2.5kg |
| Length | 296mm |
| Standard accessories | Blades, blade setting gauge, guide and wrench |

09

Heat Gun



RH600T(H1Z) Heat Gun



- Two position switch controls high/low air volume and temperature controls
- Convenient quick cooling button delivers a shot of cool air for cooling down materials
- Built in thermal cut-out protects the tool from damage due to overheating



| Specifications | | |
|----------------------|--|-----------|
| Input power | 2,000W | |
| Air volume | Low | 250 l/min |
| | High | 500 l/min |
| Air temperature | Low | 450°C |
| | High | 600°C |
| Quick cooling button | Yes - 50°C | |
| Weight | 0.57kg | |
| Dimensions | 245 x 83 x 250mm | |
| Standard accessories | Round nozzle, flat nozzle, curved surface nozzle, glass protector nozzle, scraper with grip and carry case | |


RH650V(H1Z) Heat Gun with LCD Display



- Variable temperature and air flow buttons allow precise settings
- LCD display indicates temperature and air volume settings
- Built in thermal cut-out protects the tool from damage due to overheating



| Specifications | | |
|----------------------|--|----------------|
| Input power | 2,000W | |
| Air volume | Low | 250 - 500l/min |
| | High | 250 - 500l/min |
| Air temperature | Low | 50°C |
| | High | 50 - 650°C |
| LCD display | Yes | |
| Weight | 0.79kg | |
| Dimensions | 245 x 85 x 254mm | |
| Standard accessories | Round nozzle, flat nozzle, curved surface nozzle, glass protector nozzle, scraper with grip and carry case | |

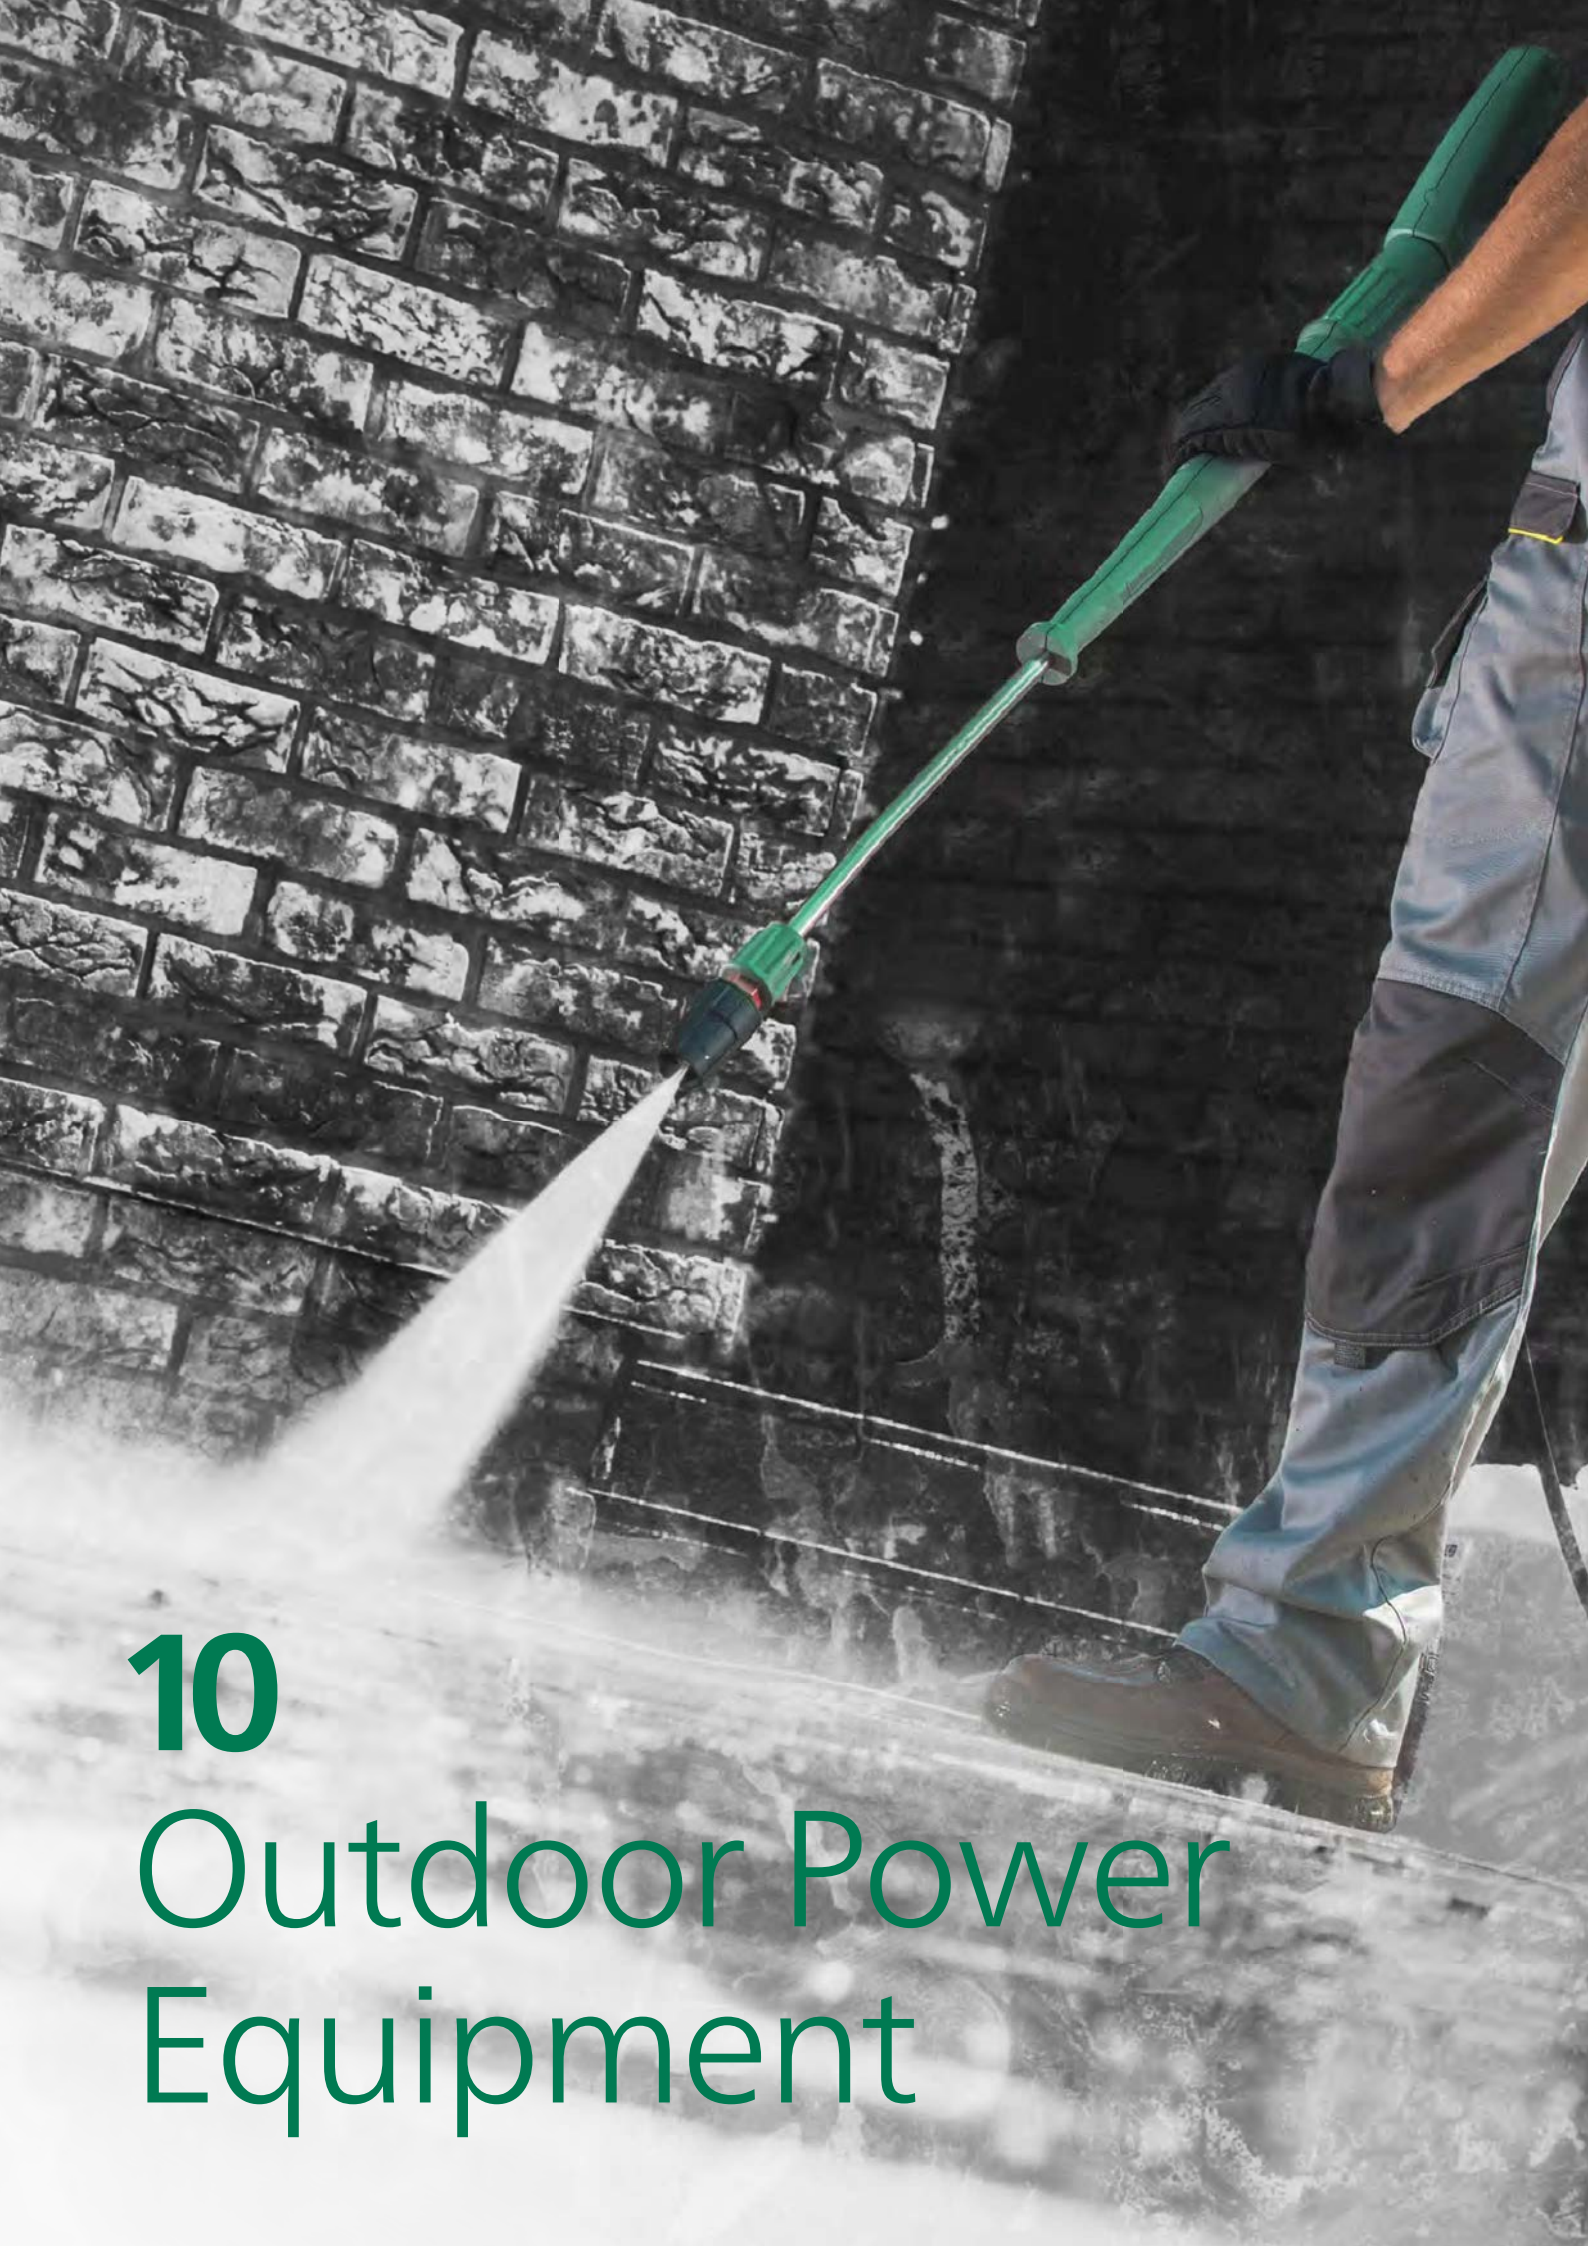

10 Outdoor Power Equipment

AW130(H1Z) 1,885psi High Pressure Washer



- Automatic start/stop reduces motor & pump wear
- Durable corrosion free metal pump
- Built in thermal protector stops the motor when abnormal heat is detected
- Siphon function can draw water from a bucket
- Handle & wheels for easy transportation & manoeuvrability

| Specifications | |
|---------------------------|---|
| Max. pressure | 1,885psi / 130bar |
| Flow rate | 6L/min |
| High pressure hose length | 10m |
| Permissible water temp. | 40°C or less |
| Input power | 1,600W |
| Power cord length | 5m |
| Weight | 8.3kg |
| Standard accessories | Trigger gun, high pressure hose (10m), variable nozzle spray lance, turbo nozzle spray lance, detergent bottle with nozzle, one touch hose connector joint, water feed connector, nozzle cleaning pin, cord holder, trigger gun holder and top handle |



AW150(H1Z) 2,175psi High Pressure Washer



- Automatic start/stop reduces motor & pump wear
- Durable corrosion free metal pump
- Built in thermal protector stops the motor when abnormal heat is detected
- Siphon function can draw water from a bucket
- Integrated hose reel with winder
- Handle & wheels for easy transportation & manoeuvrability

| Specifications | |
|---------------------------|---|
| Max. pressure | 2,175psi / 150bar |
| Flow rate | 6L/min |
| High pressure hose length | 10m |
| Permissible water temp. | 40°C or less |
| Input power | 2,000W |
| Power cord length | 5m |
| Weight | 12.4kg |
| Standard accessories | Trigger gun, high pressure hose (10m), variable nozzle spray lance with pressure adjuster, turbo nozzle spray lance, on board detergent bottle, one touch hose connector joint, water feed connector, nozzle cleaning pin, trigger gun holder, hose winder handle and trigger gun support |



Outdoor
Power Tools



11 Cleaning

RP250YDL(H1Z) 25L Wet & Dry Vacuum



- Auto power function allows the vacuum unit power to turn on and off when tool is in use
- Equipped with Class L filter capable of collecting over 99% of dust from 0.2 to 2-µm
- PressClean system allows the filter surface to be cleaned at the press of a button to optimise suction
- Built in overload protection
- Includes both PE and fleece filters

| Specifications | | |
|----------------------|---|-----|
| Tank Capacity | 25L | |
| Suction capacity | Solid | 21L |
| | Liquid | 18L |
| Input power | 1,000W | |
| Auto outlet | 1,400W | |
| Filtration rating | Class L | |
| Max. vacuum pressure | 21kPa | |
| Max. air flow | 3.6 (m³/min) | |
| Hose (ID x length) | 32mm x 3.5m | |
| Weight | 7.8kg | |
| Dimensions | 374 x 392 x 550mm | |
| Standard accessories | 3.5m suction hose, 2 x pipes, floor nozzle set, crevice nozzle, suction nozzle, round brush nozzle, adaptor, pipe holder, PE filter bag, fleece filter bag and hook | |



RP300YDL(H1Z) 30L Wet & Dry Vacuum



- Stainless steel canister for increased durability
- Auto power function allows the vacuum unit power to turn on and off when tool is in use
- Equipped with Class L filter capable of collecting over 99% of dust from 0.2 to 2-µm
- PressClean system allows the filter surface to be cleaned at the press of a button to optimise suction
- Built in overload protection
- Includes both PE and fleece filters

| Specifications | | |
|----------------------|---|-----|
| Tank Capacity | 30L | |
| Suction capacity | Solid | 26L |
| | Liquid | 23L |
| Input power | 1,000W | |
| Auto outlet | 1,400W | |
| Filtration rating | Class L | |
| Max. vacuum pressure | 21kPa | |
| Max. air flow | 3.6 (m³/min) | |
| Hose (ID x length) | 32mm x 3.5m | |
| Weight | 9.2kg | |
| Dimensions | 391 x 398 x 658mm | |
| Standard accessories | 3.5m suction hose, 2 x pipes, floor nozzle set, crevice nozzle, suction nozzle, round brush nozzle, adaptor, pipe holder, PE filter bag, fleece filter bag and hook | |



11 Accessories



102 Piece Drill and Driver Bit Set



| Description | Product Code | Barcode |
|---|--------------|---------------|
| Suitable accessories for metal, wood, plastic and masonry applications. | | |
| Set includes: | | |
| <ul style="list-style-type: none"> • Magnetic insert bit holder: 60mm length, 1/4 hex, zinc chrome plated steel • 12.7mm countersink: 1/4" hex • Drill bits: HSS black oxide: 1mm (5), 1.5mm (5), 2mm (4), 3mm, 3.5mm, 4mm, 4.5mm, 5mm, 6mm • Masonry bits: carbide tip – 3mm, 4mm, 5mm, 6mm • 50mm insert bits: 1/4" hex – PH1, PH2, PH3, PZ 1, PZ 2, PZ 3, TX 20, TX 25 • 25mm insert bits: 1/4" hex – PH0 (3), PH1 (4), PH2 (8), PH3 (4), PZ 1 (3), PZ 2 (5), PZ 3 (3), 3 slot (3), 4 slot (3), 5 slot (4), 6 slot (4), # 1 sq, # 2 sq, # 3 sq, TX 10 (2), T15 torx (2), TX 20 (2), TX 25 (2), TX 27 (2), TX 30 (2), TX 40 (2), 1.5 hex, 2 hex, 2.5 hex, 3 hex, 4 hex, 5 hex, 6 hex • Labelled accessory slots for convenient accessory location • Hard plastic case for safe and easy storage | 728492 | 9323624021901 |

Accessories For Screw Drivers



| Part No. | Description | Barcode | For Model |
|----------|---------------------------------|---------------|--------------|
| 752398 | Magnetic Bit Holder (41L) | 8717472814098 | W6VB3, W8VB2 |
| 985322 | 5/16" Magnetic Hex Socket | 4966375115793 | W6VB3, W8VB2 |
| 317671 | Sublocator for 5/16" Hex Socket | 4966375287308 | W6VB3, W8VB2 |

Rotary and Demolition

SDS Plus



| Description | Size | Item Number | Barcode | Suits |
|-----------------------------|--|-------------|---------------|--|
| 5 Piece SDS Plus Drill Set: | Set includes: • 5mm x 160mm • 6mm x 160mm • 8mm x 160mm • 10mm x 160mm • 12mm x 160mm | 782531 | 8717574047172 | Suitable for HiKOKI / Hitachi light weight rotary hammers including the DH36DPA/DH-36DPC/DH18DBL/DH18DSL/DH26PC/DH28PC/DH36DAL and other brands. |
| Bull Point | 250mm | 751590 | 8717472815330 | |
| Cold Chisel | 20 x 250mm | 751591 | 8717472815347 | |

SDS Max



| | | | | |
|-------------|------------|--------|---------------|---|
| Bull Point | 280mm | 750990 | 871754653120 | Suitable for HiKOKI / Hitachi hammers including the DH36DMA/DH40MC/DH40MEY/DH-45MEY/DH52MEY/H45MEY/H60MEY and other brands. |
| Bull Point | 400mm | 750991 | 871754653144 | |
| Cold Chisel | 27 x 280mm | 750993 | 8717154653137 | |
| Cold Chisel | 27 x 400mm | 750994 | 8717154653151 | |

Demolition Bits

28mm Hexagon with Collar




| Description | Size | Item Number | Barcode | Suits |
|-------------|------------|-------------|---------------|--|
| Bull Point | 550MM | 751571 | 8717472818539 | Suitable for HiKOKI / Hitachi hammer H90SB/H90SG and other brands. |
| Cold Chisel | 35 x 550MM | 751572 | 8717472818546 | |

30mm Hexagon with Collar



| | | | | |
|-------------|-------------|--------|---------------|--|
| Bull Point | 410mm | 401036 | 4549115002043 | Suitable for HiKOKI / Hitachi hammer H65SB/H65SB2/H65SB3 and other brands. |
| Cold Chisel | 35 x 410mm | 401990 | 4549115045293 | |
| Wide Chisel | 75 x 450mm | 751545 | 8717472818522 | |
| Spade | 135 x 450mm | 751542 | 8717154653670 | |



Hammer Grease



| Part No. | Description | Size | Barcode | Suitable Models | |
|----------|------------------------|------|---------------|---------------------------|---------------------------|
| 981840 | Crank mechanism grease | 30g | 4966375124375 | H25PV | H60MEY |
| 308471 | Crank mechanism grease | 70g | 4966375124368 | H41MB H41SC H45MR | H60MRV H70SA H65SB2 |
| 980927 | Crank mechanism grease | 500g | 4966375112747 | H45MRY H45ME H45MEY | H65SB3 H90SB H90SG |
| 714833 | Gear grease | 100g | 8717574028515 | | |

Grinding

Diamond Wheels



| Description | Diameter (mm) | Bore (mm) | Segment Height (mm) | Product Code | Barcode |
|-----------------|---------------|-----------|---------------------|--------------|---------------|
| 3 Pack Assorted | 105 | 20 / 16 | 6 - 7 | 797130 | 9323624015092 |
| 3 Pack Assorted | 125 | 22.2 | 7 | 797230 | 9323624028412 |

Rubber Pads



| Part No. (Pad) | Part No. (Nut) | Pad Size | Thread | Barcode |
|----------------|----------------|----------|-----------|---------------|
| 936558Z | 935513 | 100mm | M10 x 1.5 | 4966375446521 |
| 753806 | 937826Z | 115mm | M14 x 2 | 4966375447269 |
| 953247Z | 953246Z | 180mm | M14 x 2 | 4966375869653 |


Easy Bevel for 125mm Grinder




| Description | Product Code | Barcode | For Model |
|-----------------------------------|--------------|---------------|---|
| 125mm Easy Bevel Kit | 797006 | 9323624007196 | G13SB3 / G13SE2 / G13YC2 / G13SW / G13SQ / G13VA |
| 125mm Zec Disc to suit Easy Bevel | 797019 | 9232624007295 | |

Accessories


Wheel Washers

|  | Part No. | Diameter | For Model | Barcode |
|---|----------|----------|--|---------------|
| | 372737 | 30mm | G10SD2 / G10SQ / G10SN / G10SR3 / G10SR4 | 4966375309512 |
| | 937817Z | 42mm | G12SE2 / G12SR3 / G13SN / G13SR3 / G13SE2 / G13SB3 / G13SR3 / G13YF / G13YA / G12SE2 / G13SE2 / G13SQ / G13YC2 / G18DBAL / G18DSL / G13SW / G12SR4 / G13SR4 / G13SS2 / G13VE | 4966375447252 |
| | 937907Z | 42mm | G18UBY / G23UB2 / G23UBY / G23ST / G18UDY / G23UDY | 4966375447481 |
| | 937908Z | 90mm | G18SE3 / G23SS / G23SE2 / G23UB2 / G18UDY / G23UDY | 4966375447498 |


Wheel Nuts

|  | Part No. | Diameter | Thread Size | For Model | Barcode |
|---|----------|----------|-----------------|---|---------------|
| | 339578 | 30mm | Outer M10 x 1.5 | G10SQ / G10SR3 / G10SD2 / G10SN / G10SR4 | 4549115112247 |
| | 339579 | 45mm | Outer M14 x 2 | G12SR4 / G13SR4 / G13SS2 / G13VE / G18DBAL / G12SR3 / G13SR3 / G13SB3 / G13YF / G13YA / G12SE2 / G13SE2 / G13SQ / G13YC2 / G18DSL / G13SW | 4549115112254 |
| | 372702 | 40mm | Outer M14 x 2 | G13BY | 4549115171497 |
| | 373779 | 50mm | Outer M14 x 2 | G13SC2 / G18SE3 / G23SE2 / G18UBY / G23UB2 / G23UBY / G23ST / G18UDY / G23UDY | 4966375447504 |
| | 937917Z | 90mm | Outer M14 x 2 | G23SS / G18UDY / G23UDY | 4966375447542 |

Safety Guards

|  | Part No. | Type | For Model | Barcode |
|---|----------|---------------|--|---------------|
| | 331076 | Standard | G10SN | 4966375713302 |
| | 301948 | Standard | G10SR3 / G10SQ | 4966375173144 |
| | 370066 | Standard | G10SR4 | 4549115102293 |
| | 315492 | Standard | G12SR3 | 4966375270201 |
| | 311745 | Quick Release | G12SE2 | 4966375240679 |
| | 338848 | Standard | G12SR4 | 4549115099180 |
| | 319116 | Standard | G13SR3 / G18DSL | 4966375298588 |
| | 333840 | Quick Release | G18DBAL | 4966375884354 |
| | 320192 | Standard | G13SB3 | 4966375307051 |
| | 311742 | Quick Release | G13VA / G13YF / G13SE2 / G13SB3 / G13YC2 / G13SW | 4966375240648 |
| | 372915 | | G13BY | 4549115171565 |
| | 331766 | Standard | G13SQ | 4966375830382 |
| | 370411 | Standard | G13SC2 | 4966375307242 |
| | 338845 | Standard | G13SR4 / G13SS2 | 4549115099159 |
| | 321543 | Quick Release | G18SE3 / G18UBY / G18UDY | 4966375316961 |
| | 330036 | Standard | G23SS | 4966375693482 |
| | 321547 | Quick Release | G23SE2 / G23UB2 / G23UBY / G23UDY | 4966375317005 |
| | 338292 | Standard | G23ST | 4549115093379 |

Dust Collectors

|  | Part No. | Type | For Model | Barcode |
|---|----------|----------------|-------------------------|---------------|
| | 323918 | Dust Collector | G10SD2 / G10SR3 / G10SN | 4966375602688 |
| | 338497 | Dust Collector | G18DBAL | 4549115106918 |

Cutting Guard Clip



| Part No. | Type | For Model | Barcode |
|----------|--------------------|-----------|---------------|
| 372701 | Cutting Guard Clip | G13BY | 4549115171947 |

Spanners and Wrenches







| Part No. | Type | For Model | Barcode |
|----------|--------------------------|--|---------------|
| 313933 | Pin Spanner | G10SQ / G10SR3 / G10SD2 / G13SQ / G10SN / G10SR4 / G12SR4 / | 4966375123354 |
| 711271 | Pin Spanner | G12SE2 / G12SR3 / G13SR3 / G13YF / G13YA / G13YC2 / G13SB3 / G13SE2 / G13SW / G10SR4 / G12SR4 / G13SR4 / G18DBAL / G18DSL / G13SS2 / G13VE | 4966375448112 |
| 325491 | Pin Spanner | G13SC2 / G18SE3 / G23SE2 / G18UBY / G23SS / G23UB2 / G23UBY / G23ST / G18UDY / G23UDY | 4966375639688 |
| 931161 | Wrench 17mm and 19mm (C) | GP13 | 4966375439257 |
| 951211 | Wrench 17mm | CC16SA | 4966375128175 |
| 948163 | Wrench 19mm and 21mm | CC16SB | 4966375456254 |
| 955857 | Hex Bar | CC14SF | 4966375472117 |
| 936553 | Wrench 12mm | | 4966375127529 |
| 936638 | Wrench 17mm | | 4966375128144 |
| 332812 | 6mm Collet Chuck | GP2 / GP2S2 / GP3V / GP5V | 4966375863007 |
| 331422 | 1/4" Collet Chuck | | 4966375721772 |
| 985136 | 1/8" Collet Chuck | | 4966375543763 |

Side Handles




| Part No. | Type | For Model | Barcode |
|----------|-------------------------------|---|---------------|
| 302142 | Standard | G10SQ / G10SD2 / G13SQ / G10SN / G10SR4 / G12SR4 / G13SR4 / G13SS2 | 4966375174554 |
| 318312 | Standard | G10SR3 / G12SR3 / G13SR3 / G18DSL | 4966375292777 |
| 994322 | Standard | G12SE2 / G13SC2 / G13SE2 / G13SB3 | 4966375137009 |
| 937981 | Standard | G18SE3 / G23SS / G23SE2 / G23UB2 / G23ST | 4966375447740 |
| 336865 | Anti-Vibration (Black & Grey) | G13SB3 / G13SE2 / G13SR3 / G13YF / G13VA / G13YC2 / G13SW / G18DBAL / G13VE / G13BY | 4549115066359 |
| 336864 | Anti-Vibration (Black & Grey) | G18SE3 / G18UBY / G23SE2 / G23UB2 / G23UBY / G18SE3 / G18UBY / G23SE2 / G23UB2 / G23UBY / G18UDY / G23UDY | 4549115066472 |

Sander & Polisher Attachments


| | Part No. | Description | Diameter (mm) | Comments | For Model | Barcode |
|--|--------------------|-------------|---------------|-------------|------------------|---------------|
|  | 953247Z | Rubber Pad | 180 | Rigid | SAT180 SP18VA | 4966375468653 |
|  | 949103 + 753822 | Wool Bonnet | 180 | - | SAT180 SP18VA | 4966375107057 |
|  | 753817 | Backing Pad | 150 | Hook & Loop | SAY150A | 8717574033823 |
| | 376692 | Backing Pad | 125 | Hook & Loop | SV13YA SV13YB | 4549115236905 |
|  | 753852 | Backing Pad | 150 | Hook & Loop | SV15YC | 4549115159198 |

Dust Bags


| | Part No. | For Model | Barcode |
|---|----------|---|---------------|
|  | 310339 | FSV10SA / SV12SH / SV12SG / SV13Y B / SV13YA | 4966375229445 |
| | 300177 | SV12SD | 4966375165149 |
| | 323011 | SB8V2 / SB10V2 | 4966375328575 |
| | 371871 | SV15YC | 4549115159228 |

Sawing & Cutting

Timber Saw Blades

| | Diameter (mm) | Bore (mm) | No. of Teeth | Product Code | Barcode | For Model |
|---|---------------|-----------|--------------|--------------|----------------|---------------------|
|  | 125 | 20 | 40 | 402527 | 45499115076716 | C18DBL |
| | 165 | 20 | 24 | 338935 | 4549115107373 | C18DBAL / C18DSL |
| | 235 | 25 | 20 | 401935 | 4549115036925 | C9SA3 |

Metal Cutting Wheels

| | Diameter (mm) | Thickness (mm) | Bore (mm) | Product Code | Barcode | Pack Qty |
|---|---------------|----------------|-----------|--------------|---------------|----------|
|  | 335 | 3 | 25.4 | CW355 | 9377778040509 | 5 |

Jig Saw Blade Set



| Description | Product Code | Barcode |
|---|--------------|---------------|
| 10 piece set includes: • 2 x HCS Wood 100 x 8 TPI - J W20 • 2 x HCS Wood 100 x 6 TPI - J W40 • 1 x HCS Wood 76 x 18 TPI - J W10C • 2 x HCS Wood 100 x 10 TPI - J W10 • 1 x HCS Wood 100 x 10 TPI (reverse rake) - J W10R • 2 x HSS Metal 91 x 19 TPI - J M1 | 750049 | 8717154659177 |

Reciprocating Saw Blade Set



| Description | Product Code | Barcode |
|--|------------------|---------------|
| 13 piece set includes: • 3 pcs. BIM - 6"/152mm x 6 TPI • 2 pcs. BIM - 6"/152mm x 18 TPI • 3 pcs. BIM - 8"/203mm x 14 TPI • 3 pcs. BIM - 9"/230mm x 6 TPI • 1 pc. BIM - 9"/230mm x 10 TPI • 1 pc. Storage Pouch | 752049 402153 | 8717574004557 |

Planer Blades



| Description | Length (mm) | Product Code | Barcode |
|---|-------------|--------------|---------------|
| 2 x Reversible TCT Blades | 82 | 750470 | 8717472818812 |
| 10 x Reversible TCT Blades | 82 | 750471 | 8717472818829 |
| 2 x HSS planer blades (for P20SB HSS model only) | 82 | 750473 | 8717472818843 |
| 1 x HSS blade (22mm wide for P13F) | 330 | 328935 | 9323624015917 |
| 1 x HSS blade (12mm narrow for P13F) | 330 | 726341 | 9323624004386 |

Wheel Washers



| Part No. | Diameter | Bore Size | For Model | Barcode |
|----------|----------|-----------|-----------|---------------|
| 312323 | 100mm | 25.4mm | CM12Y | 4966375245223 |

Wheel Nuts



| Part No. | Diameter | For Model | Barcode |
|----------|----------|-----------|---------------|
| 312324 | 100mm | CM12Y | 4966375245230 |


Spanners and Wrenches



| Part No. | Type | For Model | Barcode |
|----------|--------------------------|---|---------------|
| 931161 | Wrench 17mm and 19mm (C) | GP13 | 4966375439257 |
| 951211 | Wrench 17mm | CC16SA | 4966375128175 |
| 948163 | Wrench 19mm and 21mm | CC16SB | 4966375456254 |
| 955857 | Hex Bar | CC14SF | 4966375472117 |
| 940543 | Box Wrench 10mm | C18DL / C18DSL / C6MFA / C7MFA / C7UY / C6MEY | 4966375127963 |
| 990666 | Hex Bar 2.5mm | C18DBL / C18DBAL / C6MEY | 4966375559900 |
| 944458 | Hex Bar 4mm | C18DBL | 4966375453895 |
| 944459 | Hex Bar 5mm | C18DBAL | 4966375453901 |
| 957683 | Wrench 10mm & 13mm | C7SB / C7SB2 / C8 / C7YA | 4966375477020 |
| 872422 | Hex Bar 6mm | C7UR / C9SA2 / C9BA2 / C9SA3 | 4966375404033 |
| 944459 | Hex Bar Wrench 5mm | C6SS | 4966375453901 |

Accessories

Flanges



| Part No. | Type | For Model | Barcode |
|----------|-------|----------------------|---------------|
| 317465 | Inner | C18DL / C18DSL | 4966375285403 |
| 324563 | Outer | | 4966375621188 |
| 338915 | Inner | C18DBAL / C6MEY | 4549115101388 |
| 338916 | Outer | | 4549115101395 |
| 333666 | Inner | C18DBL | 4966375880448 |
| 333665 | Outer | | 4966375880431 |
| 302444 | Inner | C7YA | 4966375176527 |
| 302423 | Outer | | 4966375176329 |
| 321639 | Inner | C7SB2 / C7UR | 4966375317784 |
| 320953 | Outer | | 4966375312604 |
| 322099 | Inner | C6SS / C6MFA / C7MFA | 4966375321415 |
| 323924 | Outer | | 4966375602729 |
| 303365 | Inner | C9SA2 / C9BA2 | 4966375182757 |
| 302423 | Outer | | 4966375176329 |
| 370273 | Inner | C9SA3 | 4549115127951 |
| 370279 | Outer | | 4549115128019 |
| 330985 | Inner | C7UY | 4966375710516 |
| 330986 | Outer | | 4966375710523 |

Guides



| Part No. | For Model | Barcode |
|----------|--|---------------|
| 302756 | C6SS / C6MFA / C7MFA / C18DL / C18DBL / C18DBL / C18DSL / C7UY / C6MEY | 4966375178651 |
| 962175 | C18DBAL | 4966375485629 |
| 302691 | C7SB / C7SB2 / C7YA / C7UR | 4966375116448 |
| 303888 | C9SA2 / C9BA2 / C9SA3 | 4966375186366 |

Side Handles



| Part No. | For Model | Barcode |
|----------|-----------------------|---------------|
| 303811 | C9SA2 / C9BA2 / C9SA3 | 4966375185826 |
| 338934 | C18DBAL | 4549115101562 |

Dust Extractor Adaptors



| Part No. | For Model | Barcode |
|----------|----------------------|---------------|
| 324580 | C18DL / C18DSL | 4966375621348 |
| 302981 | C6SS / C6MFA / C7MFA | 4966375180319 |
| 329063 | C18DBL | 4966375679929 |
| 339383 | C18DBAL / C6MEY | 4966375681694 |
| 302690 | C7SB | 4966375178170 |
| 324669 | C9SA2 / C9BA2 | 4966375628361 |
| 319297 | C7YA | 4966375300076 |
| 372757 | C7UR | 4549115164963 |
| 997247 | C7UY / C9SA3 | 4966375579076 |
| 337936 | CV350V | 4549115088436 |

Dust Bags



| Part No. | For Model | Barcode |
|----------|---|---------------|
| 961523 | C7YA | 4966375484363 |
| 998845 | C10FSB / C10FSH | 4902530120110 |
| 322955 | C8FSE / C8FSHE / C10FCE2 / C10FCH2 / C12LCH / C12LSH / C12RSH / C12RSH2 | 4966375328087 |

Vice Assembly



| Part No. | For Model | Barcode |
|----------|-------------------|---------------|
| 322952 | C10FCE2 / C10FCH2 | 4966375328063 |
| 324378 | C12LSH / C12RSH | 4966375619185 |
| 329860 | C8FSE / C8FSHE | 4966375687351 |
| 321370 | C10FSB / C10FSH | 4966375316176 |
| 339624 | C12RSH2 | 4549115112711 |

Extension Guide Assembly



| Part No. | For Model | Barcode |
|----------|-------------------------------------|---------------|
| 321553 | C8FSE / C8FSHE / C10FSB / C10FSH | 4966375317067 |
| 322956 | C10FCE2 / C10FCH2 | 4966375328094 |
| 324369 | C12LSH / C12RSH / C12RSH2 | 4966375621669 |

Site Bags



| Description | Product Code | Barcode |
|----------------|--------------|---------------|
| Large Site Bag | 402094 | 4549115048966 |



| | | |
|---|--------|---------------|
| Premium Site Bag with Extension Handle & Wheels | 402096 | 4549115048980 |
|---|--------|---------------|

Stackable Cases

402538 Case I Accessory Organiser

295 x 395 x 105mm



4549115077508



402541 Case IV

295 x 395 x 315mm



4549115077539



402545 Case II

295 x 395 x 158mm



4549115077577



402542 3 x Accessory Case Dividers

(To Suit Case I) 213 x 106 x 63mm



4549115077546



402546 Case III

295 x 395 x 210mm



4549115077584



402543 Caster Wheels

372 x 526 x 140mm










4549115077553



Stackable Cases Inserts

| Insert Number | Barcode | Insert To Suit (Tool) | Tool Description | Insert To Suit Stackable case |
|---------------|---------------|-----------------------|--|-------------------------------|
| 373223 | 4549115181052 | WR36DA / WR36DB | MultiVolt Impact Wrenches | Stackable Case III |
| 373070 | 4549115174467 | G3613DA / G3613DB | MultiVolt Angle Grinders | Stackable Case II |
| 373646 | 4549115187139 | C3607DA | MultiVolt Circular Saw | Stackable Case IV |
| 373135 | 4549115175563 | DH36DPC | MultiVolt Rotary Hammer | Stackable Case IV |
| 339368 | 4549115112636 | Twin Tools Insert | Impact Driver Drills/ Driver Drills/ Impact Drivers/ Impact Wrenches | Stackable Case III |
| 336475 | 4549115055056 | Single Tool Insert | Impact Driver Drills/ Driver Drills/ Impact Drivers/ Impact Wrenches | Stackable Case II |
| 339219 | 4549115106437 | C18DBAL | Circular Saw | Stackable Case IV |
| 337529 | 4549115079540 | C18DSL | Circular Saw | Stackable Case IV |
| 337937 | 4549115090927 | CV18DBL | Multi Tool | Stackable Case II & III |
| 337114 | 4549115072954 | DH18DSL | Rotary Hammer | Stackable Case II |
| 337288 | 4549115075214 | DN18DSL | Angle Drill | Stackable Case III |
| 338872 | 4549115099494 | G18DBAL | Angle Grinder | Stackable Case II |
| 337113 | 4549115072947 | G18DSL | Angle Grinder | Stackable Case II |
| 337742 | 4549115083967 | P18DSL | Planer | Stackable Case III |
| 337112 | 4549115072930 | WF18DSL | Screw Driver | Stackable Case III |
| 337109 | 4549115072909 | WR18DSHL | Impact Wrench | Stackable Case III |
| 370331 | 4549115128545 | DH18DBL / DH18DBQL | Rotary Hammers | Stackable Case IV |
| 375224 | 4549115213081 | NR1890DBCL | Framing Nailer | Stackable Case IV |

High Pressure Washer Accessories

| | Part No. | Description | For Model | Barcode |
|---|----------|----------------------------------|-----------------------|---------------|
|  | 335651 | Wash Brush | AW100 / AW130 / AW150 | 4549115035584 |
|  | 335652 | Rotating Brush | AW100 / AW130 / AW150 | 4549115035591 |
|  | 335657 | 10m High Pressure Extension Hose | AW100 / AW130 / AW150 | 4549115035621 |
|  | 336412 | Patio Cleaner | AW100 / AW130 / AW150 | 4549115057869 |
|  | 336413 | Rotary Angle Nozzle | AW100 / AW130 / AW150 | 4549115057876 |
|  | 336414 | Angle Nozzle 315 Degree | AW100 / AW130 / AW150 | 4549115057883 |
|  | 335817 | Strainer Hose Set | AW130 / AW150 | 4549115039650 |

Accessories

Vacuum Accessories

| Dust Extractor Dust Bag (5 Pcs) | Hose 32mm I.D. Standard Accessory | Joint Optional Accessory | Dust Collection Adaptor Optional Accessory | Applicable Power Tool |
|--|---|--|--|---|
| RP250YDL  |  | | Part No. 339729  | Rotary hammers  |
| | | | Part No. 783121  | Demolition hammers  |
| | | | Part No. 783104  | Disc grinders  |
| | | | Part No. 783102, 783103  | |
| | | Part No. 963558  | Part No. 328740  | |
| RP300YDL  | | Part No. 337527  | Part No. 339382  | Orbital Sanders  |
| | | | | Belt Sanders  |
| | | | Part No. 339380  | Routers  |
| | | | Part No. 339381  | |
| | | | Part No. 324669  | Circular Saws  |
| | | | Coming Soon  | Jig Saws  |
| | | Part No. 963558  | Part No. 334502  | Planers  |
| | | | Part No. 317279  | |
| | | | Part No. 339236  | Orbital Sanders  |
| | | | Part No. 339237  | Slide Compound Mitre Saws  |

| MODEL | MOTOR | ARMATURE | MAGNET | SWITCH | BRUSHES |
|------------|--------|--------------|--------------------------------|--------|---------|
| AW18DBL | | 337312 | 337310 Wiring Ass'y | | |
| C18DBAL | | 361010 Rotor | 340911 Wiring Ass'y | 338900 | |
| C18DBL | | 336547 Rotor | 340872 Wiring Ass'y Inc Switch | 332552 | |
| C18DSL | 324572 | | | 319825 | |
| C3607DA | | 361087 Rotor | 341002 Wiring Ass'y | 371907 | |
| CB18DBL | | 361012 Rotor | 340922 Wiring Ass'y | 371322 | |
| CE18DSL | | 339998 | 328195 | 329057 | 999054 |
| CF18DSL | | 361025 | 333796 | 333795 | 999100 |
| CF18DSAL | | 361025 | 333796 | 333795 | 999100 |
| CG18DSDL | 334506 | | | 332552 | 999016 |
| CG36DA | | | | 332552 | 999016 |
| CH18DSL | 333323 | | | 333325 | |
| CH3656DA | 335016 | | | 335018 | |
| CJ18DSL | 328361 | | | 328335 | |
| CJ36DA | | 361125 Rotor | 341059 Wiring Ass'y | 375863 | |
| CJ36DB | | 361125 Rotor | 341060 Wiring Ass'y | | |
| CN18DSL | | 339995 | 328195 | 329057 | 999054 |
| CR18DBL | | 361062 Rotor | 340968 Wiring Ass'y Inc Switch | | |
| CR18DSL | | 360703 | 324468 | 319861 | 999068 |
| CS3630DA | | Arm 360948 | 323156 | 335124 | 999068 |
| CV18DBL | | 337398 | 337400 Wiring Ass'y | | |
| DB3DL2 | 332755 | | | 333316 | |
| DH18DBL | | 361035 Rotor | 370954 Wiring Ass'y | 370322 | |
| DH18DBQL | | 361035 Rotor | 370954 Wiring Ass'y | 370322 | |
| DH18DSL | | 360809 | 328482 | 328484 | 999100 |
| DH36DPA | | 361072 Rotor | 372867 Wiring Ass'y | 370322 | |
| DH36DPC | | 361072 Rotor | 372867 Wiring Ass'y | 370322 | |
| DH36DAL | | 360801 | 323156 | 328058 | 999090 |
| DH36DMA | | 361085 Rotor | 341000 Wiring Ass'y | 373096 | |
| DN18DSL | | 360980 | 337433 | 337282 | 999054 |
| DS18DBEL | | 336380 Rotor | 335952 Wiring Ass'y | | |
| DS18DBL | | 331710 | 340765 | 331715 | |
| DS18DBL2 | | 339763 Rotor | 370832 Wiring Ass'y | | |
| DS18DJL | 337115 | | | 336630 | |
| DS18DSDL | | 360930 | 334442 | 333640 | 999054 |
| DS18DSFL | 332558 | | | 332822 | |
| DS18DSL | | 360860 | 322520 | 329173 | 999054 |
| DS36DA | | 361070 Rotor | 373161 Wiring Ass'y Inc Switch | | |
| DV18DBL | | 333528 | 340765 | 331715 | |
| DV18DBL2 | | 339763 Rotor | | | |
| DV18DJL | 332020 | | | 336630 | |
| DV18DSDL | | 360932 | 334442 | 333640 | 999054 |
| DV18DSFL | 332020 | | | 332822 | |
| DV18DSL | | 360860 | 322520 | 329173 | 999054 |
| DV36DA | | 361070 Rotor | 373161 Wiring Ass'y Inc Switch | 370151 | |
| G18DBAL | | 36099 Rotor | 339227 Wiring Ass'y Inc Switch | 329057 | |
| G18DBBAL | | 360991 Rotor | 371691 Wiring Ass'y | 371332 | |
| G18DBL | | 360991 Rotor | 337878 Wiring Ass'y | 329057 | |
| G18DSL | | 360804 | 328195 | 329057 | 999054 |
| G3613DA | | 361075 Rotor | 340986 wiring Ass'y | | |
| G3613DB | | 361075 Rotor | 340987 wiring Ass'y | | |
| NR1890DBCL | | 361071 Rotor | 372291 Wiring Ass'y | 371019 | |
| NT1850DBSL | | 361054 Rotor | 370930 Wiring Ass'y | | |
| NT1865DBAL | | 361054 Rotor | 370932 Wiring Ass'y | | |
| NT1865DBSL | | 361054 Rotor | 370931 Wiring Ass'y | | |

| MODEL | MOTOR | ARMATURE | MAGNET | SWITCH | BRUSHES |
|-----------|--------|---------------------------|--------------------------------|------------|---------|
| P18DSL | | 360969 | 319846 | 319825 | 999017 |
| R18DSAL | 337805 | | | 333324 | |
| R18DSL | 331402 | | | | |
| RB18DSL | 328615 | | | 334699 Kit | |
| RB36DA | | 335194 Rotor | 373113 Wiring Ass'y | | |
| VB3616DA | | 361125 Rotor | | 376000 | |
| WF18DSL | | 360958 | 333735 | 332459 | 999054 |
| WH18DBDL | | 332188 Rotor | 332201 Wiring Ass'y Inc Switch | 334903 | |
| WH18DBDL2 | | 361046 Rotor | | 339217 | |
| WH18DDL | | 335325 Rotor | 337892 Wiring Ass'y Inc Switch | 335523 | |
| WH18DSDL | | 360947 | 334901 | 334956 | 999054 |
| WH36DB | | 361046 Rotor | 373024 Wiring Inc Switch | 339217 | |
| WR18DBDL | | 332188 Rotor | 332203 Wiring Ass'y Inc Switch | 334903 | |
| WR18DBDL2 | | 361055 Rotor | 370942 Wiring Ass'y Inc Switch | 339217 | |
| WR18DSDL | | 360947 | 334901 | 334956 | 999054 |
| WR18DSHL | | 360992 | 333796 | 333795 | 999100 |
| WR36DA | | 361077 Rotor Inc Bearings | 373029 Wiring Inc Switch | 339217 | |
| WR36DB | | 361077 Rotor Inc Bearings | 373050 Wiring Inc Switch | 339217 | |
| WR36DC | | 361055 Rotor | 341066 Wiring Ass'y | 339217 | |

CORDLESS ACCESSORIES - MAJOR PARTS

| MODEL | BULB | LENS | LAMP | LAMP COVER | LAMP CAP |
|---------|--------|--------|--------|------------|----------|
| UB10DL | 330267 | | | | |
| UB12D | | 318540 | | | |
| UB12DL | | | 323339 | | |
| UB18D | 318767 | 318540 | | | |
| UB18DAL | 318767 | 318540 | | | |
| UB18DL | | | 323339 | | |
| UB18DSL | | | 323339 | | |

AC | Major Parts List

| MODEL | ARMATURE | FIELD | SWITCH | CARBON BRUSHES | CARBON BRUSHES AUTOSTOP |
|-------------|--------------|----------------------|---------|----------------|----------------------------|
| AW100 | | | 335554 | | |
| AW130 | 335592 Motor | 335592 Motor | 335554 | | |
| AW150 | 335648 Motor | 335648 Motor | 335554 | | |
| B16RM | 326396 Motor | 326396 Motor | 726811 | | |
| C10FCE2(H1) | 360695F | 340687F | 326700 | 999065 | |
| C10FCH2(H1) | 360695F | 340687F | 326700 | 999065 | |
| C10FL | 326432 Motor | 326432 Motor | | | |
| C10FSB | 360898F | 340779F | 998868 | 999043 | |
| C10FSH | 360898F | 340779F | 998868 | 999043 | |
| C12LCH | 360710F | 340625F | 320950 | 999065 | |
| C12LSH(H1) | 360790C | 340703F | 324424 | 999065 | |
| C12RSH(H1) | 360790C | 340703F | 324424 | 999065 | |
| C12RSH2(H1) | 361021D | 340925E | 324424 | 999065 | |
| C6MEY(H1) | 361011 Rotor | 340913B Wiring Ass'y | 338900 | | |
| C6MFA | 360694F | 340614F | 963756Z | 999043 | |
| C6SS | 360883F | 340614F | 331259 | 999043 | |
| C7MFA(H6) | 360694F | 340614F | 963756Z | 999043 | |
| C7SB2(H6) | 360577H | 340528H | 320969 | 999038 | |
| C7UY | 360882F | | 963756Z | 999043 | |
| C7YA(FCB) | 360187F | 340199F | 302446 | 999038 | |
| C8FSE(H1) | 360839F | 340729F | 324424 | 999001 | |
| C8FSHE(H1) | 360839F | 340729F | 324424 | 999001 | |

| MODEL | ARMATURE | FIELD | SWITCH | CARBON BRUSHES | CARBON BRUSHES AUTOSTOP |
|----------------|--|--|---------|----------------|----------------------------|
| C9BA2(H1) | | | 325357 | 999038 | |
| C9SA2(H1) | 360759F | 340660R | 325357 | 999038 | |
| C9SA3(H6) | 361033F | 340942H | 370260 | 999038 | |
| CC14SF | 360732F | 340643F | 976825 | 999044 | |
| CC16SA | 951875F | | 951864 | 999044 | |
| CC16SB | 977174 Motor 3PH | 977174 Motor 3PH | | | |
| CE16SA | 360622F | 340567F | 314603 | 999021 | |
| CJ110MV | 360741F Until 11/05 360764F Since 12/05 | 340545E Until 11/05 340666E Since 12/05 | 325085 | 999041 | |
| CJ110VMA | | 340545E | 955509 | 999041 | |
| CJ160V(H1) | 361014E | 340915E | 339021 | 999041 | |
| CJ160VA(H1) | 361014E | 340915E | 330698 | 999041 | |
| CJ90VST(H1) | 360893E | 340774E | 325085 | 999041 | |
| CM12Y | 360287F | 340349F | 307650 | 999044 | |
| CN16SA | 360622F | 340567F | 314603 | 999021 | |
| CR13V | | 340563K | 327130 | 999043 | |
| CR13VA | | | 320142 | 999043 | |
| CR13VBY(H1) | 360795F | 340698F | 320142 | 999043 | |
| CS35SB(H1) | 338818 Motor | | 338827 | | |
| CS40SB(H1) | 338818 Motor | | 338827 | | |
| CV350V(H1) | 360984F | | 335460 | 999005 | |
| D10VC2 | 360596E | 340547F | 321632 | 999041 | |
| D13 | 981657F | | 971667Z | | 999073 |
| D13VB3 | 360652F | 340587F | 322854 | 999041 | 999072 |
| D13VL(H6) | 361003F | 340906F | 338756 | 999088 | |
| D13VF | 360543F | 340504E | 320195 | 999041 | 999072 |
| D13VG | 360543F | 340504E | 320195 | 999041 | 999072 |
| D6SH | 360439F | 340391E | 994734 | 999041 | 999072 |
| DH22PG(H1) | 360798F | 340701F | 331454 | 999041 | 999072 |
| DH24PB3 | 360720F | 340635F | 331454 | 999041 | 999072 |
| DH24PC2 | | | 322825 | 999088 | 999076 |
| DH24PC3 | 360720F | 340635F | 331454 | 999041 | 999072 |
| DH24PG(H1) | 360962F | 340866F | 335796 | 999041 | 999072 |
| DH26PC(H1) | 360961F | 340850F | 335796 | 999041 | 999072 |
| DH28PC(H1) | 360857F | 340739J | 331677 | 999004 | |
| DH26PC2 | | | | 374610 | 999041 |
| DH28PCY(H1) | 360961F | 340850F | 335796 | 999041 | 999072 |
| DH28PEC | 375583 | 361104 Rotor | | 374452 | |
| DH30PC2 | | | | | 999073 |
| DH38MS(H1) | 360875F | 340753f | 313093 | 999043 | |
| DH40MC(H1) | 361058F | 340963F | 371171 | 999043 | 999073 |
| DH40MR | 360591F | 340542F | 313093 | 999043 | 999073 |
| DH40MRY(H1) | 360591F | 340680E | 990941 | | 999073 |
| DH40MEY(H1) | 337578 | 340885E | 337587 | | |
| DH45MR | 360737F | 340646F | 313093 | | 999071 |
| DH45MEY(H1) | 337578 Rotor | 340885E | 337587 | | |
| DH50MRY | 360819F | | 990941 | | 999074 |
| DH52MEY(H1) | 360992 | 340899 | 337587 | | |
| DV13VSS(HA) | 360864G | 340743G | 330716 | 999041 | 999072 |
| DV16V | 360626E | 340573F | 321632 | 999041 | 999072 |
| DV16VSS(HA) | 360863F | 340742F | 330716 | 999041 | 999072 |
| DV18V | 360655F | 340589F | 322854 | 999041 | 999072 |
| DV20VB2(H8) | 360781F | 340587F | | 999041 | 999072 |
| DV20VB2-SC(H9) | 360781F | 340587F | | 999041 | 999072 |
| DV20VD(H1) | 361003F | 340906F | 338756 | 999088 | |
| DV22V(H6) | 361002F | 340905E | 338756 | 999088 | |
| FCJ65V3 | 360724F | 360724F | 323086 | 999041 | 999072 |

| MODEL | ARMATURE | FIELD | SWITCH | CARBON BRUSHES | CARBON BRUSHES AUTOSTOP |
|------------|----------|---------|---------|----------------|----------------------------|
| FDV16VB2 | 360207F | 340222F | 321632 | 999041 | 999072 |
| FSV10SA | 360681F | | | 999041 | 999072 |
| G10SD2 | 360497F | 340441F | 321208 | 999088 | 999076 |
| G10SN(H1) | 360891G | 340791J | 314603 | 999005 | |
| G10SQ(H1) | 360891G | 340771J | 314603 | 999005 | |
| G10SR3 | 360799E | 340702F | 314603 | 999005 | |
| G10SR4 | 361016E | 340016F | 339149 | 999067 | |
| G12SE2 | 360603F | 340551F | 311739 | 999088 | 999076 |
| G12SR3 | 360799E | 340702F | 314603 | 999005 | |
| G12SR4 | 361016E | | 339149 | 999067 | |
| G13BY(H1) | 372887 | 372890 | 372892 | 372939 | |
| G13SB3 | 360734E | 340645F | 319319 | 999088 | 999076 |
| G13SW(H6) | 360970F | 340870F | 314603 | 999088 | |
| G13SC2 | 360433F | 340383F | 313278 | 999043 | |
| G13SE2 | 360603F | 340551F | 311739 | 999088 | 999076 |
| G13SQ(H1) | 360891G | 340771J | 314603 | 999005 | |
| G13SR3 | 360799E | 340702F | 314603 | 999005 | |
| G13SR4 | 361016E | | 339149 | 999067 | |
| G13VA(H1) | 360869E | 340749E | 314603 | 999088 | 999076 |
| G13YC2 | 360869E | 340823E | 321099 | 999088 | 999076 |
| G18SE3 | 360594F | 340546F | 320238 | 999061 | 999089 |
| G18UBY(H1) | 360777E | 340682E | | 999061 | 999089 |
| G18UC(H1) | 360594F | 340846E | 335122 | 999061 | |
| G18UDY(H1) | 360594F | 340846E | 370378 | 999061 | |
| G23SE2 | 360594F | 340546F | 320238 | 999061 | 999089 |
| G23SR | 360762E | | 320238 | 999044 | 999074 |
| G23SS(H1) | 360852E | | | 999038 | |
| G23ST(H1) | 360982F | 340888F | 320238 | 999059 | |
| G23UB2 | 360594F | 340546F | 320371 | 999061 | 999089 |
| G23UBY | 360594F | 340682E | 320371 | 999061 | 999089 |
| G23UDY(H1) | 360594F | 340846E | 370378 | 999061 | |
| GP13 | 951003F | 340435H | 971824Z | 999038 | |
| GP2 | 985134F | 985133F | 980778 | 999021 | |
| GP2S2(H1) | 360879F | 340758L | 332805 | 999088 | 999076 |
| GP3V(H1) | 360911F | 340827F | 314603 | 999088 | 999076 |
| GP5V(H1) | 360914F | 340829F | 314603 | 999088 | 999076 |
| H41MB | 360903F | 340788H | 306143 | 999043 | 999073 |
| H45MEY(H1) | 337578 | 340885E | 337587 | | |
| H45MR | 360571F | | 306143 | | 999073 |
| H45MRY(H1) | 360571E | 340681E | 306143 | | 999073 |
| H60MEY(H1) | 360992 | 340899 | 337587 | | |
| H65SB2 | 360286F | 340259H | 306143 | | 999086 |
| H65SB3(H1) | 361024F | 340928F | 337051 | 999086 | |
| H90SB | 360073F | 340014F | 981533Z | | 999086 |
| H90SG(H1) | 360974F | 340876F | 337051 | | 999086 |
| M12SA2 | 360750F | 340668H | 301821 | 999044 | |
| M12SE(H1) | 360888F | 340668M | 331812 | 999038 | |
| M12V2 | 360748E | | 301821 | 999044 | |
| M12VE(H1) | | 340659M | 331812 | 999038 | |
| M6SB | 360428F | 340374H | 955509 | 999021 | |
| M8SA2 | 360775F | 340677F | 314603 | 999043 | |

| MODEL | ARMATURE | FIELD | SWITCH | CARBON BRUSHES | CARBON BRUSHES AUTOSTOP |
|-------------|--------------|---------|---------|----------------|----------------------------|
| M8V2 | | 340675F | 314603 | 999043 | |
| P13F | 328164 | 328166 | 326429 | 326458 | |
| P20SB(TCT) | 958697F | 958693H | 963756Z | 999021 | |
| P20SF(H1) | 360936F | 340834F | 334474 | 999021 | |
| P20ST | 360942F | 340834F | 334474 | 999021 | |
| RB40VA | 360683F | 340602J | 323086 | 999021 | |
| RP150YB(H1) | 337472 Motor | | 338471 | | |
| RP350YE(H1) | 337472 Motor | | 338471 | | |
| RP30Y | | | | 905264AG02 | |
| SAT-180 | 953297F | 953231H | | 999043 | |
| SAY150A | 980785F | | 980778 | 999021 | |
| SB10V2(H1) | 360797F | 340700H | 325085 | 999043 | |
| SB8V2 | 360797F | 340700H | 325085 | 999043 | |
| SP18VA | 360576E | 340526E | 321449 | 999043 | |
| SV12SD | | | 971667Z | 999041 | 999072 |
| SV12SG | | 340578F | 311948 | 999041 | 999072 |
| SV12SH | | 340578F | 311948 | 999041 | 999072 |
| SV13YA(H1) | 360696F | 340616F | 311948 | 999041 | 999072 |
| SV13YB(H1) | 360698F | 340618F | 311948 | 999041 | 999072 |
| SV15YC(H1) | 371861 | 371856 | 371854 | 371859 | |
| VB16Y | 360552F | 340500F | | 999043 | |
| VTV16 | 981611F | | 318344 | | 999073 |
| W6VB3 | 360675F | 340599E | 323479 | | 999091 |
| W8VB2 | 360675F | 340599E | 323479 | | 999091 |
| | 360687F | 340605F | 985103 | 999021 | |
| WR16SE(H1) | 337203 | 340882 | 337202 | | |
| WR22SA | 360700F | 340620F | 985103 | 999043 | |
| WR22SE(H1) | 360990 | 340897F | 337202 | | |
| WR25SE(H1) | 360989 | 340895F | 337202 | | |

| MODEL | MOTOR | V-BELT | SWITCH |
|--------|--------|--------|--------|
| B16RM | 326396 | 726521 | 726811 |
| C10FL | 326432 | | 326429 |
| CC16SB | 977174 | 964640 | 317841 |

Conditions of Limited Warranty

Selected HiKOKI Products

APPLICABLE TO PURCHASES MADE ON OR AFTER 17 JUNE 2019



*6 year warranty on selected products with online registration.
For details visit www.hikokipowertools.com.au

HiKOKI Power Tools Australia Pty Ltd ('HiKOKI') warrants that selected products and services supplied by it and purchased by you from Authorised HiKOKI Dealers throughout Australia are free of defects and come with a limited warranty ('Warranty'). The selected HiKOKI products that come with a limited warranty are specifically set out in the 'Warranty Period and Selected Products' table in this Warranty. The services to which any Warranty applies are those services that are performed with an express warranty. For the avoidance of doubt, the selected HiKOKI product types that are set out in the 'Warranty Period and Selected Products' table include both the HiKOKI-branded and Hitachi-branded versions of those HiKOKI product types, provided that the products are purchased on or after 17 June 2019. All other HiKOKI products that are not listed in the Warranty Period and Selected Products table and other products listed under Warranty Exclusions are excluded from this express warranty.

Warranty Claims

If you consider that any Service or selected product listed in the Warranty Period and Selected Products table supplied by HiKOKI is defective, you can lodge a claim under this Warranty and any apparent fault will be rectified free of charge by HiKOKI or a HiKOKI Authorised Service Dealer within the applicable Warranty Period for that selected product or Service, which is effective from the date of purchase provided that you meet the following conditions;

- ☐ You must produce the original invoice or other proof of purchase document disclosing the purchase date.
- ☐ All costs of installation, cartage, freight, travelling expenses, hiring tools and insurance are paid by the customer.
- ☐ The product, being precision equipment, has not been misused, adjusted or serviced by any person other than a HiKOKI Authorised Service Dealer.
- ☐ The equipment has been installed correctly and is used in accordance with the HiKOKI instructions supplied with the product.

HiKOKI offers this Warranty to you in addition to all other rights and remedies that you may have under law in relation to the selected products to which this Warranty relates.

If the supply of the Selected Products is a consumer sale pursuant to the Australian Consumer Law, the following statement applies. In this statement, 'goods' means the Selected Products, 'services' means any of HiKOKI's services that come with an express warranty, and 'our' means HiKOKI.

Our goods and services come with guarantees that cannot be excluded under the Australian Consumer Law. For major failures with the service, you are entitled:

- to cancel your service contract with us; and
- to refund for the unused portion, or to compensation for its reduced value.

You are also entitled to choose a refund or replacement for major failures with goods. If a failure with the goods or service does not amount to a major failure, you are entitled to have the failure rectified in a reasonable time. If this is not done you are entitled to a refund for the goods and to cancel the contract for the service and obtain a refund of any unused portion. You are also entitled to be compensated for any other reasonably foreseeable loss or damage from a failure in the goods or services.

Notwithstanding the proceeding clause, HiKOKI's liability in respect of a breach of a consumer guarantee or any warranty made under these Conditions of Limited Warranty for any of the selected products or services not of a kind ordinarily acquired for personal, domestic or household use is limited, to the extent permissible by law and at the option of HiKOKI to:

1. with respect to Selected Products:

- replacing the Selected Products or the supply of equivalent products;
- the repair of the Selected Products;
- the payment of the cost of replacing the Selected Products or of acquiring equivalent products; or
- the payment of the cost of having the Selected Products repaired; or

2. with respect to Service:

- supplying the Services again; or
- the payment of the cost of having the Services performed again.

To the extent permitted by law, all other warranties whether implied or otherwise, not set out in these Conditions of Limited Warranty are excluded and HiKOKI is not liable in contract, tort (including, without limitation, negligence or

breach of statutory duty) or otherwise to compensate the customer for:

1. Any increased cost or expenses;
2. Any loss of profit, revenue, business, contracts or anticipated savings;
3. Any loss or expense resulting from a claim by a third party; or
4. Any special, indirect or consequential loss or damage of any nature whatsoever.

If you wish to make a claim under this Warranty, you should:

- ☐ Contact: ph (02) 8887 8100
- ☐ Visit your nearest HiKOKI Customer Service Provider;
- ☐ Visit the HiKOKI website for details: www.hikokipowertools.com.au

These conditions of this Warranty may only be varied with the written approval of the directors of HiKOKI.

Extended Warranty

If a product type in the 'Warranty Period and Selected Products' table has a period of time specified in the column titled 'Extended' applicable to it, then the Warranty Period for the relevant product type will be the period in the 'Extended' column only if:

- (a) the customer registers their contact information and information regarding their purchase of the relevant HiKOKI product/s on HiKOKI's website at www.hikokipowertools.com.au within 4 weeks after the date on which they purchased the relevant HiKOKI product/s; and
- (b) the customer has complied with all other terms and conditions of this Warranty.

The period in the 'Standard' column is the applicable Warranty Period for a product type if:

- (c) no period of time appears in the 'Extended' column for a product type; and
- (d) if a period of time appears in the 'Extended' column for product type but the conditions in (a) and (b) above are not satisfied.

Warranty Period and Selected Products

| Product Type | Warranty Period | |
|---|-----------------|----------|
| | Standard | Extended |
| AC Tools (Electric)* | 3 years | 6 years |
| Cordless tools (Naked) | 3 years | 6 years |
| Ni-Cd & Ni-MH batteries | 1 year | N/A |
| Li-ion batteries | 3 years | N/A |
| Chargers | 3 years | N/A |
| Pneumatic tools (Air) | 3 years | 6 years |
| Outdoor Power Equipment (Engine) | 3 years | 6 years |
| Accessories | 1 year | N/A |
| Hand Tools | 1 year | N/A |
| Any of the above products purchased for the purposes of Hire & Rental | 6 months | N/A |

*Excluding selected AC models as outlined above.

Where HiKOKI provides any express warranty relating to any Service, the applicable Warranty Period to all such services is a period of 3 months.

Warranty Exclusions

This section identifies what is excluded under this Warranty.

This Warranty DOES NOT cover damage caused by you or by anyone else:

- ☐ misusing, overloading or abusing the HiKOKI product,
- ☐ operating the product in a manner that is not in accordance with the HiKOKI instructions supplied with the product (the "Manual"),
- ☐ failing to clean the product in accordance with the instructions for correct and regular cleaning as set out in the Manual,
- ☐ not carrying out periodic maintenance,
- ☐ neglecting or otherwise failing to maintain the product in accordance with the instructions for maintenance of the product including regular tune-ups, lubrication, etc.
- ☐ using incorrect voltage or non-authorised electrical connections with the product,
- ☐ installing the product incorrectly,
- ☐ using non-authorised/non-standard parts, non-genuine HiKOKI parts in connection with the product,
- ☐ repairing or carrying out any work on the product by someone other than an Authorised HiKOKI Service Dealer,
- ☐ causing a double burnout – field and armature burnout,
- ☐ operating the product with any guard, shield or line cutting knife removed, repositioned, or that is incomplete or damaged,
- ☐ using or operating the product with any evidence of partial failure of product or damage being present,
- ☐ tampering with the product in any way other than in accordance with the Manual,
- ☐ not having taken reasonable steps to prevent the damage or failure from occurring to the product,
- ☐ storing the product inconsistently with manufacturer's recommendations or where the product is exposed to corrosive substances such as fertilisers, grass and plant residue including palm tree sap, bore water and other detrimental environmental exposure,
- ☐ making mechanical adjustments that are inconsistent with the Manual—including, chains, bars, engine tuning etc,
- ☐ operating the product with incorrect fuel to oil ratio,
- ☐ having made improper adjustments of ignition timing or the carburetor,
- ☐ using the product with clogged or removed filters (i.e. fuel filter, oil filter, air filter), or
- ☐ using incorrect chain and bar oil for the oil pump.

In addition to the above, this Warranty DOES NOT cover the following:

- ☐ Selected Products purchased:
 - outside of Australia,
 - from a non-Authorised HiKOKI Dealer (such as purchases from unauthorised retailers and purchases over the internet, from local/international sellers or sites such as Ebay),
 - at an auction, or
 - from a private seller,
- ☐ Products not specifically set out in the Warranty Period and Selected Products table contained in this Warranty,
- ☐ Accidental damage or damage caused by an extra ordinary event or circumstance beyond your or anyone else's control including damage caused by:
 - environmental factors,
 - natural discolouration of material due to ultraviolet light,
 - crushing, impact with hard surface or damage caused in the transit of the product,
 - foreign material, or exposure of the product to excessive heat or cold or to solvents, or water entry into the product,
 - abnormal product performance caused by any ancillary equipment interference or other external factors,
- ☐ Damage or failure that occurs for a reason or reasons that were already disclosed to you (in writing or otherwise), prior to your purchase of the product,
- ☐ Damage or defects to the product that ought reasonably to have been revealed to you by an examination of the product, where you conducted such an examination before acquiring the product,
- ☐ Normal wear and tear due to the course of normal use,
- ☐ Freight costs associated with transporting the product between you, the place of purchase, the Authorised HiKOKI Dealer and HiKOKI for the purposes of making a claim pursuant to this Warranty or otherwise,
- ☐ Repairs that are required by you to be made to the product which are simply due to a clogged or restricted exhaust system, carbon deposits in exhaust ports, piston crown or combustion chamber or periodic decarbonising,
- ☐ Selected Products with serial number altered or removed,
- ☐ Refurbished, ex display or factory second selected products,
- ☐ Consumable items supplied with the product or that are a part of the product,
- ☐ Service parts,
- ☐ Accessories, that for the avoidance of doubt include but are not limited to the following: those included with the product at the time the product was purchased by you including cases & site bags, brushes, chucks, cord sets, bulbs, LED's & lamps, driver & drill bits, blades, driver blades, o-rings, switches & triggers, power tool attachments, blades & cutters, spark plugs, carburetor kits, filters, bars & chains, cutting equipment, recoil springs, rope & belts, measuring devices, air (pneumatic) fittings, nose caps, gaskets, fuel hoses, or
- ☐ The product coming into contact with sand, water, rust, corrosion, fire, vermin and insect infestation, power outages or surges or inadequate voltage or current.

If the selected product you are using has been rented or leased by you, and you consider a claim might be made under this Warranty, you should refer the matter to the rental or leasing company immediately and they will handle the matter.

This Warranty does not cover service costs in replacing and maintaining consumable parts and accessories that have ceased working through normal wear and tear such as, but not limited to: drill heads, blades, cutters and other parts classifiable as a consumable part or accessory.





6 YEAR
POWER TOOLS
WARRANTY*

OUR BEST WARRANTY EVER. GUARANTEED.

Get your work done faster and easier, safe in the knowledge HiKOKI Power Tools are manufactured to exacting, world class standards. All backed by the peace of mind of our industry-leading **6 Year Warranty**.* It's one more reason why you can have complete confidence in the tools you use, and the company who backs them. HiKOKI has over 70 years of power tool experience and an unmatched track record of innovation as Hitachi. Visit hikokipowertools.com.au

HiKOKI
HIGH PERFORMANCE POWER TOOLS

*6 year warranty on selected products with online registration.
For details visit www.hikokipowertools.com.au

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.



HiKOKI Power Tools

HIKOKI POWER TOOLS AUSTRALIA PTY. LTD.
ABN 27 072 677 153

Unit 1, 10 Boden Road, Seven Hills NSW 2147

Telephone: (02) 8887 8100

Follow us on our socials and never
miss out on HiKOKI news



hikokipowertools.com.au

Koki Holdings Co., Ltd.

Shinagawa Intercity Tower A, 20th floor 15-1,
Konan 2-chome, Minato-ku, Tokyo 108-6020, Japan

Tel. +81-3-5783-0601

Fax +81-3-5783-0709

www.koki-holding.com