

# HIKOKI

UNLEASH the NEXT

Cordless Rotary Hammer

18V-5.0Ah 18mm 2-Mode DH 18DPB

SDS  
plus  
Shank

NEW

BRUSHLESS

RFC  
REACTIVE FORCE CONTROL

# EASY. FAST. EFFICIENT.

Compact and Lightweight Design  
with the Class-Leading\* Drilling Speed

CORDLESS ROTARY HAMMER DH 18DPB



\* As of December 2020, among cordless rotary hammers in the same class (18V DH18DPB [2-mode]:13 - 18mm) made by leading power tool manufacturers. (Survey by Koki Holdings)

# EASY. FAST. EFFICIENT.


Compact and Lightweight Design with the Class-Leading\*<sup>1</sup> Drilling Speed

## Compact and Lightweight Body for Ease of Use




- 2-step Rotation Speed for Different Applications
- Built-in Auto Stop Function for Consistently Drilling Holes
- Bright LED Light
- Reactive Force Control against Sudden Overburdening

## Class-Leading\*<sup>1</sup> Drilling Speed Optimal for Drilling Small Holes

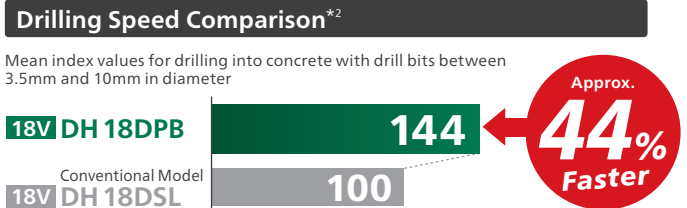

Comparisons of speeds when the index of the conventional model is considered 100

## High Durability Brushless Motor Delivers 2.2x\*<sup>3</sup> More Runtime per Charge

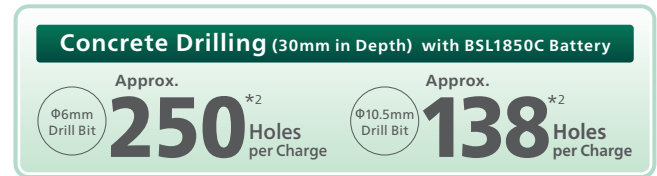

### Cordless Rotary Hammer

**18V DH 18DPB**

**Pistol Grip**



Drill bit sold separately.

**BRUSHLESS**  
**RFC**  
REACTIVE FORCE CONTROL

### Cordless Rotary Hammer

**18V DH 18DPA**

**L Shape**



Drill bit sold separately.

**BRUSHLESS**  
**LVH RFC**  
LOW VIBRATION-HIGH FORCE REACTIVE FORCE CONTROL

### Belt Hook (Optional)

Users can hook the tool to their belt loop when it is not in use.

**Hook** Code No.372200  
**Screw** Code No.337357



### Specifications

Model		DH 18DPB	
Capacity	Concrete	18mm	
	Steel	13mm	
	Wood	18mm	
Battery Voltage		18V	
Bit Shank		SDS-plus	
Impact Energy		1.3J* <sup>4</sup>	
No Load Speed	Normal	0 - 1,080/min	
	Low	0 - 800/min	
Full Load Impact Rate	Normal	0 - 5,500/min	
	Low	0 - 4,100/min	
Overall Length		235mm	
Weight* <sup>5</sup>		2.0 - 2.6kg* <sup>6</sup> / 2.1kg (BSL1850C)	
Vibration Total Values (triax vector sum)* <sup>7</sup>	Hammer Drilling Into Concrete	Vibration emission value ah, HD = 10.4m/s <sup>2</sup>	Uncertainty K = 1.5m/s <sup>2</sup>
Standard Accessories* <sup>8</sup>		2 Batteries (BSL1850C), Charger (UC18YFSL), Side Handle, Depth Gauge, Battery Cover, Carrying Case	

\*1. As of December 2020, among cordless rotary hammers in the same class (18V DH18DPB [2-mode]: 13 - 18mm) made by leading power tool manufacturers. (Survey by Koki Holdings)

\*2. The values are shown for reference purposes and may vary according to materials and conditions.

\*3. Vs. the DH18DSL cordless rotary hammer. The value is shown for reference purposes and may vary according to materials and conditions. (Test condition:Φ6.0mm in Diameter, 30mm in depth)

\*4. Impact energy according to EPTA-Procedure 05 (Ver.2.0).

\*5. Weight according to EPTA-Procedure 01/2014. Weight varies depending on the battery used.

\*6. 2.6kg with BSL36B18 battery (sold separately).

\*7. The vibration total values were determined according to EN60745.

\*8. Standard accessories vary by country or area.

Distributed by:

